




The URM LH 48C UNI optical distribution box is designed for the placement of 24/48 optical connectors indoors and outdoors. The distribution box may be complemented by a bracket, which enables it to be post-mounted.

Maximum capacity of adapters is 12× SC simplex or 12× SC duplex or 12× LC duplex or 12× LC QUAD
2× KM4 splice tray for the placement of optical splices
Possibility of PLC splitter placement
2× PG bushing for input cable
24× Dividable rubber bushing 2× 1–3 mm for output patchcords
Lockable door
Use for fibers G652d and G657 a,b

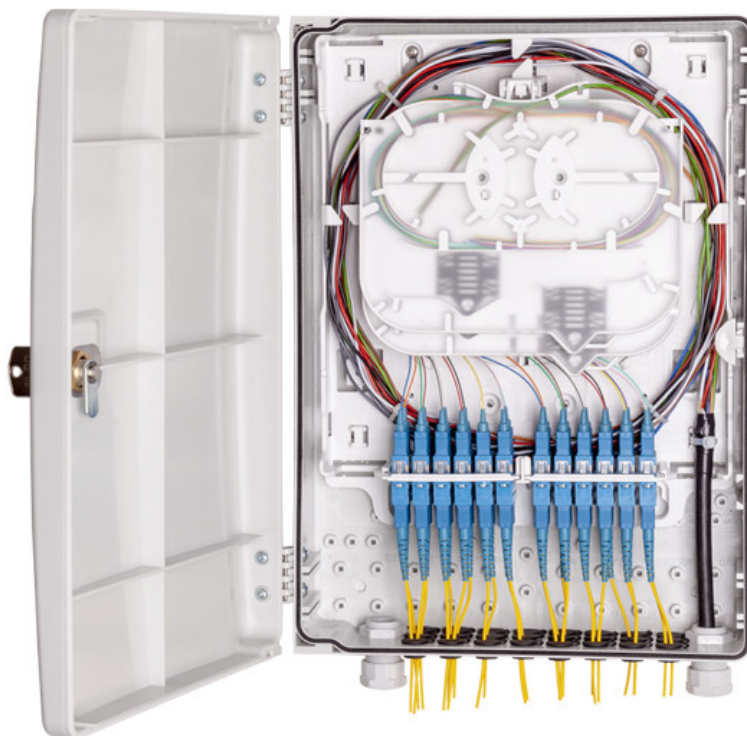


TECHNICAL SPECIFICATIONS

Inputs / Outputs (quantity × range)	2× 8–12 mm, 48× 1–3 mm
Grommets (type and number of used grommets)	2× PG13.5, 24× rubber grommet
Ingress Protection	IP54
Impact Protection	IK10
UV Resistance	yes
Flammability Degree	V0
Temperature Range	–40 °C / +70 °C
Material	PC / ABS
Color	light gray RAL 7035
Dimensions (H × W × D)	350 × 250 × 90 mm
Weight	2.4 kg

ORDERING CODES

85FR.55/0000F

URM LH 48C UNI

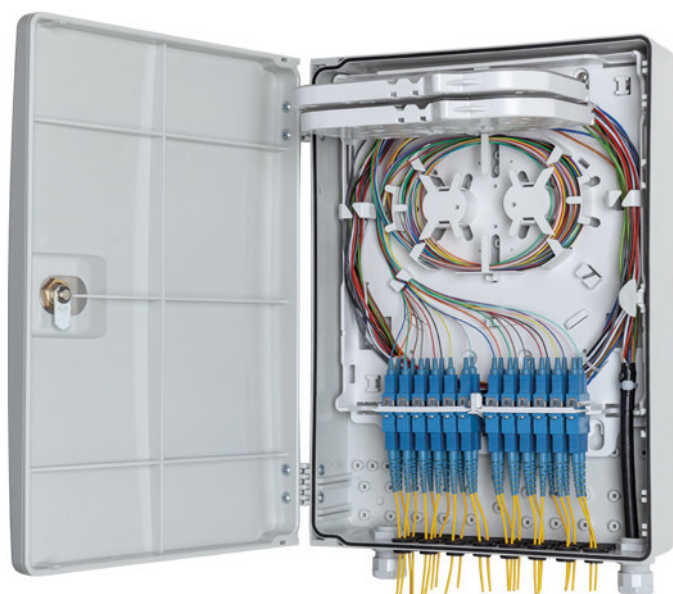

More information: <https://www.micostelcom.com/en/fiber-optic-boxes/urm-lh-48c-uni-wall-mounted-optical-distribution-box>

MICOS
TELCOM s.r.o.

+420 582 307 511
+420 582 307 688

telcom@micostelcom.cz
www.micostelcom.com