




MTeh UNI is designed to be a very versatile Fiber Optic Box, which can realize a wide range of configurations and interconnect fibers in many ways. The box is primarily suitable as a distribution box in FTTH networks. It includes two types of a connector panel and two large Fiber Optic Trays KM 4.

- ▶ Easy installation
- ▶ Removable cover
- ▶ Cable reserves brackets
- ▶ Cable management
- ▶ Ability to splice in the bottom of the box
- ▶ Optional splicing or splitter boxes
- ▶ Removable connector panel for 12x SC simplex or 12xSC duplex
- ▶ Connector plate protected with a cover
- ▶ Gradual grommet Ø 3-14 mm for cable entry from all sides
- ▶ Input for 12 microducts up to Ø 7 mm
- ▶ Preparation for the side entrance of Wall rails
- ▶ Optional wall through installation
- ▶ Mid-span access
- ▶ 2x splice tray KM4 – total capacity 48 splices
- ▶ Maximum capacity 72 splices using splice section in the bottom of the box
- ▶ Duplex adapter point to connect PLC splitter
- ▶ Coverage degree IP 20





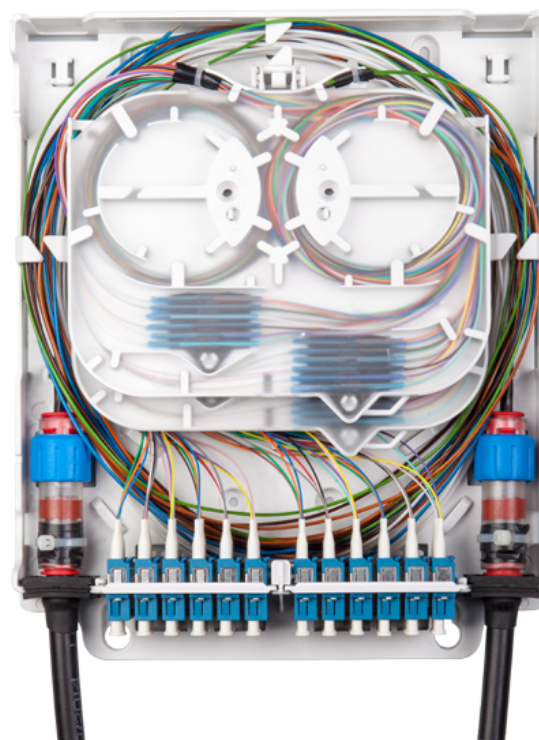


TECHNICAL SPECIFICATIONS

Inputs / Outputs (quantity × range)	2× 3–14 mm
Grommets (type and number of used grommets)	2× stepped grommet
Ingress Protection	IP20
Impact Protection	IK07
Flammability Degree	V0
Material	PC / ABS
Color	white RAL 9003
Dimensions (H × W × D)	340 × 235 × 60 mm
Weight	0.9 kg

ORDERING CODES

85AV.00/0001F	Fiber Optic Box MTeh UNI
85M9.16/0000	Splice Holder TS 12 (for heat shrink splices)
85M9.17/0000	Splice Holder K 12 (for crimp splices)
85SP.02/0000	Multi Cable Grommet (3-14 mm)

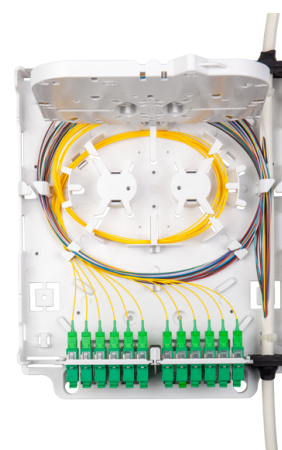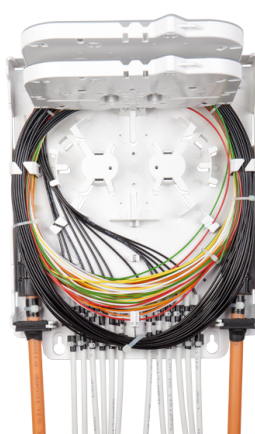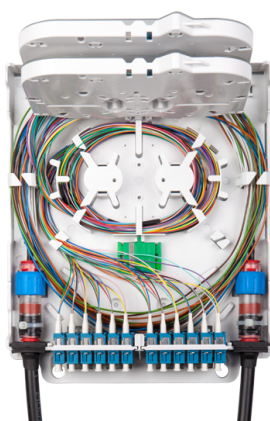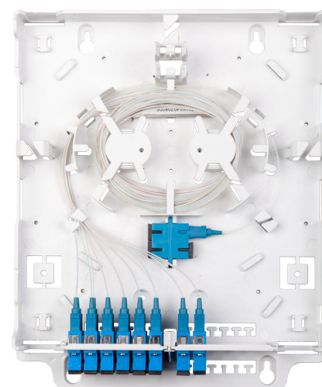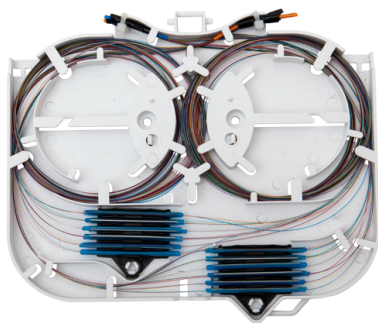

More information: <https://www.micostelcom.com/en/fiber-optic-boxes/fiber-optic-box-mteH-uni>

MICOS
TELCOM s.r.o.

+420 582 307 511
+420 582 307 688

telcom@micostelcom.cz
www.micostelcom.com