


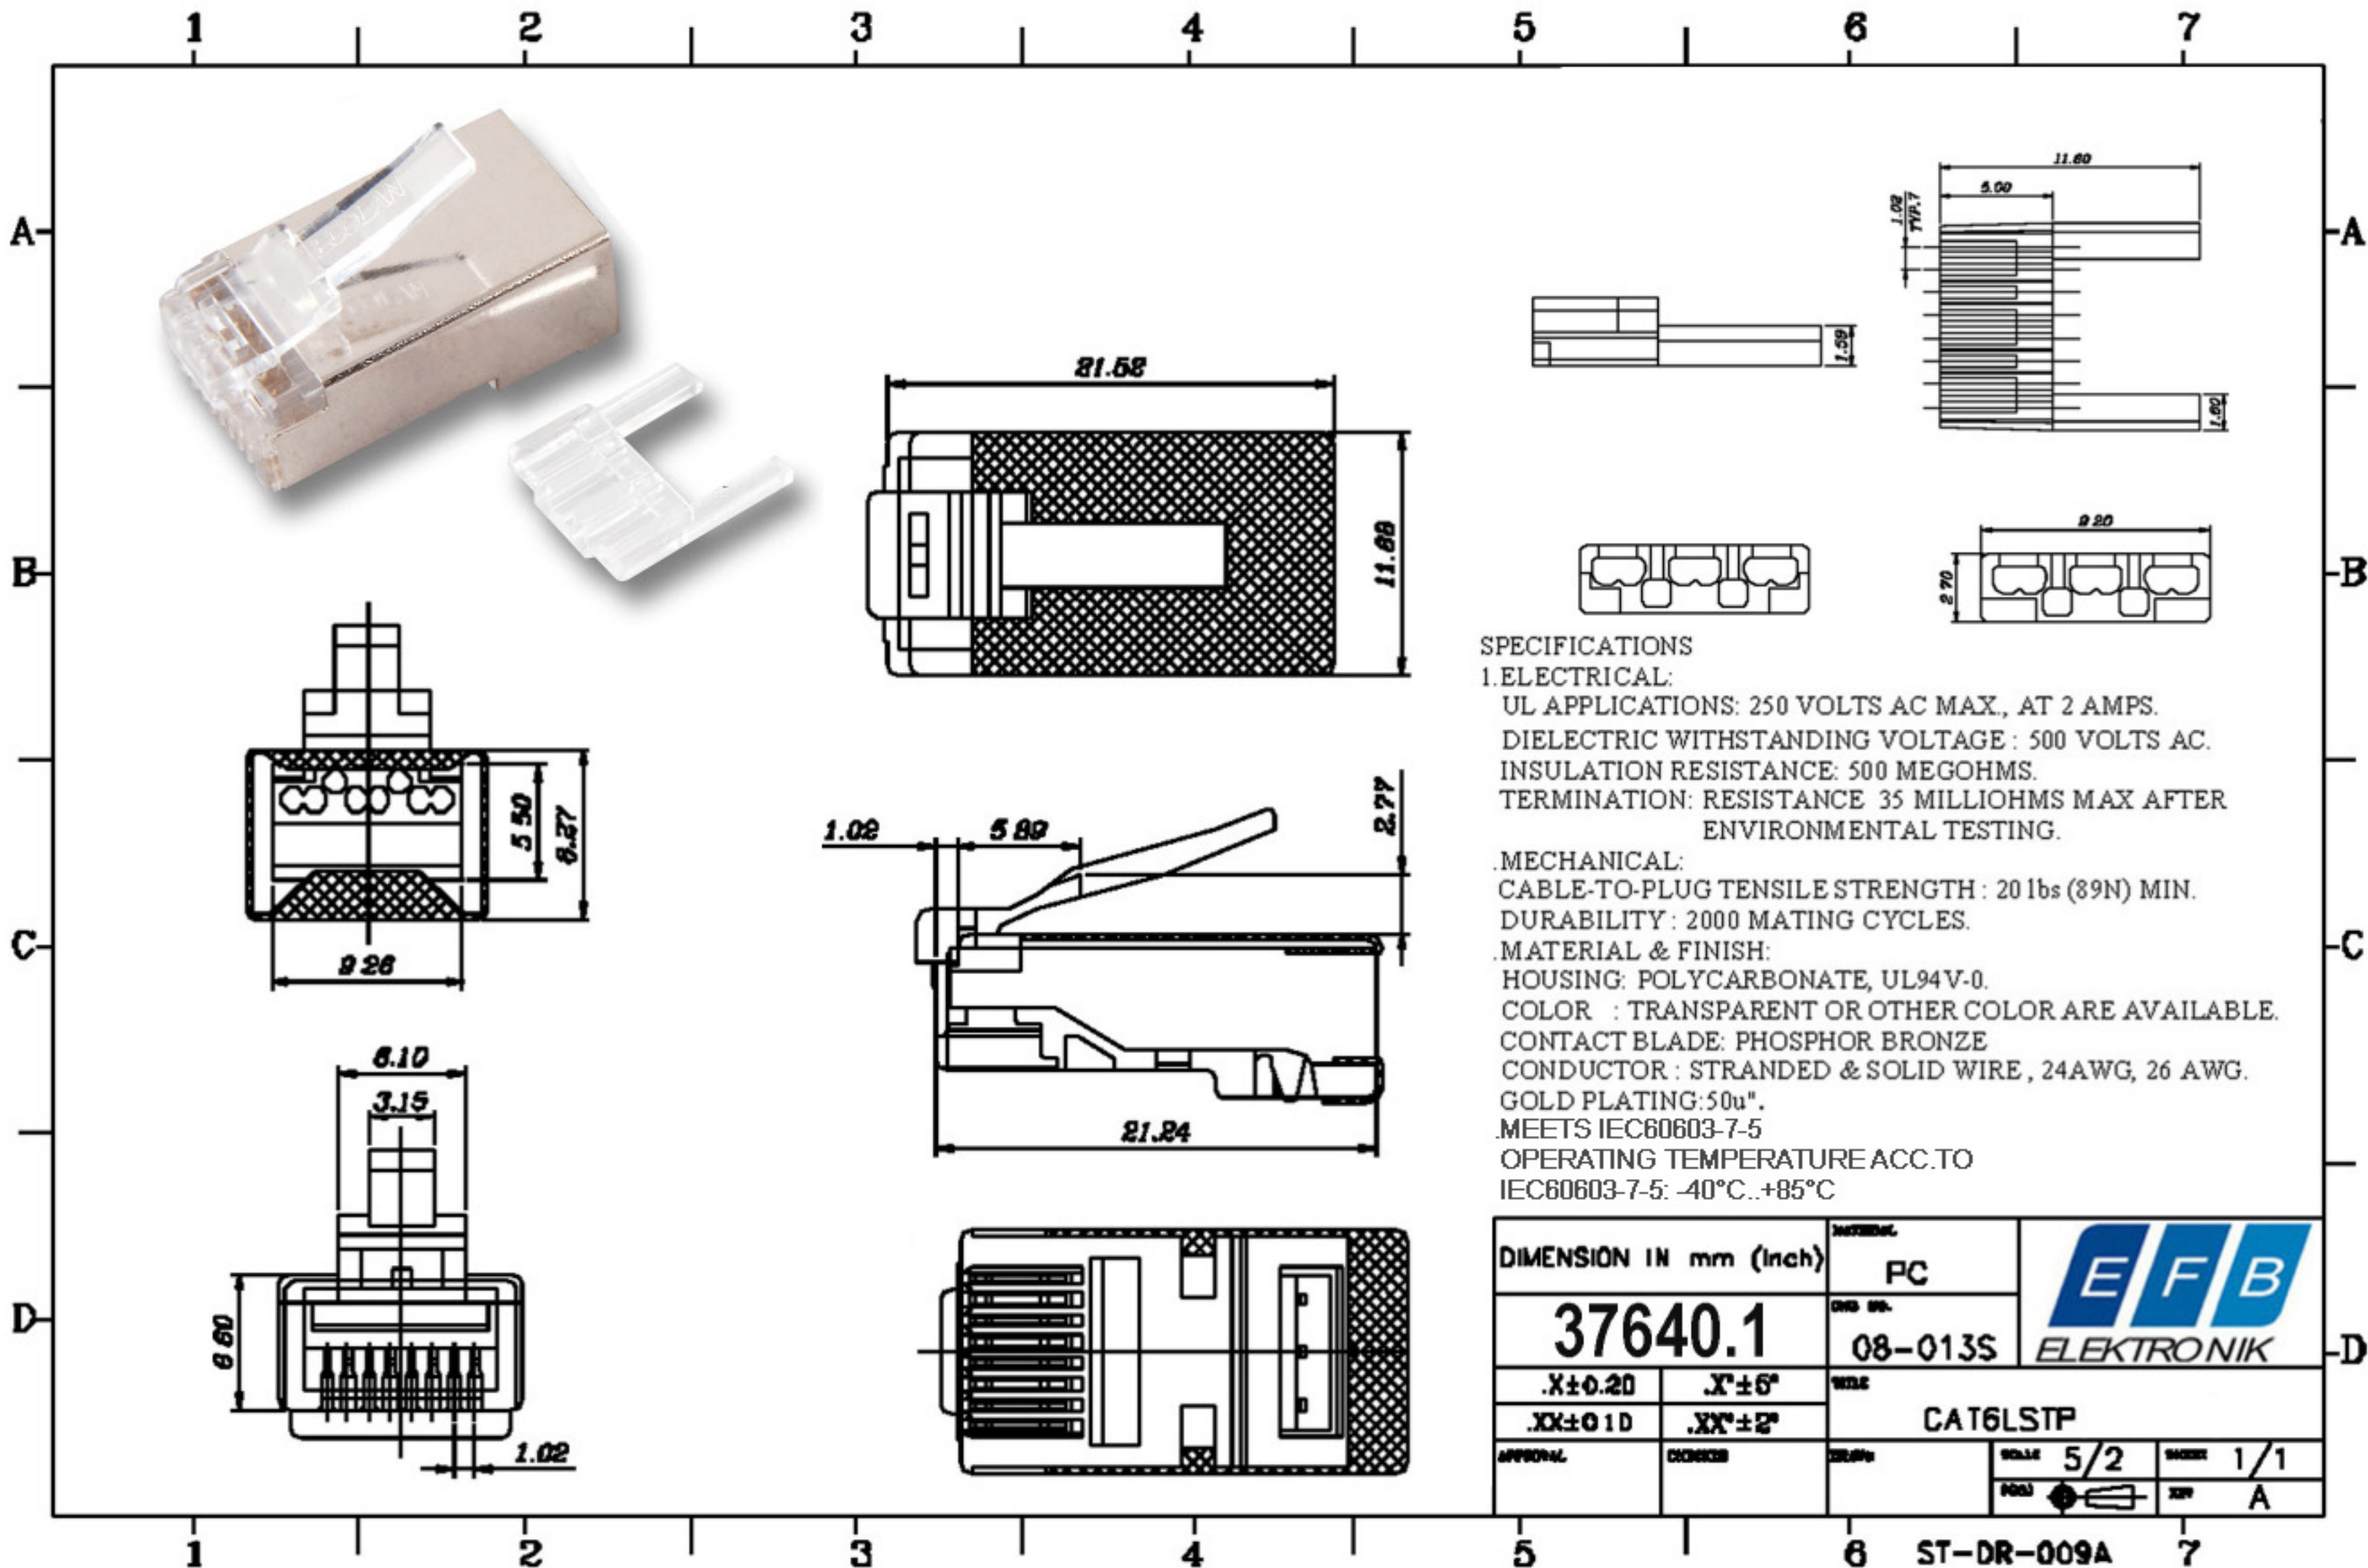

SPECIFICATIONS

1. ELECTRICAL:

UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
 DIELECTRIC WITHSTANDING VOLTAGE : 500 VOLTS AC.
 INSULATION RESISTANCE: 500 MEGOHMS.
 TERMINATION: RESISTANCE 35 MILLIOHMS MAX AFTER ENVIRONMENTAL TESTING.

MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH : 20 lbs (89N) MIN.
 DURABILITY : 2000 MATING CYCLES.

MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-0.
 COLOR : TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
 CONTACT BLADE: PHOSPHOR BRONZE
 CONDUCTOR : STRANDED & SOLID WIRE , 24AWG, 26 AWG.
 GOLD PLATING: 50u".
 MEETS IEC60603-7-5
 OPERATING TEMPERATURE ACC.TO
 IEC60603-7-5: -40°C..+85°C

DIMENSION IN mm (inch)		REVISION		
PC		08-013S		
37640.1		08-013S	CAT6LSTP	
.X±0.20	.X'±5°	WIRE	5/2	
.XX±0.10	.XX'±2°	WIRE	1/1	
APPROVAL	CHECKED	DATE	5/2	1/1
		DATE	5/2	1/1

ST-DR-009A