

Type HF, primary current up to 5000 amps, accuracy classes from 0.2S to 3,
highest system voltage 720 volt

T-Line, current transformers

Catalogue 2018



Powering Business Worldwide

T-Line, current transformers

1. Table for contents	2
2. Description – Current transformers type HF	3
3. Product Overview	4
4. Measuring accuracy – VA Burden	5
5. Survey chart – Accuracy class 0,5 – 1 – 3, type HF3A and HF3B	6
6. Survey chart – Accuracy class 0,5 – 1 – 3, type HF4B and HF5	7
7. Survey chart – Accuracy class 0,5 – 1 – 3, type HF7A, HF6 and HF8A	8
8. Survey chart – Accuracy class 0,2S – 0,2, type HF4B, HF5, HF6, HF7A and HF8A	9
9. Primary winding, at lower primary current.....	10
10. Mountings opportunity.....	11
11. Accessories	12
12. Dimensions, type HF3A and HF3B	13
13. Dimensions, type HF4B	14
14. Dimensions, type HF5 and HF7A	15
15. Dimensions, type HF6 and HF8A.....	16
16. Overview over item numbers.....	17-19

2. Description

2.1 General Description

A current transformer is a central part of a measuring system. There are many reasons why the Eaton Electric through-primary current transformer type HF is something special. One reason is that it is easily mounted - the same transformer can be used for bars as well as for round conductors. Most of the transformers cover, within the same order number, the accuracy classes 0.5, 1 and 3 in one standard series and the accuracy classes 0.2S and 0.2 in the other standard series. Consequently, a minimal number of transformers can cover a wide range of applications thereby reducing the total expenses for investment and storage. Small external dimensions make the HF-series especially attractive for use in modern compact equipment with small phase distances.

The very large aperture can be used for primary winding too. When very small bars and large apertures (HF4B, HF5, and HF7A) are involved, the transformer is mounted on bar by means of an insert. The transformers of the HF-series have qualities that make them suitable for use under difficult operating conditions too.

2.2 Secondary Terminals

The secondary terminals are corrosion-resistant (copper rich alloy and nickel-plated) and vibration-proof (Reakdyn system). Mounting of secondary conductors used to be error prone and costly. Now the conductor can be mounted directly for a modest sum of money (without any further preparations like mounting of cable lug, soldering etc.). The terminals accommodate solid as well as multicore conductors. The secondary terminals have a double connection which permits the shorting of the secondary winding during operation, e.g. when replacing the measuring equipment connected. These reliable terminals are located within the transformer enclosure to avoid unintentional touching or short-circuiting of the terminals.

2.3 Enclosure

The enclosure is moulded in a thermoplastic material (Polycarbonate Lexan® 940) which is heat and impact resistant and self-extinguishing (V-0 according to UL 94). As it has excellent tracking resistance and insulating properties, it permits the mounting of the HF transformers even if there is very little space. The transformer withstands at rated current continuously an ambient temperature up to 55° C at a temperature of 90° C on the primary conductor simultaneously. Insulation class B (IEC61869-1/2).

2.4 Rating Plate

Another point worth noticing is the data label which giving all necessary information such as polarity P1 and P2 for the primary side as well as S1 and S2 for the secondary side. 1 and 2 refer to the flow direction.

The label is mounted on the front of the transformer, therefore you can easily identify the transformer after mounting.

The data label is placed behind a transparent pane, so the data information cannot be scratched off, washed off or damaged in other ways. The data label and the pane are built into the transformer which prevent them from falling off.

2.5 Accessories

The accessories are a very important part of the quality features of a transformer. Eaton Electric therefore uses only carefully constructed high quality equipment which lives up to your expectation for high reliability at reasonable costs.

The main features are: easy mounting without tools, vibration-proof and corrosion-resistant.

Thus the clamps for bar mounting are made of resilient stainless steel. They are therefore able to compensate for the thermal expansions and contractions of the bar and the enclosure, thus securing a stable and vibration-proof fixing. Top hat rail bar fittings and fittings for mounting on base plate are also made of resilient stainless steel.

2.6 Special Application

Due to excellent performance, the HF-range is widely being used on board ships approved by the classification societies.

2.7 General Technical Specifications

Standard:	IEC 61869-1/2 EN 61869-1/2
Highest rated voltage:	0.72 kV
Test voltage one minute:	3 kV
Frequency:	50-60 Hz
Rated secondary current:	5A or 1A
Self-extinguishing enclosure:	UL 94 class V-0
Product approval:	

3. Product Overview

3.1 Measuring accuracy, VA Burden, see page 5.

3.2 Current transformers 0.5 - 1 and 3, see page 6-8.

The survey comprises Eaton Electric's standard range of transformers usually used in connection with instruments and meters with an accuracy range of 1-5%.

3.3 Current transformers 0.2S and 0.2, see page 9.

This survey comprises the standard range of transformers where special precision is needed, mechanical/electronic kWh meters with high precision.

3.4 Primary Winding, at lower Primary Current, see page 10.

If you work with the problem of protection of motors designed to start heavy swing loads, Eaton Electric offers a very reliable and competitive range.

3.5 Accessories for transformers, see page 13 - 16.

3.6 Dimensions of the transformers, see page 17 - 19.

4. Measuring Accuracy

The table 4.1 shows the accuracy classes corresponding to the HF-series.

The accuracy classes must be respected at rated burden according to IEC 61869-2 (VA mentioned at the rating plate of the transformer) as well as at 25% of the rated burden, however not less than 1 VA.

It is valid for all transformers from Eaton Electric that the respective accuracy class is respected from 1 VA till rated burden irrespective of that the 25% of the rated burden could allow a value greater than 1 VA.

Table 4.1: Current- and phase displacement error

Accuracy-classes acc.	Percentage current error +/- % % Rated current (lpm)						Phase displacement +/- minutes % Rated current (lpm)				
	1	5	20	50	100	120	1	5	20	100	120
to IEC 60044-1	1	5	20	50	100	120	1	5	20	100	120
0,2S	0,75	0,35	0,2	-	0,2	0,2	30	15	10	10	10
0,2	-	0,75	0,35	-	0,2	0,2	-	30	15	10	10
0,5	-	1,5	0,75	-	0,5	0,5	-	90	45	30	30
1	-	3	1,5	-	1	1	-	180	90	60	60
3	-	-	-	3	-	3	-	-	-	-	-

The measuring accuracy of a current transformer depend on the total burden in the secondary circuit.

To obtain the measuring accuracy of a given class, the total burden must therefore stay within the output of the current transformer in the required class.

The total burden of the transformer is made up of the burden from the connected instrument (Table 4.2) and wires (Table 4.3).

The tables below may be used as a guide on typical burdens.

Table 4.2: Burden - instrument

Burden instrument	[VA]
Moving iron instrument	0,3 - 1,2
Moving coil instrument	0,3 - 1,2
Bimetal instrument	2,0 - 3,2
KWh-meter/current circuit	0,3 - 4,0

Table 4.3: Burden – wire

Rated secondary Current [A]	Size of conductor [mm ²]	Wire [m] ^{1*}				
		0,5 Copper wire Burden [VA]	1,0 Copper wire Burden [VA]	2,5 Copper wire Burden [VA]	5 Copper wire Burden [VA]	10 Copper wire Burden [VA]
5	1,5	0,29	0,58	1,45	2,9	5,8
5	2,5	0,18	0,35	0,88	1,75	3,5
1	1	0,018	0,035	0,09	0,18	0,35
1	1,5	0,012	0,023	0,06	0,12	0,23
1	2,5	0,007	0,014	0,035	0,07	0,14

*Double wire. With double wire means: From transformer to instrument and return to transformer.

5. Survey chart – Accuracy class 0,5 – 1 – 3, type HF3A and HF3B

HF3A	HF3A						HF3B						
	Accuracy class			Rated secondary current [A]		Accuracy class			Rated secondary current [A]				
	0,5	1	3	5	1	0,5	1	3	5	1			
Rated primary current [A]		Burden [VA]			Article no. 741B00_		Burden [VA]			Article no. 741B00_			
30	-	-	1	-	08	-	-	-	-	-	-	-	
50	-	1	2	11	31	-	-	-	-	-	-	-	
60	-	1	2,5	13	21	-	-	-	-	-	-	-	
75	-	1,5	3	12	32	-	-	-	-	-	-	-	
80	-	2	3	87	88	-	-	-	-	-	-	-	
100	1,5	3	5	14	33	-	-	2	04	06			
125	2,5	3	5	25	89	1	2	2,5	97	23			
150	2,5	5	5	16	34	1	2,5	3	05	07			
200	2,5	5	7,5	17	35	1	2,5	3	18	36			
250	5	5	7,5	27	28	2,5	2,5	4	19	29			
300	-	-	-	-	-	2,5	5	5	20	37			
400	-	-	-	-	-	2,5	5	5	22	38			
500	-	-	-	-	-	2,5	5	5	24	39			
600	-	-	-	-	-	5	5	7,5	26	40			



	Units	HF3A	HF3B
Max. dimension of primary bar	[mm x mm]	5 x 20	10 x 30
Conductor (diameter)	[mm]	17	23
Secondary terminals	[mm ²]	max. 2,5	max. 2,5
I _{th} rms i 1 sec.	[kA]	15	45
Bush	-	741B0321	741B0322
Sealable cover	-	741B0232	741B0232
Clamp (for bar mounting)	-	741B0030	741B0030
Fittings for DIN-Rail	-	741B0231	741B0231
Fittings for base plate	-	741B0230	741B0230

6. Survey chart – Accuracy class 0,5 – 1 – 3, type HF4B and HF5

HF4B



HF5



	HF4B						HF5					
	Accuracy class			Rated secondary current [A]		Accuracy class			Rated secondary current [A]			
	0,5	1	3	5	1	0,5	1	3	5	1		
	Rated primary current [A]	Burden [VA]		Article no. 741C20_		Burden [VA]		Article no. 741E00_				
50	-	-	2	57	54	-	-	-	-	-	-	-
60	-	-	2	58	55	-	-	-	-	-	-	-
75	-	1	2,5	59	56	-	-	-	-	-	-	-
100	1	2,5	5	60	68	-	-	-	-	-	-	-
150	2,5	5	5	61	69	-	-	-	-	-	-	-
200	5	5	7,5	62	70	-	-	-	-	-	-	-
250	5	7,5	10	63	71	-	-	-	-	-	-	-
300	7,5	10	15	64	72	5	7,5	10	11	-	-	-
400	7,5	10	15	65	73	10	10	15	21	28	-	-
500	10	10	15	66	74	15	20	20	22	29	-	-
600	10	15	20	67	75	15	20	20	23	30	-	-
750	-	-	-	-	-	15	20	20	34	35	-	-
800	-	-	-	-	-	20	20	20	24	31	-	-
1000	-	-	-	-	-	30	30	30	25	32	-	-
1200	-	-	-	-	-	30	30	30	26	33	-	-
1250	-	-	-	-	-	30	30	30	37	38	-	-
1500	-	-	-	-	-	20	20	30	27	17	-	-
1600	-	-	-	-	-	20	20	30	39	18	-	-

	Units	HF4B	HF5
Max. dimension of primary bar	[mm x mm]	10 x 40	12 x 60
Conductor (diameter)	[mm]	28	39
Secondary terminals	[mm ²]	max. 6	max. 6
I _{th} rms i 1 sec.	[kA]	60	100
Insert	-	741C0329	741C0329
Sealable cover	-	741C0221	741C0221
Clamp* (for bar mounting)	-	741C0256	741C0256
Fittings for DIN-Rail	-	741C0243	741C0243
Fittings for base plate	-	741H0230	741H0230

* Accessories included with the transformers (number only for spare part ordering).

7. Survey chart – Accuracy class 0,5 – 1 – 3, type HF7A, HF6 and HF8A

HF7A



HF6



HF8A




Rated primary current [A]	HF7A			HF6			HF8A								
	Accuracy class			Rated secondary current [A]		Accuracy class			Rated secondary current [A]		Accuracy class			Rated secondary current [A]	
	0,5	1	3	5	1	0,5	1	3	5	1	0,5	1	3	5	1
200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
400	5	7,5	10	11	24	-	-	-	-	-	-	-	-	-	-
500	7,5	10	15	12	25	-	-	-	-	-	-	-	-	-	-
600	7,5	10	15	13	26	-	-	-	-	-	-	-	-	-	-
750	10	15	20	14	27	-	-	-	-	-	-	-	-	-	-
800	10	15	20	15	28	-	-	-	-	-	-	-	-	-	-
1000	15	20	30	16	29	20	30	30	23	33	-	-	-	-	-
1200	15	20	30	17	30	20	30	30	24	-	-	-	-	-	-
1250	15	20	30	18	31	20	30	30	22	-	-	-	-	-	-
1500	20	30	45	19	32	30	45	45	25	35	15	30	45	11	19
1600	20	30	45	20	33	30	45	45	26	-	-	-	-	-	-
2000	30	45	45	21	34	30	45	60	27	37	15	30	45	13	21
2500	30	45	45	23	36	30	45	60	28	38	15	30	45	14	22
3000	-	-	-	-	-	30	45	60	29	39	30	45	60	16	24
4000	-	-	-	-	-	-	-	-	-	-	30	45	60	17	25
5000	-	-	-	-	-	-	-	-	-	-	30	45	60	18	-

Units	HF3A	HF6	HF8A	
Max. dimension of primary bar conductor (diameter)	[mm x mm] [mm x mm] [mm]	2 // 10 x 80 3 // 10 x 50 65	3 // 10 x 100 2//55	2 // 10 x 120 3 // 10 x 100 81
Secondary terminals	[mm ²]	max. 6	max. 6	max. 6
I _{th} rms i 1 sec.	[kA]	120	>120	>120
Insert	-	741H0240	-	-
Clamp* (for bar mounting)	-	741C0256	741F0220	741F0220
Sealable cover	-	741C0221	741C0221	741C0221
Fittings for DIN-Rail	-	741C0243	741C0243	741C0243
Fittings for base plate	-	741H0230	741H0230	741H0230

* Accessories included with the transformers (number only for spare part ordering).

8. Survey chart – Accuracy class 0,2S – 0,2, type HF4B, HF5, HF6, HF7A and HF8A

	HF4B		HF5		HF7A		HF6		HF8A		
	Accuracy class	Rated secondary current [A]									
	0,2S	0,2	5	0,2S	0,2	5	0,2S	0,2	5	0,2S	0,2
HF4B											
											
HF5											
											
HF7A											
											
HF6											
											
HF8A											
											

	Units	HF4B	HF5	HF7A	HF6	HF8A
Max. dimension of primary bar Conductor	[mm x mm] [mm x mm] {mm}	10 x 40 28	12 x 60 39	2 // 10 x 80 3 // 10 x 50 65	3 // 10 x 100 2 // 55	2 // 10 x 120 3 // 10 x 100 81
Secondary terminals	mm ²	max. 6	max. 6	max. 6	max. 6	max. 6
I _{th} rms i 1 sec.	[kA]	60	100	120	>120	>120
Insert	-	741C0329	741C0329	741H0240	-	-
Clamp*	-	741C0256	741C0256	741C0256	741F0220	741F0220
Sealable cover	-	741C0221	741C0221	741C0221	741C0221	741C0221
Fittings for DIN-rail	-	741C0243	741C0243	741C0243	741C0243	741C0243
Fittings f base plate	-	741H0230	741H0230	741H0230	741H0230	741H0230

* Accessories included with the transformers (number only for spare part ordering).

9. Primary winding, at lower primary current



At low operating currents it may be required to use current transformers with rated primary currents less than 50 A if an ample instrument deflection shall be obtained. At rated primary currents of 100 A or less, the available output of a through-primary current transformer may be too low for a given application. The solution in both cases is a standard through-primary current transformer provided with a primary winding.

In principle any through-primary current transformer can be provided with a primary winding. Considering space and required labour it is, however, advantageous to use a through-primary current transformer with the lowest possible rated primary current. Consequently the optimum choice is e.g. current transformer type HF3A.

Ordinary insulated wire of sufficient current carrying capacity for the primary circuit is suitable for the primary winding. The number of primary turns is the number of times, the wire is taken through the transformer aperture.

Apart from changing the ratio of transformation, the primary winding has no influence on the data of the transformer. Output and rated secondary current remain unchanged.

The number of turns necessary depends on the ratio of the rated primary current of the transformer employed and the required primary current.

$$\text{No. of primary turns} = \frac{\text{Rated primary current}}{\text{Required primary current}} \quad (\text{Integer value})$$

The necessary number of primary turns, which shall be mounted on a HF3A to obtain a desired primary current, is tabulated below. When the required number of turns is found, it is possible to find the maximum cross section area of the primary winding through the table at the bottom of the page.


HF3A	[A]	Number of turns [the number of times, the wire is taken through the transformer aperture]									Accuracy class		
		0,5	1	3	Burden [VA]								
Rated primary current	50	10	5	-	-	2	-	1	-	-	1	2	
	60	12	6	4	3	-	2	-	-	-	1	2,5	
	75	15	-	5	-	3	-	-	1	-	1,5	3	
	80	16	8	-	4	-	-	-	-	-	2	3	
	100	20	10	-	5	4	-	2	-	1,5	3	5	
	125	25	-	-	-	5	-	-	-	2,5	3	5	
	150	30	15	10	-	6	5	3	2	2,5	5	5	
Required primary current	[A]	5	10	15	20	25	30	50	75				

Number of turns for type HF3A	Units	2	3	4	5	6	8	10	12	13	15	16	20	25	30
Maximum wire cross-section for solid or stranded conductors (1-7 stands)	[mm ²]	-	-	10	6	6	4	4	2,5	2,5	2,5	2,5	2,5	1,5	1
Maximum wire cross-section for flexible conductors (more than 7 stands)	[mm ²]	25	16	10	6	6	4	2,5	2,5	2,5	-	-	-	-	-

10. Mountings opportunity



1. Clamp, in resilient stainless steel,
for primary bar mounting:
Clamp is clipped on the transformer without using tools.

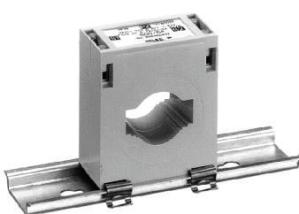

2. Clamp, in resilient stainless steel,
for mounting on DIN-rail:
The fitting is clipped without using tools.
Same fittings are used for HF4B, HF5, HF6, HF7A and HF8A.
Equivalent fittings are available for the types HF3A, HF3B.




3. Bush (tinned brass) for mounting between two bars or
between bar (device terminal) and cable lugs:
The bush is mounted without using tools by pressing it into the
aperture of the transformer.



4. Fitting, in resilient stainless steel,
for mounting on base plate
These fittings are easily mounted by pushing them into slots in
the enclosure of the transformer.
Same fittings are used for HF4B, HF5, HF6, HF7A and HF8A.
Equivalent fittings are available for the types HF3A, HF3B.




5. Clamp, in resilient stainless steel,
for primary bar mounting:
The clamp is clipped on the transformer without using tools.
Same fittings are used for HF4B, HF5 and HF7A.
Inserts for small primary bars for HF7A.
The insert (especially heat resistant plastic) are clipped without
using tools and it makes it possible to mount a single bar in the
large aperture of HF7A.

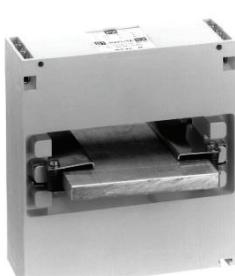


6. Clamp, in resilient stainless steel,
for primary bar mounting:
The characteristic of these fittings is that they have only to be
clamped to one of the parallel through bars.
This means that distance pieces and mounting of such
between the parallel bars can be avoided.
At the same time the fitting is vibration proof, i.a. because it
makes it possible for the bars to move freely.
Same fittings are used for HF6 and HF8A.

11. Accessories

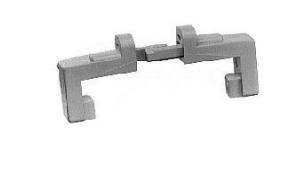For type:	Units	Article no.
	Clamp for bar mounting: HF3A and HF3B HF4B, HF5 and HF7A*	1 pc. per bag 1 pc. per bag
	Clamp for bar mounting: HF6 and HF8A *	2 pc. per bag = 1 set
	Fitting for mounting on base plate: HF3A and HF3B HF4B, HF5, HF6, HF7A and HF8A	12 pcs. per bag (2 pcs. pr. transformer) 12 pcs. per bag (4 pcs. pr. transformer)
	Fitting for DIN-rail mounting: HF3A and HF3B HF4B, HF5, HF7A and HF8A	2 pc. per bag = 1 set 2 pc. per bag = 1 set
	Bush for mounting between bar and cable lug: HF3A, for M10 screw HF3B, for M10 screw	1 pc. per bag 1 pc. per bag
	Insert: HF4B and HF5	741C0329
	Insert: HF7A *	741H0240
	Sealable cover for secondary terminals: HF3A and HF3B	12 pcs. per bag (4 pcs. pr. transformer)
	Sealable cover for secondary terminals: HF4B, HF5, HF6, HF7A and HF8A	12 pcs. per bag (4 pcs. pr. transformer)


* Accessories included with the transformers (numbers only for spare parts ordering)

12. Dimensions, type HF3A and HF3B

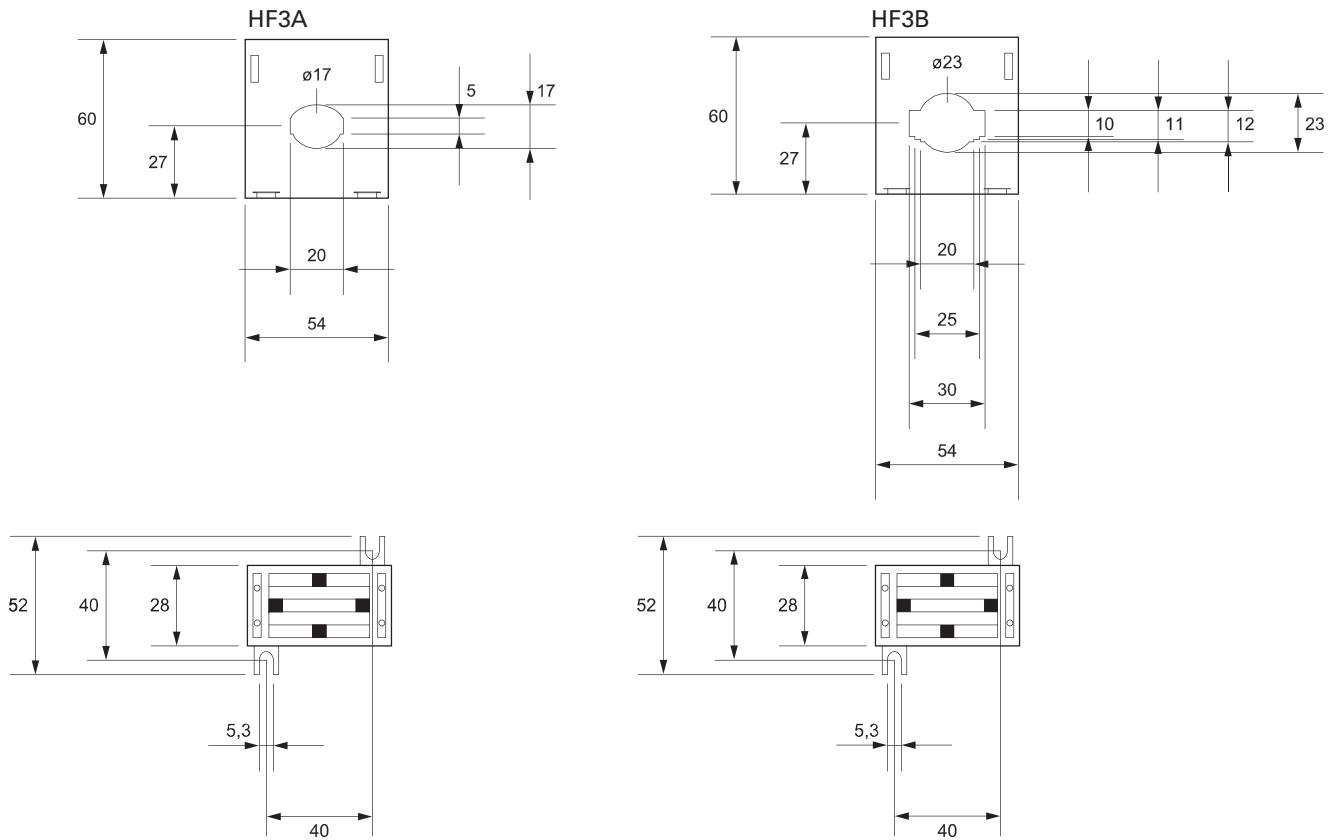





All dimensions in mm

13. Dimensions, type HF4B

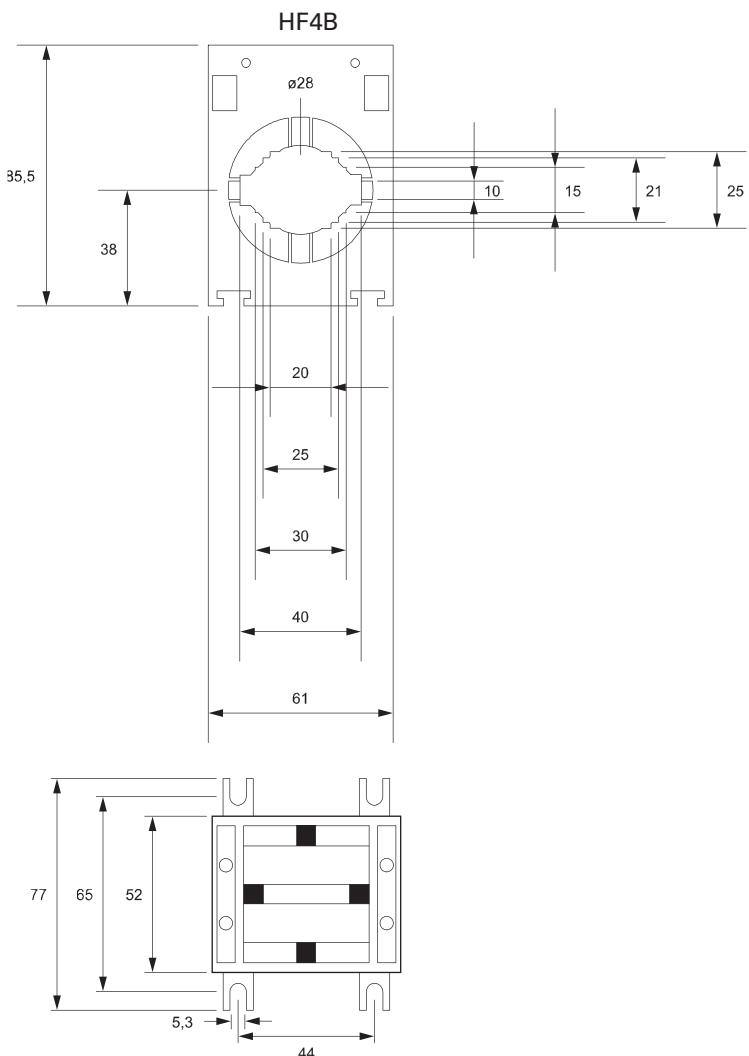





All dimensions in mm

14. Dimensions, type HF5 and HF7A

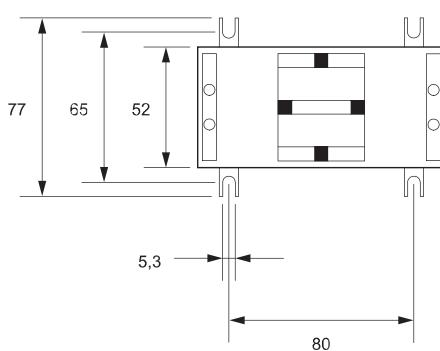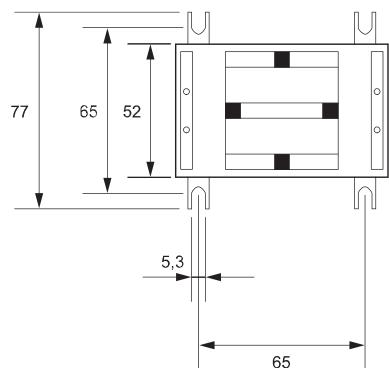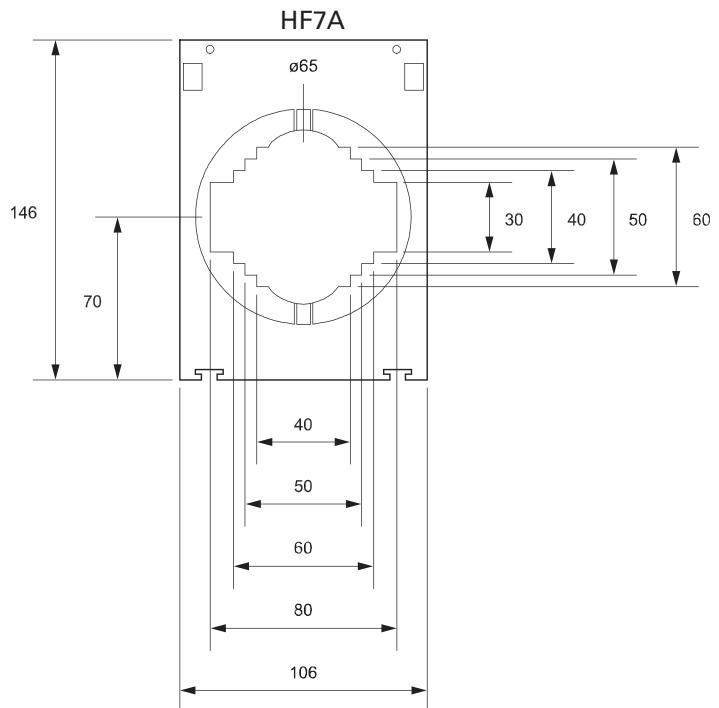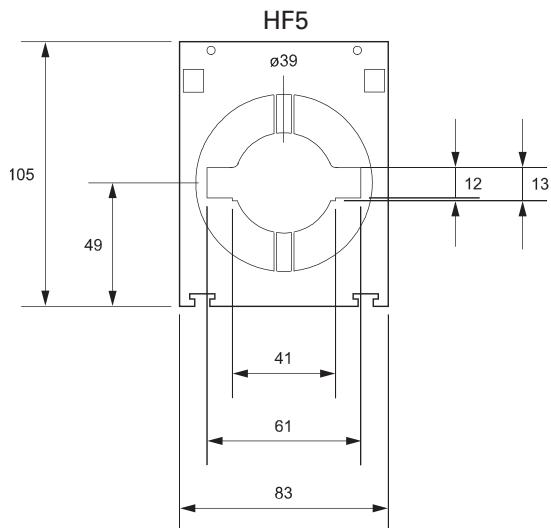

All dimensions in mm

15. Dimensions, type HF6 and HF8A

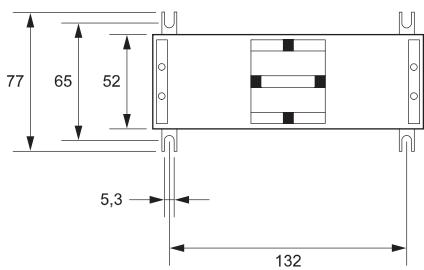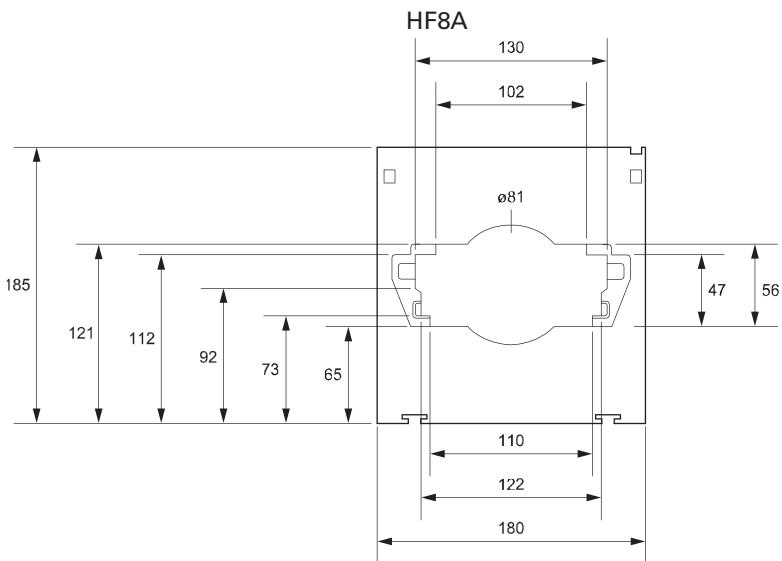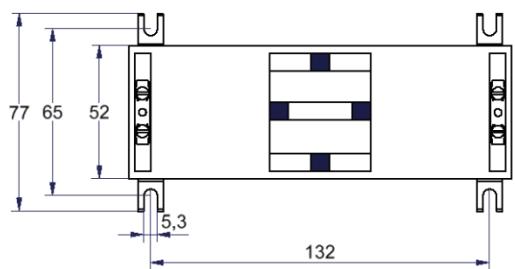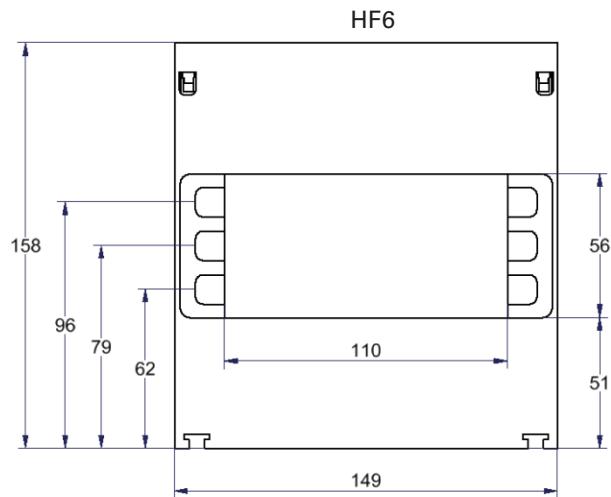

All dimensions in mm

16. Overview over item numbers

	Nr.	EAN Nr.	Type	Page
741B00--	741B0004	5703498700012	HF3B, 100/5	Page 6
	741B0005	5703498700029	HF3B, 150/5	Page 6
	741B0006	5703498700036	HF3B, 100/1	Page 6
	741B0007	5703498700043	HF3B, 150/1	Page 6
	741B0008	5703498700050	HF3A, 30/1	Page 6
	741B0011	5703498700067	HF3A, 50/5	Page 6
	741B0012	5703498700074	HF3A, 75/5	Page 6
	741B0013	5703498700081	HF3A, 60/5	Page 6
	741B0014	5703498700098	HF3A, 100/5	Page 6
	741B0016	5703498700104	HF3A, 150/5	Page 6
	741B0017	5703498700111	HF3A, 200/5	Page 6
	741B0018	5703498700128	HF3B, 200/5	Page 6
	741B0019	5703498700135	HF3B, 250/5	Page 6
	741B0020	5703498700142	HF3B, 300/5	Page 6
	741B0021	5703498700159	HF3A, 60/1	Page 6
	741B0022	5703498700166	HF3B, 400/5	Page 6
	741B0023	5703498700173	HF3B, 125/1	Page 6
	741B0024	5703498700180	HF3B, 500/5	Page 6
	741B0025	5703498700197	HF3A, 125/5	Page 6
	741B0026	5703498700203	HF3B, 600/5	Page 6
	741B0027	5703498700210	HF3A, 250/5	Page 6
	741B0028	5703498700227	HF3A, 250/1	Page 6
	741B0029	5703498700234	HF3B, 250/1	Page 6
	741B0030	5703498700241	Clamp for HF3A and HF3B	Page 12
	741B0031	5703498700258	HF3A, 50/1	Page 6
	741B0032	5703498700265	HF3A, 75/1	Page 6
	741B0033	5703498700272	HF3A, 100/1	Page 6
	741B0034	5703498700289	HF3A, 150/1	Page 6
	741B0035	5703498700296	HF3A, 200/1	Page 6
	741B0036	5703498700302	HF3B, 200/1	Page 6
	741B0037	5703498700319	HF3B, 300/1	Page 6
	741B0038	5703498700326	HF3B, 400/1	Page 6
	741B0039	5703498700333	HF3B, 500/1	Page 6
	741B0040	5703498700357	HF3B, 600/1	Page 6
	741B0087	5703498700562	HF3A, 80/5 A	Page 6
	741B0088	5703498700579	HF3A, 80/1 A	Page 6
	741B0089	5703498700586	HF3A, 125/1 A	Page 6
	741B0097	5703498700593	HF3B, 125/5 A	Page 6
741B02--	741B0230	5703498700609	Fittings for mounting on base plate HF3A and HF3B	Page 12
	741B0231	5703498700623	Fittings for DIN-rail mounting HF3A and HF3B	Page 12
	741B0232	5703498700630	Sealable covers for HF3A and HF3B	Page 12

T-Line, current transformers

	Nr.	EAN Nr.	Type	Page
741B03--	741B0321	5703498700647	Bush for HF3A	Page 12
	741B0322	5703498700654	Bush for HF3B	Page 12
741C02--	741C0221	5703498702900	Sealable cover HF4B, HF5, HF6, HF7A and HF8A	Page 12
	741C0243	5703498702825	Fittings for DIN-rail HF4B, HF5, HF6, HF7A and HF8A	Page 12
	741C0256	5703498700777	Clamp for bar mounting for HF4B, HF5 and HF7A	Page 12
741C03--	741C0329	5703498700784	Insert for HF4B and HF5	Page 12
741C20--	741C2054	5703498700999	HF4B, 50/1	Page 7
	741C2055	5703498701019	HF4B, 60/1	Page 7
	741C2056	5703498701033	HF4B, 75/1	Page 7
	741C2057	5703498701040	HF4B, 50/5	Page 7
	741C2058	5703498701064	HF4B, 60/5	Page 7
	741C2059	5703498701071	HF4B, 75/5	Page 7
	741C2060	5703498701088	HF4B, 100/5	Page 7
	741C2061	5703498701101	HF4B, 150/5	Page 7
	741C2062	5703498701125	HF4B, 200/5	Page 7
	741C2063	5703498701149	HF4B, 250/5	Page 7
	741C2064	5703498701163	HF4B, 300/5	Page 7
	741C2065	5703498701187	HF4B, 400/5	Page 7
	741C2066	5703498701200	HF4B, 500/5	Page 7
	741C2067	5703498701224	HF4B, 600/5	Page 7
	741C2068	5703498701248	HF4B, 100/1	Page 7
	741C2069	5703498701262	HF4B, 150/1	Page 7
	741C2070	5703498701286	HF4B, 200/1	Page 7
	741C2071	5703498701309	HF4B, 250/1	Page 7
	741C2072	5703498701323	HF4B, 300/1	Page 7
	741C2073	5703498701347	HF4B, 400/1	Page 7
	741C2074	5703498701361	HF4B, 500/1	Page 7
	741C2075	5703498701385	HF4B, 600/1	Page 7
741C20--	741C2078	5703498702702	HF4B, 100/5, Class 0.2S	Page 9
	741C2079	5703498702764	HF4B, 150/5, Class 0.2S	Page 9
	741C2080	5703498702771	HF4B, 200/5, Class 0.2S	Page 9
	741C2081	5703498702788	HF4B, 250/5, Class 0.2S	Page 9
741C20--	741C2082	5703498701408	HF4B, 200/5, Class 0.2	Page 9
	741C2084	5703498701422	HF4B, 250/5, Class 0.2	Page 9
	741C2086	5703498701446	HF4B, 300/5, Class 0.2S	Page 9
	741C2088	5703498701460	HF4B, 400/5, Class 0.2S	Page 9
	741C2090	5703498701484	HF4B, 500/5, Class 0.2S	Page 9
	741C2092	5703498701507	HF4B, 600/5, Class 0.2S	Page 9
741E00--	741E0011	5703498702719	HF5, 300/5	Page 7
	741E0017	5703498702627	HF5, 1500/1	Page 7
	741E0018	5703498702634	HF5, 1600/1	Page 7
	741E0021	5703498701521	HF5, 400/5	Page 7
	741E0022	5703498701538	HF5, 500/5	Page 7
	741E0023	5703498701552	HF5, 600/5	Page 7
	741E0024	5703498701569	HF5, 800/5	Page 7
	741E0025	5703498701576	HF5, 1000/5	Page 7
	741E0026	5703498701590	HF5, 1200/5	Page 7
	741E0027	5703498701606	HF5, 1500/5	Page 7
	741E0028	5703498701613	HF5, 400/1	Page 7
	741E0029	5703498701620	HF5, 500/1	Page 7
	741E0030	5703498701637	HF5, 600/1	Page 7
	741E0031	5703498701644	HF5, 800/1	Page 7
	741E0032	5703498701651	HF5, 1000/1	Page 7
	741E0033	5703498701668	HF5, 1200/1	Page 7
	741E0034	5703498701675	HF5, 750/5	Page 7

Nr.	EAN Nr.	Type	Page
741E0035	5703498701682	HF5, 750/1	Page 7
741E0037	5703498701699	HF5, 1250/5	Page 7
741E0038	5703498701705	HF5, 1250/1	Page 7
741E0039	5703498701712	HF5, 1600/5	Page 7
741E0040	5703498701729	HF5, 400/5, Class 0.2S	Page 9
741E0042	5703498701736	HF5, 500/5, Class 0.2S	Page 9
741E0044	5703498701743	HF5, 600/5, Class 0.2S	Page 9
741E0046	5703498701750	HF5, 750/5, Class 0.2S	Page 9
741E0048	5703498701767	HF5, 800/5, Class 0.2S	Page 9
741E0050	5703498701774	HF5, 1000/5, Class 0.2S	Page 9
741E0052	5703498701781	HF5, 1200/5, Class 0.2S	Page 9
741E0054	5703498701798	HF5, 1250/5, Class 0.2S	Page 9
741E0056	5703498701804	HF5, 1500/5, Class 0.2S	Page 9
741E0058	5703498702726	HF5, 1600/5, Class 0.2S	Page 9
741E0060	5703498702689	HF5, 300/5, Class 0.2S	Page 9
741F00--	741F0022	HF6, 1250/5	Page 8
	741F0023	HF6, 1000/5	Page 8
	741F0024	HF6, 1200/5	Page 8
	741F0025	HF6, 1500/5	Page 8
	741F0026	HF6, 1600/5	Page 8
	741F0027	HF6, 2000/5	Page 8
	741F0028	HF6, 2500/5	Page 8
	741F0029	HF6, 3000/5	Page 8
	741F0033	HF6, 1000/1	Page 8
	741F0035	HF6, 1500/1	Page 8
	741F0037	HF6, 2000/1	Page 8
	741F0038	HF6, 2500/1	Page 8
	741F0039	HF6, 3000/1	Page 8
	741F0050	HF6, 1000/5, Class 0.2S	Page 9
	741F0052	HF6, 1200/5, Class 0.2S	Page 9
	741F0054	HF6, 1250/5, Class 0.2S	Page 9
	741F0056	HF6, 1500/5, Class 0.2S	Page 9
	741F0058	HF6, 1600/5, Class 0.2S	Page 9
	741F0060	HF6, 2000/5, Class 0.2S	Page 9
	741F0062	HF6, 2400/5, Class 0.2S	Page 9
	741F0064	HF6, 2500/5, Class 0.2S	Page 9
	741F0066	HF6, 3000/5, Class 0.2S	Page 9
	741F0220	Clamp for bar mounting for HF6 and HF8A	Page 12
741H00--	741H0011	HF7A, 400/5	Page 8
	741H0012	HF7A, 500/5	Page 8
	741H0013	HF7A, 600/5	Page 8
	741H0014	HF7A, 750/5	Page 8
	741H0015	HF7A, 800/5	Page 8
	741H0016	HF7A, 1000/5	Page 8
	741H0017	HF7A, 1200/5	Page 8
	741H0018	HF7A, 1250/5	Page 8
	741H0019	HF7A, 1500/5	Page 8
	741H0020	HF7A, 1600/5	Page 8
	741H0021	HF7A, 2000/5	Page 8
	741H0023	HF7A, 2500/5	Page 8
	741H0024	HF7A, 400/1	Page 8
	741H0025	HF7A, 500/1	Page 8
	741H0026	HF7A, 600/1	Page 8
	741H0027	HF7A, 750/1	Page 8

T-Line, current transformers

Nr.	EAN Nr.	Type	Page
741H0028	5703498702207	HF7A, 800/1	Page 8
741H0029	5703498702214	HF7A, 1000/1	Page 8
741H0030	5703498702221	HF7A, 1200/1	Page 8
741H0031	5703498702238	HF7A, 1250/1	Page 8
741H0032	5703498702245	HF7A, 1500/1	Page 8
741H0033	5703498702252	HF7A, 1600/1	Page 8
741H0034	5703498702269	HF7A, 2000/1	Page 8
741H0036	5703498702283	HF7A, 2500/1	Page 8
741H0050	5703498702290	HF7A, 750/5, Class 0.2S	Page 9
741H0052	5703498702306	HF7A, 800/5, Class 0.2S	Page 9
741H0054	5703498702313	HF7A, 1000/5, Class 0.2S	Page 9
741H0056	5703498702320	HF7A, 1200/5, Class 0.2S	Page 9
741H0058	5703498702337	HF7A, 1250/5, Class 0.2S	Page 9
741H0060	5703498702344	HF7A, 1500/5, Class 0.2S	Page 9
741H0062	5703498702351	HF7A, 1600/5, Class 0.2S	Page 9
741H0064	5703498702368	HF7A, 2000/5, Class 0.2S	Page 9
741H0066	5703498702375	HF7A, 2400/5, Class 0.2S	Page 9
741H0068	5703498702382	HF7A, 2500/5, Class 0.2S	Page 9
741H0230	5703498702399	Fittings for mount. on base plate HF4B, HF5, HF6, HF7A and HF8A	Page 12
741H0240	5703498702412	Insert for HF7A	Page 12
741K00--			
741K0011	5703498702429	HF8A, 1500/5	Page 8
741K0013	5703498702436	HF8A, 2000/5	Page 8
741K0014	5703498702443	HF8A, 2500/5	Page 8
741K0016	5703498702450	HF8A, 3000/5	Page 8
741K0017	5703498702467	HF8A, 4000/5	Page 8
741K0018	5703498702474	HF8A, 5000/5	Page 8
741K0019	5703498702481	HF8A, 1500/1	Page 8
741K0021	5703498702498	HF8A, 2000/1	Page 8
741K0022	5703498702504	HF8A, 2500/1	Page 8
741K0024	5703498702511	HF8A, 3000/1	Page 8
741K0025	5703498702528	HF8A, 4000/1	Page 8
741K0031	5703498702535	HF8A, 1500/5, Class 0.2S	Page 9
741K0033	5703498702542	HF8A, 2000/5, Class 0.2S	Page 9
741K0034	5703498702559	HF8A, 2500/5, Class 0.2S	Page 9
741K0036	5703498702566	HF8A, 3000/5, Class 0.2S	Page 9
741K0037	5703498702573	HF8A, 4000/5, Class 0.2S	Page 9
741K0038	5703498702580	HF8A, 5000/5, Class 0.2S	Page 9

Eaton
Industries (Austria) GmbH
Eugenia 1
3943 Schrems, Austria

Eaton
EMEA Headquarters
Route de la Longerai 7
1110 Morges, Switzerland
www.eaton.eu

© 2018 Eaton
All Rights Reserved
Printed in XXX
Publication No. **CA00000000** / CSSC - 886
Article No. XXXXXX
March 2018

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Follow us on social media to get the latest product and support information.

