


NSYTRV62BL

SCREW TERMINAL, FEED THROUGH, 2 POINTS, 6MM² , BLUE

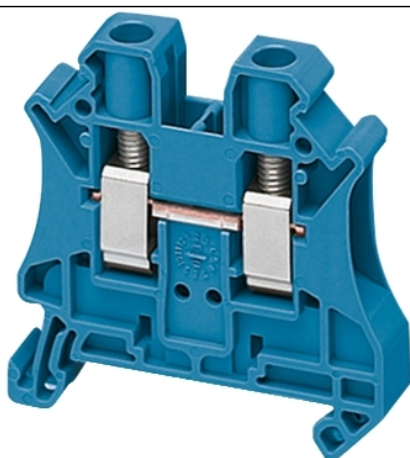

Main

Range	Lineryg
Product name	Lineryg TR
Product or component type	Terminal block
Device short name	TRV
Accessory / separate part category	Connection accessory
Terminal block type	Passthrough
Terminal block level	1
Mounting mode	Clip-on
Nominal cross section	6 mm ²
Length	47,7 mm
Colour	Blue
Quantity per set	Set of 50

Complementary

Width	8,2 mm
Height	47,5 mm
Connections - terminals	1 x screw terminal upstream M4) 1 x screw terminal downstream M4)
Number of connections	2
Connection position	Sideways
Number of measurement input	2
Cable cross section	0,2...10 Mm ² , solid with cable end 0,2...6 Mm ² , flexible with cable end 0,2...10 Mm ² , solid without cable end 0,2...10 mm ² , flexible without cable end
Tightening torque	1,5...1,8 N.m
Wire stripping length	10 mm
Tool type	Connection screwdriver Disconnection screwdriver
[Ue] rated operational voltage	1000 V EN/IEC 60947-7-1 600 V CSA 690 V ATEX Exe II Ex II 2 GD 600 V cURus
[In] rated current	41 A EN/IEC 60947-7-1 50 A cURus 50 A CSA 40 A ATEX Exe II Ex II 2 GD
Material	Polyamide 6/6 insulating case Copper alloy connector and screw Copper alloy commoning link Chromium-nickel steel spring
Dielectric loss	0,01 at 1 MHz IEC 60250 0,01 at 1 MHz VDE 0303-T4
Dielectric constant	3,7 at 1 MHz
Resistivity	10000 MΩ.M IEC 60093 10000 MΩ.m VDE 0303-T30
Surface resistance	1000 GΩ IEC 60093 1000 GΩ VDE 0303-T30
Creep resistance	500 CTI (> 400 kB) IEC 60093 500 CTI (> 400 kB) VDE 0303-T30

Flame retardance	V0 0,8 mm UL 94
Net weight	13,95 g
Range compatibility	Prisma G Prisma P Prisma PH Prisma Pack Spacial Kaedra Pragma TeSys
Product compatibility	Spacial enclosures

Environment

Product certifications	VDE EAC GL IEC-Ex LR DNV CSA ATEX cURus
Dielectric strength	1000 V IEC 60243-1
Ambient air temperature for operation	-40...130 °C IEC 60216-1 -40...130 °C VDE 0304-T21

Pakke osad

Pakendi tüüp 1	Db
Ühikute arv pakendis 1	1
Package 1 Height	5,5 cm
Pakendi laius 1	10,0 cm
Pakendi pikkus 1	26,0 cm
Pakendi kaal 1	13,0 g
Pakendi tüüp 2	Gyári csomagolás
Ühikute arv pakendis 2	50
Pakendi kõrgus 2	5,5 cm
Pakendi laius 2	10,0 cm
Pakendi pikkus 2	26,0 cm
Pakendi kaal 2	718,0 g
Pakendi tüüp 3	Doboz
Ühikute arv pakendis 3	750
Pakendi kõrgus 3	30,0 cm
Pakendi laius 3	30,0 cm
Pakendi pikkus 3	40,0 cm
Pakendi kaal 3	11,277 kg

Offer Sustainability

Jätkusuutliku pakkumise olek	Green Premium toode
REACH-määrus	REACH-deklaratsioon
ELi RoHS direktiiv	Vastavus ELi RoHS Deklaratsioon
Elavhõbedavaba	Jah
Hiina EoHS regulatsioon	Hiina RoHS Deklaratsioon
RoHS eranditeave	Jah
Keskkonnaalane avaldus	Toote Keskkonnaprofiil
WEEE	Tootest tuleb Euroopa Liidu turgul vabaneda vastavuses erijäätmeseadustele ning see ei tohi sattuda olmeprügi sekka.
Halogeensisu	Halogeenivabade plastosadega toode

Contractual warranty

Garantii	18 months
----------	-----------
