


NSYTRV162PE

SCREW TERMINAL, PROTECTIVE EARTH, 2 POINTS, 16MM², GREEN-YELLOW

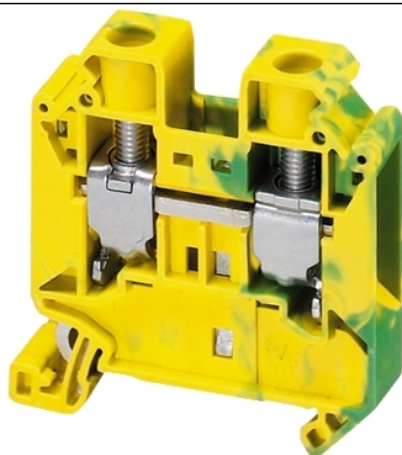

Main

Range	Lineryg
Product name	Lineryg TR
Product or component type	Terminal block
Device short name	TRV
Terminal block type	Protective earth
Terminal block level	1
Mounting mode	Clip-on
Nominal cross section	16 mm ²
Length	55,5 mm
Colour	Green-yellow
Quantity per set	Set of 50

Complementary

Width	12,2 mm
Height	55 mm
Connections - terminals	1 x screw terminal upstream 1 x screw terminal downstream
Number of connections	2
Connection position	Sideways
Number of measurement input	2
Cable cross section	1,5...25 Mm ² , solid 1...16 Mm ² , flexible with cable end 1,5...25 mm ² , flexible without cable end
Tightening torque	2,5...3 N.m
Wire stripping length	14 mm
Tool type	Connection screwdriver Disconnection screwdriver
[In] rated current	101 A EN/IEC 60947-7-1
Material	Polyamide 6/6 insulating case
Dielectric loss	0,01 at 1 MHz IEC 60250 0,01 at 1 MHz VDE 0303-T4
Dielectric constant	3,7 at 1 MHz
Resistivity	10000 MΩ.M IEC 60093 10000 MΩ.m VDE 0303-T30
Surface resistance	1000 GΩ IEC 60093 1000 GΩ VDE 0303-T30
Creep resistance	500 CTI (> 400 kV) IEC 60093 500 CTI (> 400 kV) VDE 0303-T30
Flame retardance	V0 0,8 mm UL 94
Net weight	46,85 g
Range compatibility	Prisma G Prisma P Prisma PH Prisma Pack Spacial Kaedra Pragma TeSys
Product compatibility	Spacial enclosures

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environment

Product certifications	ATEX GL DNV VDE CURus LR IEC-Ex EAC CSA
Dielectric strength	1000 V IEC 60243-1
Ambient air temperature for operation	-40...130 °C IEC 60216-1 -40...130 °C VDE 0304-T21

Pakke osad

Pakendi tüüp 1	Db
Ühikute arv pakendis 1	1
Package 1 Height	9,300 cm
Pakendi laius 1	11,000 cm
Pakendi pikkus 1	36,500 cm
Pakendi kaal 1	47,000 g
Pakendi tüüp 2	Gyári csomagolás
Ühikute arv pakendis 2	50
Pakendi kõrgus 2	9,300 cm
Pakendi laius 2	11,000 cm
Pakendi pikkus 2	36,500 cm
Pakendi kaal 2	2,396 kg
Pakendi tüüp 3	Doboz
Ühikute arv pakendis 3	200
Pakendi kõrgus 3	30,000 cm
Pakendi laius 3	30,000 cm
Pakendi pikkus 3	40,000 cm
Pakendi kaal 3	10,150 kg

Offer Sustainability

Jätkusuutliku pakkumise olek	Green Premium toode
REACH-määrus	REACH-deklaratsioon
Ilma SVHC REACH-ta	Jah
ELi RoHS direktiiv	Vastavus ELi RoHS Deklaratsioon
Mürgiste raskemetallideta	Jah
Elavhõbedavaba	Jah
Hiiina EoHS regulatsioon	Hiina RoHS Deklaratsioon
RoHS eranditeave	Jah
Keskkonnavalade avaldus	Toote Keskkonnaprofiil
WEEE	Tootest tuleb Euroopa Liidu turgudel vabaneda vastavuses erijäätmeseadustele ning see ei tohi sattuda olmeprügi sekka.
Halogeensisu	Halogeenivabade plastosadega toode

Contractual warranty

Garantii	18 months
----------	-----------