


PROFIT-HF ML C-PRo 4G1,5

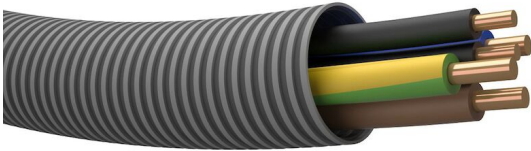

APPLICATION

Profit is a pre-wired tube with installation wire. This product is designed for residential construction and is used in both new construction and renovation projects. The halogen-free, flexible tube has a mechanical strength of 750 N and is resistant to a falling weight of up to 2 kg. The installation wire is easy to strip, which makes it easy to use. The installer needs to carry out less actions thanks to the combination of tube and wire, which saves a lot of time and costs.

CERTIFICATIONS AND DESIGN STANDARDS



EN IEC 61386-22
EN 61034-2
IEC 60754

Conduit Systems for cable management
Measurement of smoke density of cables
Corrosive gases

Reaction-to-fire class (acc. EN 13501-6)
Smoke development class (acc. EN 13501-6)
Euro class flaming droplets/particles (acc. EN 13501-6)
Euro class acidity (acc. EN 13501-6)

Cca
s1
d1
a1

PRODUCT PROPERTIES

Conductor category	Class 1 = solid
Shape of conductor	
Nominal cross section conductor [mm²]	1.5
Number of cores	4
With protective conductor	Yes
Colour outer sheath	
Nominal outer diameter [mm]	16
Current carrying capacity [A]	14
Conductor resistance at 20° C [Ohm/km]	12.1
Cable weight [kg/km]	140
Min. bending radius during installation [mm]	
DOP number	1011500

Current rating: installation method A (e.g. in conduit inside wall)

Item name	EAN-code (GTIN)	Packaging type	Standard packaging quantity
PROFIT-HF ML C-PRo 4G1,5	4741532020420		100