




### BE-8510SL - BE-8520SL

#### **ERGO™ Slim VDE Insulated Plus-Minus/Phillips-Tip Screwdrivers with 3-Component Handle for 5.0/PH1 - 6.0/PH2**



#### PRODUCT DETAILS

- Screwdriver developed according to the scientific ERGO™ process
- ERGO™ insulated VDE screwdriver with slim blades (reduced blade diameter) for plus-minus/Phillips terminal screws
- For work on live equipment, up to 1000 V, high quality blade insulation moulded directly onto the blade
- For use in electric racks and terminal blocks
- Black oxide tip for higher accuracy
- Three-component handle for maximum user comfort, soft material with ridged surface provides superior grip and greater force transmission
- Maximum comfort with minimum effort thanks to an ergonomic design
- Easy to choose the right tip with the colour-coded handle and permanent symbol on the domed end
- Flat face to prevent it from rolling away
- Integrated hanging hole
- High performance alloy steel blade
- Blades are 30% slimmer than regular insulated blades for better accessibility
- Individually inspected and manufactured according to IEC 60900, tested in a water bath at 10000 V

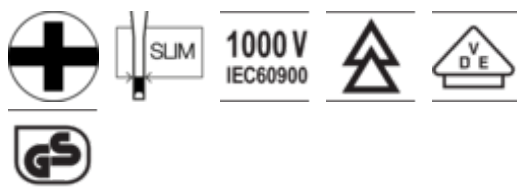

**Follow the Fish!**



PRODUCT ATTRIBUTES

| Product   |  |  |  |  |  |  |
|-----------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| BE-8510SL | 5.0/PH1                                                                           | 80 mm                                                                             | 20 mm                                                                             | 122 mm                                                                              | 202 mm                                                                              | 43 g                                                                                |
| BE-8520SL | 6.0/PH2                                                                           | 100 mm                                                                            | 27 mm                                                                             | 122 mm                                                                              | 222 mm                                                                              | 74 g                                                                                |

