




Linear opal cover fitting

MODUS H LED1200mm, 1x LED , opal cover, pendant, direct, LED cold white, 700mA not dimable

Code: HL1MKO4V1/700ND

EAN: 8595073791952

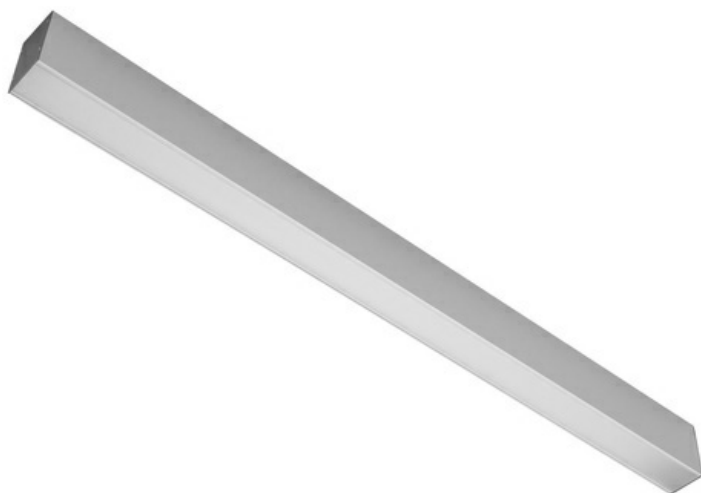

Vlastnosti svítidla

Product category:	Pendant luminaire	Degree of protection (IP):	IP20
Color housing:	Aluminium	Material housing:	Aluminium
Suitable for light line configuration:	No	Suspension supplied with the product:	Yes
Made in Czech republic:	Yes		

Světelný zdroj

Lamp type:	LED not exchangeable	Effective luminous flux (lm):	3000
System power (W):	34	Luminaire efficacy (lm/W):	88
Color temperature (K):	4000	Color rendering index CRI:	80-89
Rated life time L80/B50 (h):	80000	With lamp:	Yes
Colour of light:	White		
Energy efficiency class of the built-in lamp:	A++, A+, A (LED)		

Optický systém

Optical system:	KO	Light outlet:	Direct
Light sharing:	Symmetric	Material cover:	Plastic, opal

Rozměry

Length (mm):	1185	Width (mm):	66
Height/depth (mm):	100	Pendant length (mm):	150...2000
Size version:	M	Weight (kg):	3,7

Elektrické vlastnosti

Protection class:	I	Voltage type:	AC
Type of control gear:	LED operating device current-controlled	Nominal voltage (V):	220...240
Control gear included:	Yes	Type of wiring:	Suitable for through wiring
No dim function:	Yes		