


Busbars BBU, BBP and BBUE

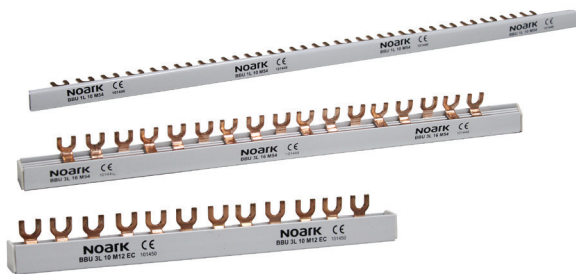


- Busbars BBU, BBP and BBUE for connection of installation devices
- 1, 2, 3 and 4-pole versions
- 10 mm² for 63 A, 16 mm² for 80 A and 35 mm² for 125 A circuits
- 1 meter long or shortened versions
- Fork and pin type connection points
- 9, 13.5, 18 or 27 mm connection point step
- Tailored versions for specific combinations of Noark devices

Busbars for simple and reliable interconnection of installation devices.

Some versions are equipped with end caps. There are available separately packed end caps for all types of busbars.

Type Key

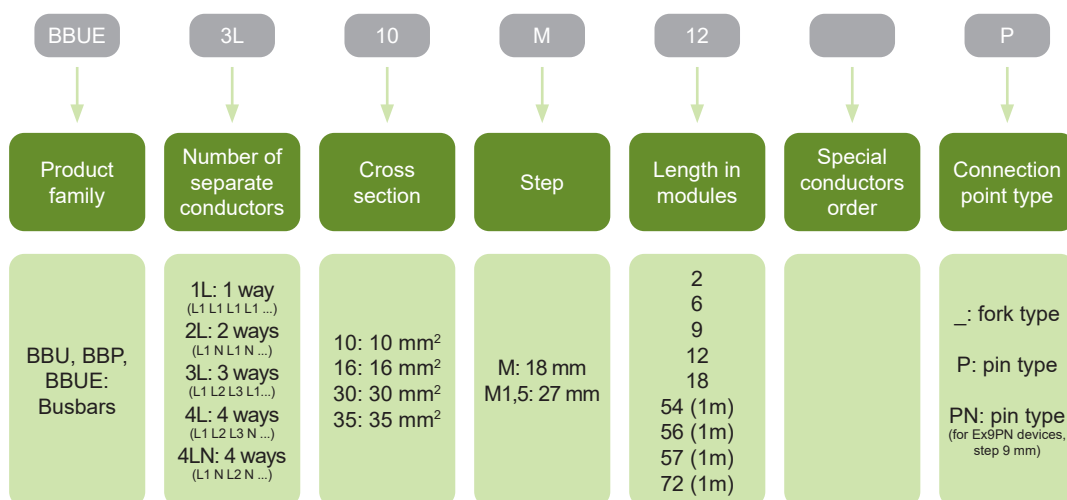

Certification mark



Busbars BBU

1 meter BBU busbars


- 1 and 3-phase busbars
- With 54 fork type connection points
- 10 mm² for rated current up to 63 A
16 mm² for rated current up to 80 A
- Delivered without end caps



Number of phases	Length MU	Cross section	Article No.	Type	Packing
1	54 MU	10 mm ²	101446	BBU 1L 10 M54	1/100
1	54 MU	16 mm ²	101447	BBU 1L 16 M54	1/100
3	54 MU	10 mm ²	101448	BBU 3L 10 M54	1/50
3	54 MU	16 mm ²	101449	BBU 3L 16 M54	1/50

Shortened BBU busbars

- 3-phase busbars
- 10 mm² for rated current up to 63 A
16 mm² for rated current up to 80 A
- Delivered with end caps



Number of phases	Length MU	Cross section	Article No.	Type	Packing
3	12 MU	10 mm ²	101450	BBU 3L 10 M12 EC	1/10/200
3	12 MU	16 mm ²	101451	BBU 3L 16 M12 EC	1/10/200
3	6 MU	10 mm ²	110830	BBU 3L 10 M6 EU	1/5/400
3	6 MU	16 mm ²	110832	BBU 3L 16 M6 EU	1/5/400
3	9 MU	10 mm ²	110831	BBU 3L 10 M9 EU	1/5/250
3	9 MU	16 mm ²	110833	BBU 3L 16 M9 EU	1/5/250

Busbars BBP

1 meter pin type busbars

- 1 and 3-phase busbars
- With 54 pin type connection points
- 10 mm² for rated current up to 63 A
- Delivered without end caps



Number of phases	Length MU	Cross section	Article No.	Type	Packing
1	54 MU	10 mm ²	113240	BBP 1L 10 M54 EU	1/5/50
3	54 MU	10 mm ²	113241	BBP 3L 10 M54 EU	1/5/20

Pin type shortened busbars

- 1 and 3-phase busbars
- With 54 pin type connection points
- 10 mm² for rated current up to 63 A
- Delivered without end caps




Number of phases	Length MU	Cross section	Article No.	Type	Packing
1	12	10 mm ²	113242	BBP 1L 10 M12 EU	1/10/500
3	12	10 mm ²	113243	BBP 3L 10 M12 EU	1/5/180

Busbars BBUE

1 meter fork type busbars

- 1, 2, 3 and 4-phase versions
- Length 1 meter (can be shortened)
- Step between connection points 18 mm
- Fork type connection points
- 10 mm² for 63 A or 16 mm² for 80 A rated current
- Delivered without end caps



Number of phases	Length MU	Cross section	Article No.	Type	Packing
1P	56 (1m)	10 mm ²	103798	BBUE 1L 10 M56	1/10
1P	56 (1m)	16 mm ²	103804	BBUE 1L 16 M56	1/10
2P	56 (1m)	10 mm ²	103864	BBUE 2L 10 M56	1/10
2P	56 (1m)	16 mm ²	103865	BBUE 2L 16 M56	1/10
3P	57 (1m)	10 mm ²	103808	BBUE 3L 10 M57	1/10
3P	57 (1m)	16 mm ²	103812	BBUE 3L 16 M57	1/10
4P	56 (1m)	10 mm ²	103816	BBUE 4L 10 M56	1/10
4P	56 (1m)	16 mm ²	103817	BBUE 4L 16 M56	1/10

Shortened fork type busbars

- 1 and 3-phase versions
- 10 mm² for 63 A or 16 mm² for 80 A rated current
- Step between connection points 18 mm
- Fork type connection points
- Delivered without end caps




Number of phases	Length MU	Cross section	Article No.	Type	Packing
1	2	10 mm ²	103799	BBUE 1L 10 M2	1/25
1	6	10 mm ²	103800	BBUE 1L 10 M6	1/25
1	9	10 mm ²	103801	BBUE 1L 10 M9	1/25
1	12	10 mm ²	103802	BBUE 1L 10 M12	1/25
1	12	16 mm ²	103805	BBUE 1L 16 M12	1/25
1	18	10 mm ²	103803	BBUE 1L 10 M18	1/25
1	18	16 mm ²	103806	BBUE 1L 16 M18	1/25
3	9	10 mm ²	103809	BBUE 3L 10 M9	1/25
3	9	16 mm ²	103813	BBUE 3L 16 M9	1/25
3	12	10 mm ²	103810	BBUE 3L 10 M12	1/25
3	12	16 mm ²	103814	BBUE 3L 16 M12	1/25
3	18	10 mm ²	103811	BBUE 3L 10 M18	1/25
3	18	16 mm ²	103815	BBUE 3L 16 M18	1/25

Busbars BBP and BBUE

1 meter special type busbars


- Suitable for 3/4MU Ex9B40J line MCBs
- 10 mm² for rated current up to 63 A
- Step between connection points 13,5 mm
- Pin type connection points
- Delivered without end caps
- For 72 slim MCBs in line



Number of phases	Length 3/4MU	Cross section	Article No.	Type	Packing
1	72	10 mm ²	113236	BBP 1L 10 M72 13.5mm EU	1/10/50
3	72	10 mm ²	113237	BBP 3L 10 M72 13.5mm EU	1/5/20


Special type shortened busbars

- 2-phase busbar - configuration N L1 N L1 N L1...
- 4-phase busbar - configuration N L1 N L2 N L3 N L1 ...
- Suitable for 1MU 1P+N-pole MCBs line Ex9PN and 1M RCBO Ex9NLE
- 10 mm² for rated current up to 63 A
- Step between connection points 8.7 mm
- Pin type connection points
- Delivered with end caps
- Busbar is designed for connecting devices from the top side, the order of the devices is quoted from left




Number of phases	Length MU	Cross section	Article No.	Type	Packing
2	12	10 mm ²	111407	BBP 2LN 10 M12 EU	1/5/150
4	12	10 mm ²	111408	BBP 4LN 10 M12 EU	1/5/100

- Suitable for 3/4MU MCBs line Ex9B40J
- 10 mm² for rated current up to 63 A
- Step between connection points 13.5 mm
- Pin type connection points
- Delivered with end caps
- For 12 MCBs in line



Number of phases	Length 3/4MU	Cross section	Article No.	Type	Packing
1	12	10 mm ²	111405	BBP 1L 10 M12 EU	1/10/300
3	12	10 mm ²	111406	BBP 3L 10 M12 EU	1/5/150

- 2 and 4-phase busbars for combination of Ex9L RCCB with 1P+N-pole Ex9B line MCBs
- 10 mm² for rated current up to 63 A
- Step between MCB connection points 18 mm
- Fork type connection point
- Delivered with end caps
- Busbar is designed for connecting devices from the bottom side, the order of the devices is quoted from left




Number of phases	Length MU	Cross section	Article No.	Type	Packing
2	12	10 mm ²	103868	BBUE 2L 10 M12 NL+5xLN	1/25
4	12	10 mm ²	103824	BBUE 4L 10 M12 NLLL+4xLN	1/25
4	18	10 mm ²	103825	BBUE 4L 10 M18 NLLL+7xLN	1/25

Busbars BBU and BBUE

Special type shortened busbars


- 2 and 4-phase busbars for combination of Ex9L RCCB with Ex9PN line MCBs
- 10 mm² for rated current up to 63 A
- Step between MCB connection points 8.7 mm
- Pin type connection points
- Delivered with end caps



• Busbar is designed for connecting devices from the bottom side, the order of the devices is quoted from left

Number of phases	Length MU	Cross section	Article No.	Type	Packing
2	12	10 mm ²	103867	BBUE 2L 10 M12 NL+10xNLPN	1/25
4	12	10 mm ²	103822	BBUE 4L 10 M12 NLLL+8xNLPN	1/25


- 2-phase busbar for combination of RCCB of line Ex9BL and Ex9PN line MCBs
- 10 mm² for rated current up to 63 A
- Step between MCB connection points 8.7 mm
- Pin type connection point
- Delivered with end caps



• Busbar is designed for connecting devices from the bottom side, the order of the devices is quoted from left

Number of phases	Length MU	Cross section	Article No.	Type	Packing
2	12	10 mm ²	107114	BBUE 2L 10 M12 LN+10xNLPN	1/25

- 4-pole busbar for combination of RCD with N-pole on right hand side and Ex9PN line MCBs
- 10 mm² for rated current up to 63 A
- Step between MCB connection points 8.7 mm
- Pin type connection point
- Delivered with end caps




• Busbar is designed for connecting devices from the bottom side, the order of the devices is quoted from left

Number of phases	Length MU	Cross section	Article No.	Type	Packing
4	12	10 mm ²	103823	BBUE 4L 10 M12 LLLN+8xNLPN	1/25

Busbars BBU, BBP and BBUE

End caps for BBU and BBP busbars


- End caps for 1 and 3-phase BBU and BBP busbars



Cross section	For number of phases	Article No.	Type	Packing
10 / 16 mm ²	1	101452	ECU 1L 10/16	1/1000
10 mm ²	2	113244	ECU 2L 10	1/1000
16 mm ²	2	113245	ECU 2L 16	1/1000
10 mm ²	3	101453	ECU 3L 10	1/1000
16 mm ²	3	113246	ECU 3L 16	1/1000
10 / 16 mm ²	4	113247	ECU 4L 10	1/500

End caps for BBUE busbars

- End caps for BBUE busbars



For busbar	For number of phases	Article No.	Type	Packing
BBUE 1L	1	103826	ECUE 1L	1/50
BBUE 2L	2	103827	ECUE 2L	1/50
BBUE 3L	3	103828	ECUE 3L	1/50
BBUE 4L	4	103829	ECUE 4L	1/50
BBUE 1L 35	1	103831	ECUE 1L 35	1/50
BBUE 3L 35	3	103830	ECUE 3L 35	1/50

Technical Data BBU, BBP and BBUE

Busbars BBU, BBP and BBUE

General parameters

1, 2, 3 and 4-phase busbars

Length 1 meter (can be shortened) or shortened versions (2, 6, 9, 12, 18 modules)

Special type busbars are designed for connecting devices from the bottom or top side, the order of the devices is quoted from left

Electrical parameters


Tested according to	EN 60439-1
Rated operation voltage U_e	230 / 400 V AC
Rated current I_e	63 A (10 mm ²), 80 A (16 mm ²), 125 A (30/35 mm ²)
Rated frequency f	50 Hz
Rated impulse withstand voltage U_{imp}	4 kV (BBU, BBP) 8 kV (BBUE 35), 6 kV (BBUE)

Mechanical parameters


Busbar cross section	10 / 16 / 30 / 35 mm ²
Connection point type	Fork or Pin
Connection point step	8.7 mm / 13.5 mm / 18 mm / 27 mm

Dimensions


Fork types

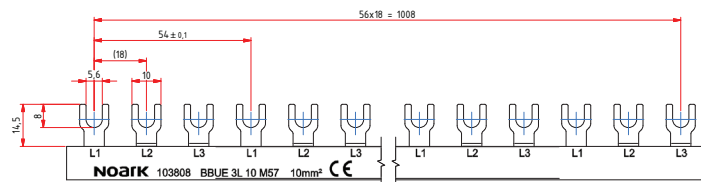


4LN fork types

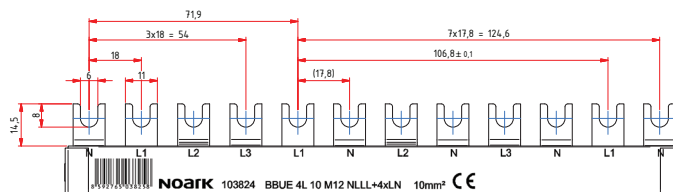


Pin types

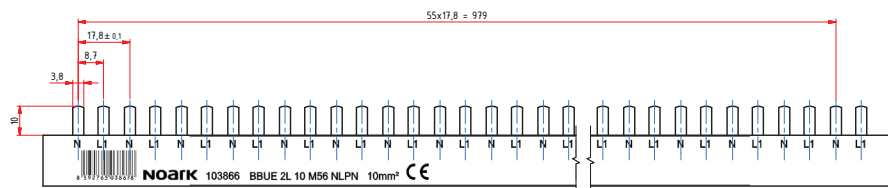

35 mm² pin types

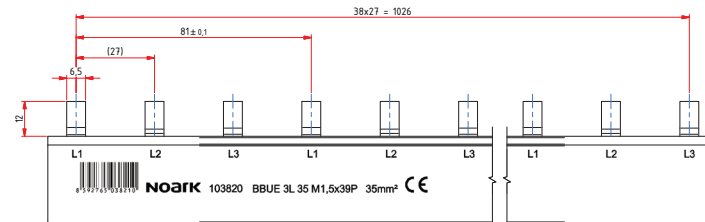

Device combination types

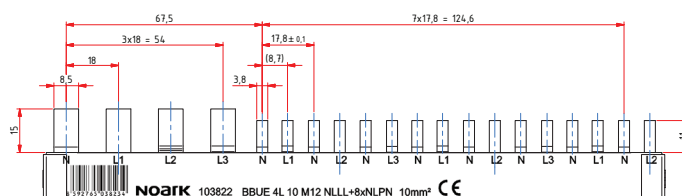


Technical Data BBU, BBP and BBUE


Busbars BBU, BBP and BBUE

Shortening


1)

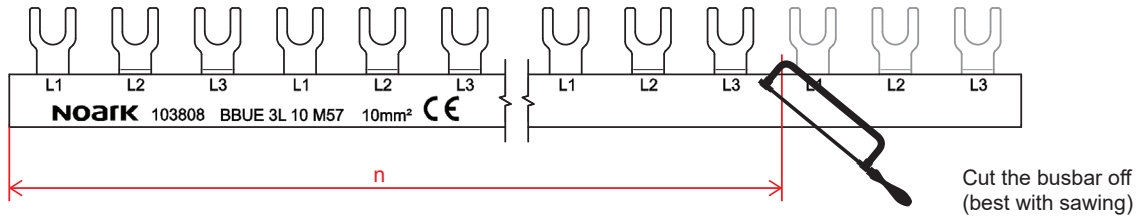


2)

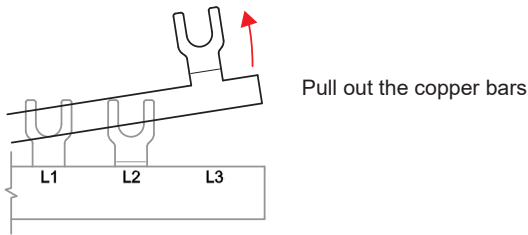

3)

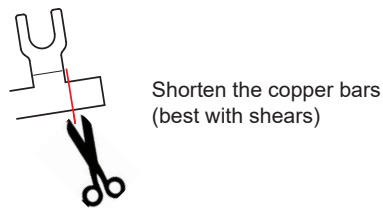

4)

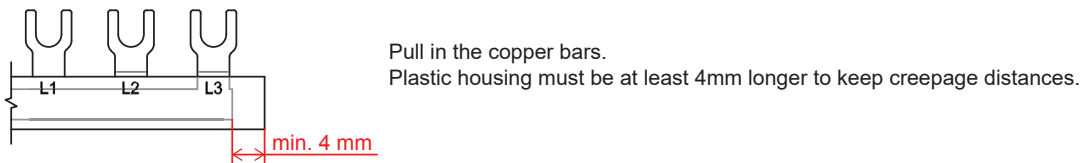

5)

