


Surface luminaire with IP54

MODUS KX 5000, 1210mm, LED 840, opal cover, surface, 1050mA, China free

Code: KX5000M4KO/ND/EU

EAN: 8596099079758

This product contains a light source with energy efficiency class C

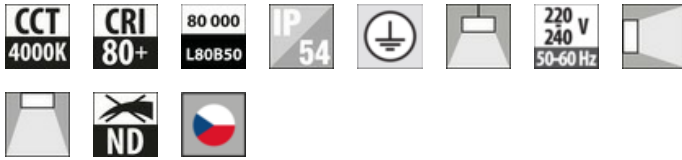

Luminaire properties

Product category:	Ceiling / wall luminaires	Effective luminous flux (lm):	5400
System power (W):	36	Luminaire efficacy (lm/W):	150
Rated lifetime L80/B50 (h):	80000	Degree of protection (IP):	IP54
Color housing:	White	Suitable for suspended mounting:	Yes
Material housing:	Steel		
Light source included:	Yes		
Suitable for wall mounting:	Yes	Suitable for surface mounting:	Yes
Suitable for ceiling mounting:	Yes	Made in Czech republic:	Yes

Light source

Light source type:	LED	Color temperature (K):	4000
Color rendering index CRI:	80-89	Replaceability:	Replaceable light source by professional, replaceable ballast
Light source type:	1990880184002	Energy efficiency class:	C

Optical system

Optical system:	KO	Light outlet:	Direct
Light sharing:	Symmetric	Material cover:	Plastic, opal

Dimensions

Length (mm):	1210	Width (mm):	110
Height/depth (mm):	60	Size version:	M
Weight (kg):	2,1		

Electrical values

Protection class:	I	Connection type:	Pinching contact
Voltage type:	AC	Type of control gear:	LED operating device current-controlled
Nominal voltage (V):	220...240	Control gear included:	Yes
No dim function:	Yes		
Without chinese components:	Yes		