

# Eaton EP-400217

Catalog Number: EP-400217

Eaton Moeller series SLC Stack light compact, Green, Yellow, Red, 230 V AC, Pulsed tone, Wall mounting

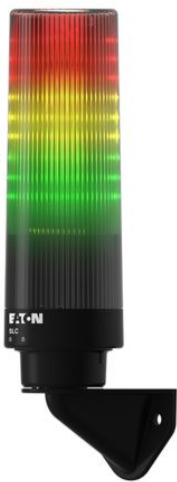


Photo is representative

## General specifications

|  |                      |
|--|----------------------|
| Product Name                                   | Catalog Number       |
| Eaton Moeller® series SLC Signal tower compact | EP-400217            |
|  | Model Code           |
|  | SLC-FW-RYG-AP-230    |
| EAN  | Product Length/Depth |
| 4015082954970                                  | 79 mm                |
| Product Height                                 | Product Width        |
| 237 mm   | 61 mm                |
| Product Weight                                 | Certifications       |
| 0.207 kg                                       | CE                   |

## defaultTaxonomyAttributeLabel

### Type

Complete device

### Product Category

SL signal towers

### Fitted with:

Push-in

### Pollution degree

3

### Alarm type

Pulsed tone

### Connection to SmartWire-DT

No

### Mounting Method

Wall

### Illumination

Continuous LED

Red blinking LED

### Decibel

70 dB

### Ambient operating temperature - max

50 °C

### Ambient operating temperature - min

-25 °C

### Leakage current

0.003 A

### Outside diameter

61 mm

### Radiation angle

360 °

### Rated operational voltage (Ue) - max

230 V

### Rated operational voltage (Ue) - min

230 V

### Color

Black tube

Green

## Resources

### Declarations of conformity

[DA-DC-00004994.pdf](#)

[DA-DC-00004998.pdf](#)

### Installation instructions

[eaton-operating-devices-stacklight-compact-slc-instruction-leaflet-il047032zu.pdf](#)

### mCAD model

[eaton-slc\\_fw\\_ryg-drawing.dwg](#)

[eaton-slc-fw-ryg-3d-model.stp](#)

Yellow

Red

#### Lens color

Green

Yellow

Red

#### Voltage type

AC

#### Material

UV Protected material

#### Mounting position

As required

#### Degree of protection

IP66

NEMA 4X

#### Overvoltage category

III

#### Lifespan, electrical

50,000 h

#### Light type

Continuous light

Red blinking light

#### Loudness

70 db

#### Light modules

LED

#### Number of modules

1

#### Rated operational voltage

230 V AC

230-240V AC +/-10% (50hz/60Hz)

#### Terminal capacity

Push-in 6-pole

up to 1,5mm<sup>2</sup> without plastic collar

up to 0,75mm<sup>2</sup> with plastic collar

#### Voltage type of operating voltage

AC

#### Operating voltage at AC, 50 Hz - min

207 V

Operating voltage at AC, 50 Hz - max  
253 V

Operating voltage at AC, 60 Hz - min  
207 V

Operating voltage at AC, 60 Hz - max  
264 V

Operating voltage at DC - min  
0 V

Operating voltage at DC - max  
0 V

Color light 1  
Green

Color light 2  
Yellow

Color light 3  
Red



Eaton Corporation plc  
Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com  
© 2024 Eaton. All rights reserved.

Eaton is a registered trademark.  
All other trademarks are property of their respective owners.

