

# Eaton EP-400209

Catalog Number: EP-400209

Eaton Moeller series SLC Stack light compact, Green, Yellow, Red, 24 V DC, Wall mounting

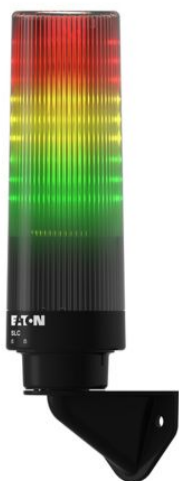


Photo is representative

## General specifications

Product Name	Catalog Number
Eaton Moeller® series SLC Signal tower compact	EP-400209
	EAN
	4015082954895
Product Length/Depth	Product Height
79 mm	237 mm
Product Width	Product Weight
61 mm	0.2 kg
Certifications	Model Code
CE	SLC-FW-RYG-24

## defaultTaxonomyAttributeLabel

### Type

Complete device

### Product Category

SL signal towers

### Fitted with:

Push-in

### Pollution degree

3

### Connection to SmartWire-DT

No

### Mounting Method

Wall

### Illumination

Continuous LED

Red blinking LED

### Decibel

0 dB

### Ambient operating temperature - max

50 °C

### Ambient operating temperature - min

-25 °C

### Leakage current

0.003 A

### Outside diameter

61 mm

### Radiation angle

360 °

### Rated operational voltage (Ue) - max

24 V

### Rated operational voltage (Ue) - min

24 V

### Color

Black tube

Green

Yellow

Red

## Resources

### Declarations of conformity

[DA-DC-00004994.pdf](#)

[DA-DC-00004998.pdf](#)

### Installation instructions

[eaton-operating-devices-stacklight-compact-slc-instruction-leaflet-il047032zu.pdf](#)

### mCAD model

[eaton-slc\\_fw\\_ryg-drawing.dwg](#)

[eaton-slc-fw-ryg-3d-model.stp](#)

#### Lens color

Green  
Yellow  
Red

#### Voltage type

DC

#### Material

UV Protected material

#### Mounting position

As required

#### Degree of protection

IP66  
NEMA 4X

#### Overvoltage category

III

#### Lifespan, electrical

50,000 h

#### Light type

Continuous light  
Red blinking light

#### Loudness

0 dB

#### Light modules

LED

#### Number of modules

1

#### Rated operational voltage

24V AC/DC +/-10% (50/60hz)

#### Terminal capacity

Push-in 6-pole  
up to 1,5mm<sup>2</sup> without plastic collar  
up to 0,75mm<sup>2</sup> with plastic collar

#### Voltage type of operating voltage

DC

#### Operating voltage at AC, 50 Hz - min

0 V

#### Operating voltage at AC, 50 Hz - max

0 V

Operating voltage at AC, 60 Hz - min

0 V

Operating voltage at AC, 60 Hz - max

0 V

Operating voltage at DC - min

24 V

Operating voltage at DC - max

24 V

Color light 1

Green

Color light 2

Yellow

Color light 3

Red



Eaton Corporation plc  
Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com  
© 2024 Eaton. All rights reserved.

Eaton is a registered trademark.  
  
All other trademarks are property of their respective owners.



Eaton.com/socialmedia