3/25/22, 12:10 PM CRICKET+ 10 C/EW



Q

HOME > PRODUCTS: CRICKET+ 10 > CRICKET+ 10 C/EW (3109815)

# CRICKET+ 10 C/EW

### Part number

3109815



Lampholder: LED

Light source: LED

Wattage: 5 W

Finishing: INOX / Stainless steel / Matt

Insulation class:

IP degree of IP67 protection:

IK-J-xxIP: IK08 9J xx5

**CRI**: 80

Colour 3000 temperature:

Power factor / >0.9 COS Φ:

**Optic:** Extra wide circle reflector

**Lightsource lumen**440 lm **output (lm)**:

Luminaire lumen 130 lm output (lm):

**L:** L90 B10

Lifetime: 94000 h

Ingrounds A1 A2 A3 A4 A5 classification:

Glass temperature 43 (°C):

Min. ambient -20 temperature (°C):



Max. ambient temperature (°C):

40

Q

























## **Description**

Series of class I reduced depth in-ground luminaires, comprising:

- Black painted anodised die-cast aluminium housing
- High-transparency polycarbonate lenses grant an optimized light transmission
- High resiliency anti-ageing silicone gasket with high elastic return capacity
- Extra clear, tempered, flat glass diffuser
- The C/EW versions have a diffuser in flat, extra clear, tempered safety glass with acid-etched finish.
- Die-cast aluminium trim painted
- Closing ring in AISI 316 stainless steel with satin finish (stainless steel versions)
- Mains connection device WATER STOP
- Recessed housing manufactured from technopolymer. Order separately
- Stainless steel external screws
- Floor mounted luminaires are subject to harsh conditions during use. For proper use and safety, they must be correctly installed by qualified personnel and according to the manual instructions
- Do not install luminaires in sunken areas
- If the device is accessible to the public, it is advisable to ensure that the glass temperature is compatible with the prevailing local installation standards. The temperature is indicated on the website, on the data sheet of each item.

3/25/22, 12:10 PM CRICKET+ 10 C/EW


- RGBW and Tunable White versions powered with SELV drivers 48V
PERFORMANCE

Charallable as accessories (ordered separately). Colour

management is through a DMX interface

- DMX signal generator for RGBW and Tunable White versions to be ordered separately
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

### Photometric data

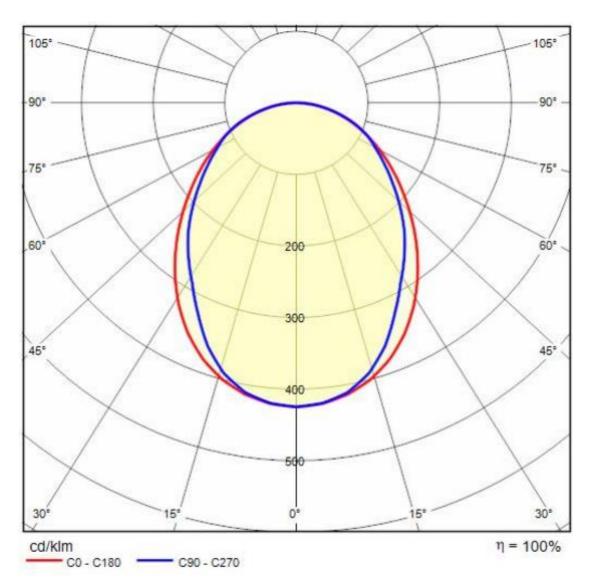


(/media2/files/CurveFotometriche/50011129.jpg)


### **Technical drawings**

3/25/22, 12:10 PM CRICKET+ 10 C/EW










(/media2/files/CAD/CRICKET\_P 10\_DT\_2.JPG)

# MANDATORY ACCESSORIES

**CRICKET+ 10** 

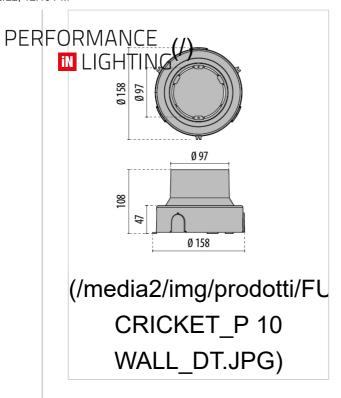

□Select

### 3109879

(/media2/img/prodotti/FULL/CCASSA CRICKET\_P 10 WALL\_DT.JPG)

Recessed fixing kit

Q



Q

iN

#### Social

(https://www.facebook.com/performanceinlighting/)
 (https://www.instagram.com/Performanceinlighting\_Group)
 (https://www.linkedin.com/company/performanceinlightinggroup)
 (https://www.youtube.com/user/performancelighting/)

Request information (/ww/en/information-request)

### **PRODUCTS**

General indoor (/ww/en/indoor/general-indoor)

Office (/ww/en/indoor/office)

Retail (/ww/en/indoor/retail)

Industrial (/ww/en/indoor/industrial)

General outdoor (/ww/en/outdoor/general-outdoor)

Architectural (/ww/en/outdoor/architectural)

Professional (/ww/en/outdoor/professional)

#### **PROJECTS**

General indoor (/ww/en/general-indoor-projects)

Office (/ww/en/office)

Retail (/ww/en/retail-2)

Industrial (/ww/en/industrial)

General outdoor (/ww/en/lighting-outdoor)

Architectural (/ww/en/architectural)

Professional (/ww/en/professional-lighting-projects)

... ,, , , , ,

Urban (/ww/en/urban)





Q

International/English

Urban (/ww/en/outdoor/urban)

Downloads (/ww/en/downloads)

Websolute

© 2021 Performance in Lighting S.p.A. a socio unico | P.Iva: 08517220011 - Privacy Policy (/ww/en/privacy) - Cookie Policy (/ww/en/cookie-policy)