

SHP-T Basic Plus
Shp-T 150w Basic Plus E40
0020847



PRODUCT OVERVIEW

Product name	Shp-T 150w Basic Plus E40
Technology	HID
Watt (Rated) (W)	155
Lamp shape	Tubular shape
Cap/Base	E40
Lamp finish	Clear
Fixture rating	Open
General application	Logistics & Industry
ETIM Class	EC000821
E-number FI	4844464
Useful luminous flux (Fuse)	18000
Luminous flux (lm)	18000
Colour temperature (K)	2000
CRI (Ra)	20
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Power consumption (W)	155
Wattage (W)	155
Dimmable	No
Dimming method	Mains: leading / trailing edge
Average life (Nominal) (h)	32000
Product EAN number	5410288208473

DATA TABLE

General data	
Product name	Shp-T 150w Basic Plus E40
Technology	HID
Watt (Rated) (W)	155
Lamp shape	Tubular shape
Cap/Base	E40
Lamp finish	Clear
Fixture rating	Open
General application	Logistics & Industry
ETIM Class	EC000821
E-number FI	4844464

SHP-T Basic Plus

Shp-T 150w Basic Plus E40

0020847

Optical data

Useful luminous flux (Fuse)	18000
Luminous flux (lm)	18000
Luminous flux (Rated) (lm)	18000
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	2000
CRI (Ra)	20
Colour Variation Initial (SDCM)	N/A
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 4000 h 50Hz	96
Rated lumen maint. factor (%) at 6000 h 50Hz	95
Rated lumen maint. factor (%) at 8000 h 50Hz	93
Rated lumen maint. factor (%) at 12000 h 50Hz	90
Rated lumen maint. factor (%) at 16000 h 50Hz	88
Rated lumen maint. factor (%) at 20000 h 50Hz	86

Electrical data

Power consumption (W)	155
Wattage (W)	155
Current (A)	1.8
Primary Supply/Product voltage - min (V)	100
Primary Supply/Product voltage - max (V)	100
Control gear required	Yes
Dimmable	No
Dimming method	Mains: leading / trailing edge
Lamp Energy Label (class)	F
kWh per 1000 hours burning time	165

Lifetime data

Average life (Nominal) (h)	32000
Average life (Rated) (h)	32000
Life T90	16000
Rated survival factor (%) at 2000 h 50Hz	100
Rated survival factor (%) at 4000 h 50Hz	99
Rated survival factor (%) at 6000 h 50Hz	98
Rated survival factor (%) at 8000 h 50Hz	97
Rated survival factor (%) at 12000 h 50Hz	93
Rated survival factor (%) at 16000 h 50Hz	90
Rated survival factor (%) at 20000 h 50Hz	86

SHP-T Basic Plus
Shp-T 150w Basic Plus E40
0020847

Physical data

Nominal Product Length (mm)	205
Nominal Product Diameter (mm)	46
Max. Lamp Diameter (mm) - D	47
Weight (kg)	0.109


Packaging

Product EAN number	5410288208473
Packaging single length / height (cm)	24.1
Packaging single width (cm)	4.9
Packaging single depth (cm)	5.0
DUN14 (outer)	15410288208470
Units per outer package	12
Packaging outer length / height (cm)	25.5
Packaging outer width (cm)	16.1
Packaging outer depth (cm)	21.7


Safety data

Lamp mercury content (mg)	8.00
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

PHOTOMETRY

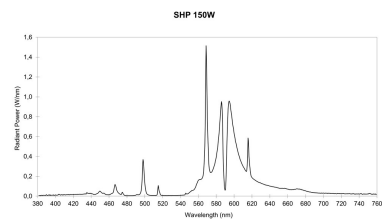

TECHNICAL DRAWINGS




SHP-T Basic Plus
Shp-T 150w Basic Plus E40
0020847



ENERGY
SYLVANIA

0020847

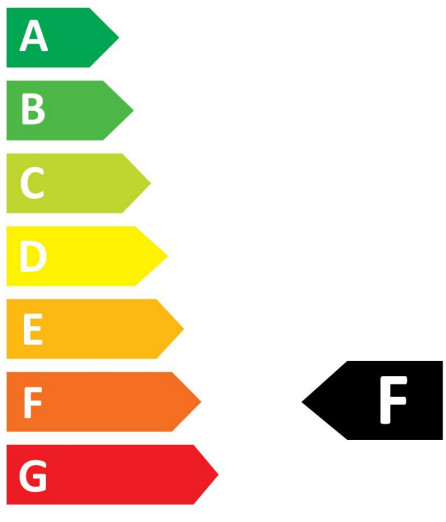


155
kWh/1000h



SHP-T Basic Plus
Shp-T 150w Basic Plus E40
0020847



0020847

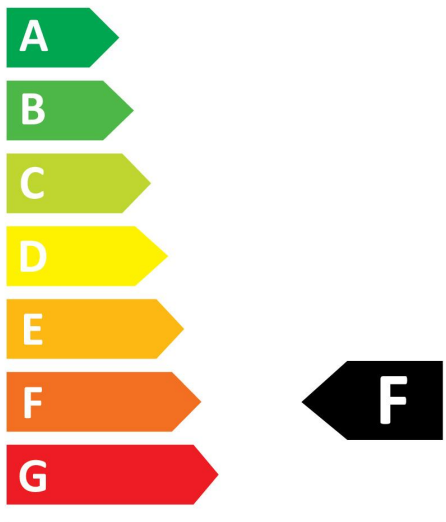

155
kWh/1000h



2019/2015