

PRODUCT DATASHEET

SF BLKH EYELID 250 BK

SURFACE BULKHEAD 250 SENSOR | Robust wall and ceiling luminaire with IP65 protection and high-frequency sensor



Product features


- Eyelid ring for Surface Bulkhead
- Available for 250 mm and 300 mm Bulkhead version
- Available in black and white color
- Impact resistance: IK10



TECHNICAL DATA

Dimensions & Weight

Diameter	258 mm
Height	64.0 mm
Product weight	210.00 g

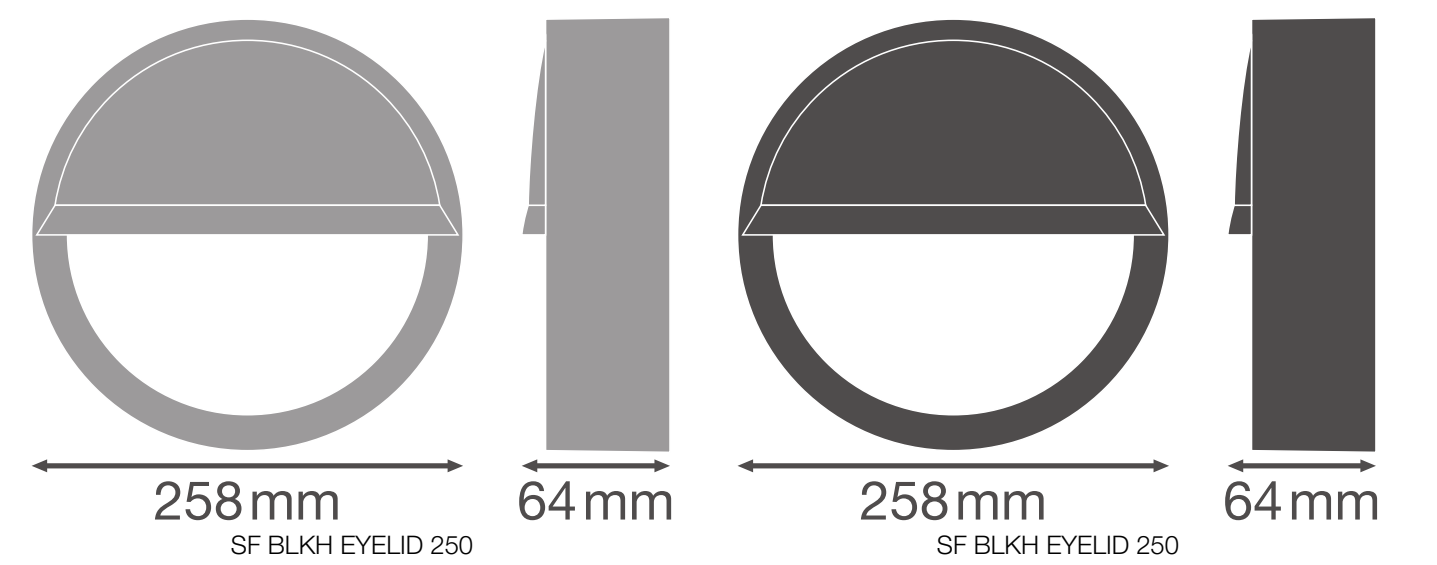

Materials & Colors

Product color	Black
Cover material	Polycarbonate (PC)

Application & Mounting

Mounting location	Luminaire
-------------------	-----------






Certificates & Standards

Standards	CE
Luminaire with limited surface temperature, "D sign"	No

EQUIPMENT / ACCESSORIES

- Anti-theft screw included

DOWNLOAD DATA

Documents and certificates		Document name
	User Instruction	SURFACE BULKHEAD
Photometric and lighting design files		Document name
	IES file (IES)	IES SF BLKH EYELID 250 BK 4000K
	IES file (IES)	IES SF BLKH EYELID 250 BK 3000K
CAD/BIM files		Document name
	BIM_Revit_3D	SF BLKH 300 P
Tender texts		Document name
	Tender documents	SURFACE BULKHEAD EYELID 250 BK-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075375505	Folding box 1	74 mm x 272 mm x 262 mm	292.00 g	5.27 dm ³
4058075375512	Shipping box 8	550 mm x 285 mm x 315 mm	2918.00 g	49.38 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.