


Datasheet

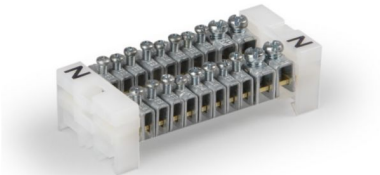

ENSTO CLAMPO GROUND ENSTO

N-busbar Cu 2x(2x16mm² + 8x6mm²)
REF. KNA4.110 | 1913460 | EAN. 6418677162817

> [Visit e-catalogue](#)

Description

N busbar for distribution boards with pillar terminals

Technical characteristics

Connectable conductor cross section fine-strand without cable end sleeve	1.5 - 10 mm ²
Connectable conductor cross section fine-strand with cable end sleeve	1.5 - 10 mm ²
Connectable conductor cross section multi-wired	1.5 - 16 mm ²
Rated current In	82 A
Rated voltage	500 V
Type of electrical connection 1	Screw connection

Number of levels	1
Number of clamp positions per level	20
Mounting method	DIN rail (top hat rail) 35 mm
Operating temperature	-5 - 80 °C
Explosion-tested version 'Ex e'	No
Colour	Other

Documentation

CAD & Design specs / BIM

2D_23301_V1.PDF | PDF (0.02Mo)

Agreements & certificates

- CE_KN4_2024_FI.pdf | PDF (0.05Mo)
- CE_KN4_2024_EN.pdf | PDF (0.05Mo)