


Product data sheet

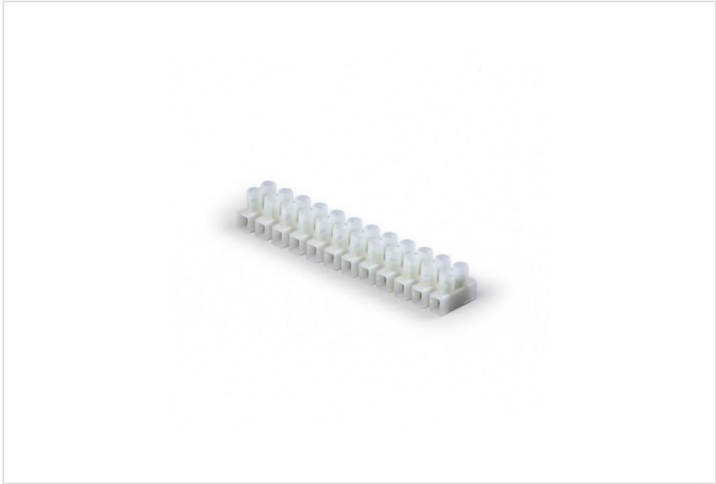

ENSTO CLAMPO ENSTO

Terminal strip 1616UF.12SP-AK, 12-p, 1,5 mm²

REF. KB16.12 | EAN. 6418677105593

> [The product details page](#)

Tehnilised omadused

Drill hole distance centrically	8 mm
Explosion-tested version 'Ex e'	No
Connectable conductor cross section fine-strand without cable end sleeve	0.75 - 1.5 mm ²
Connectable conductor cross section fine-strand with cable end sleeve	0.75 - 1.5 mm ²
Connectable conductor cross section multi-wired	0.75 - 1.5 mm ²
Rated current In	15 A
Rated voltage	450 V
Type of electrical connection 1	Screw connection
Type of electrical connection 2	Screw connection

Number of poles	12
Number of clamp positions per pole	2
Mounting method	Direct mounting
Material insulation body	Thermoplastic
Inflammability class of insulation material according to with UL94	V2
Closing plate required	No
Colour	White
Transparent	Yes

Dokumentatsioon

Lepingud ja sertifikaadid

→ [CE_KA-KB16-17_2024_EN.pdf](#) | PDF (0.05Mo)