

Connecting comb 16-pole



product brand name	SIRIUS
product category	Connecting combs
product designation	Connecting comb
design of the product	For linking the same potentials, current carrying capacity for infeed max. 6 A/16-pole
General technical data	
display version LED	No
product component semi-conductor output	No
flammability class of enclosure material	UL94 V-0
reference code according to IEC 81346-2	X
Substance Prohibitance (Date)	03/25/2015
Weight	0.004 kg
Mechanical data	
product component plug-in socket	No
Connections/ Terminals	
product function removable terminal	No
Installation/ mounting/ dimensions	
height	3.3 mm
width	99 mm
depth	11 mm
Ambient conditions	
ambient temperature - during operation - during storage - during transport	-25 ... +60 °C -40 ... +85 °C -40 ... +85 °C
Approvals Certificates	
General Product Approval	EMV



[Confirmation](#)



[KC](#)

Marine / Shipping	other	Environment
-------------------	-------	-------------



[Confirmation](#)

[Environmental Con-
firmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RQ3901-0D>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RQ3901-0D>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RQ3901-0D>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RQ3901-0D&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RQ3901-0D/manual>

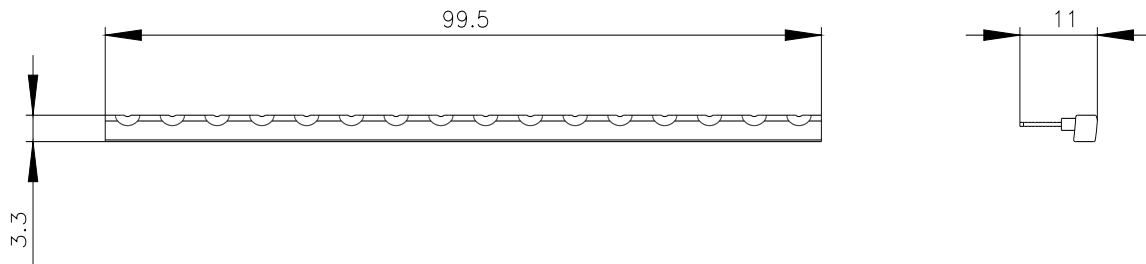

last modified:

5/6/2021 