

# FBS 3-5 - Plug-in bridge



3030174

<https://www.phoenixcontact.com/pc/products/3030174>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, length: 23 mm, color: red

## Your advantages

- The 2- to 50-pos. jumpers can bridge up to 50 terminal blocks in the two bridge shafts of the CLIPLINE complete system in one step

## Commercial data

|                                      |                    |
|--------------------------------------|--------------------|
| Item number                          | 3030174            |
| Packing unit                         | 50 pc              |
| Minimum order quantity               | 50 pc              |
| Product key                          | BE2Z2X             |
| Catalog page                         | Page 70 (C-1-2019) |
| GTIN                                 | 4017918188528      |
| Weight per piece (including packing) | 2.588 g            |
| Weight per piece (excluding packing) | 2.466 g            |
| Customs tariff number                | 85366990           |
| Country of origin                    | DE                 |

## Technical data

### Product properties

|                     |                |
|---------------------|----------------|
| Product type        | Plug-in bridge |
| Number of positions | 3              |
| Pitch               | 5.2 mm         |

### Data management status

|                  |    |
|------------------|----|
| Article revision | 10 |
|------------------|----|

### Electrical properties

|                      |                                                                                                                                                                                                           |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum load current | 24 A (The current values for the jumpers can deviate when used in different modular terminal blocks. The precise values can be found in the accessories data for the respective modular terminal blocks.) |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Connection data

|                      |                                                                                                                                                                                                           |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum load current | 24 A (The current values for the jumpers can deviate when used in different modular terminal blocks. The precise values can be found in the accessories data for the respective modular terminal blocks.) |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Dimensions

|        |         |
|--------|---------|
| Width  | 14.2 mm |
| Height | 22.7 mm |
| Depth  | 3 mm    |
| Length | 22.7 mm |
| Pitch  | 5.2 mm  |

### Material specifications

|                                        |                |
|----------------------------------------|----------------|
| Color                                  | red (RAL 3001) |
| Material                               | Copper         |
| Flammability rating according to UL 94 | V0             |
| Insulating material                    | PA             |

### Environmental and real-life conditions

#### Ambient conditions

|                                          |                                                                                                                              |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)                                                    |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                                                                              |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                                                                              |
| Permissible humidity (operation)         | 20 % ... 90 %                                                                                                                |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                                                                                |

# FBS 3-5 - Plug-in bridge

3030174

<https://www.phoenixcontact.com/pc/products/3030174>




## Mounting

| Mounting type | Plug-in mounting |
|---------------|------------------|
|---------------|------------------|

## Drawings

Schematic diagram

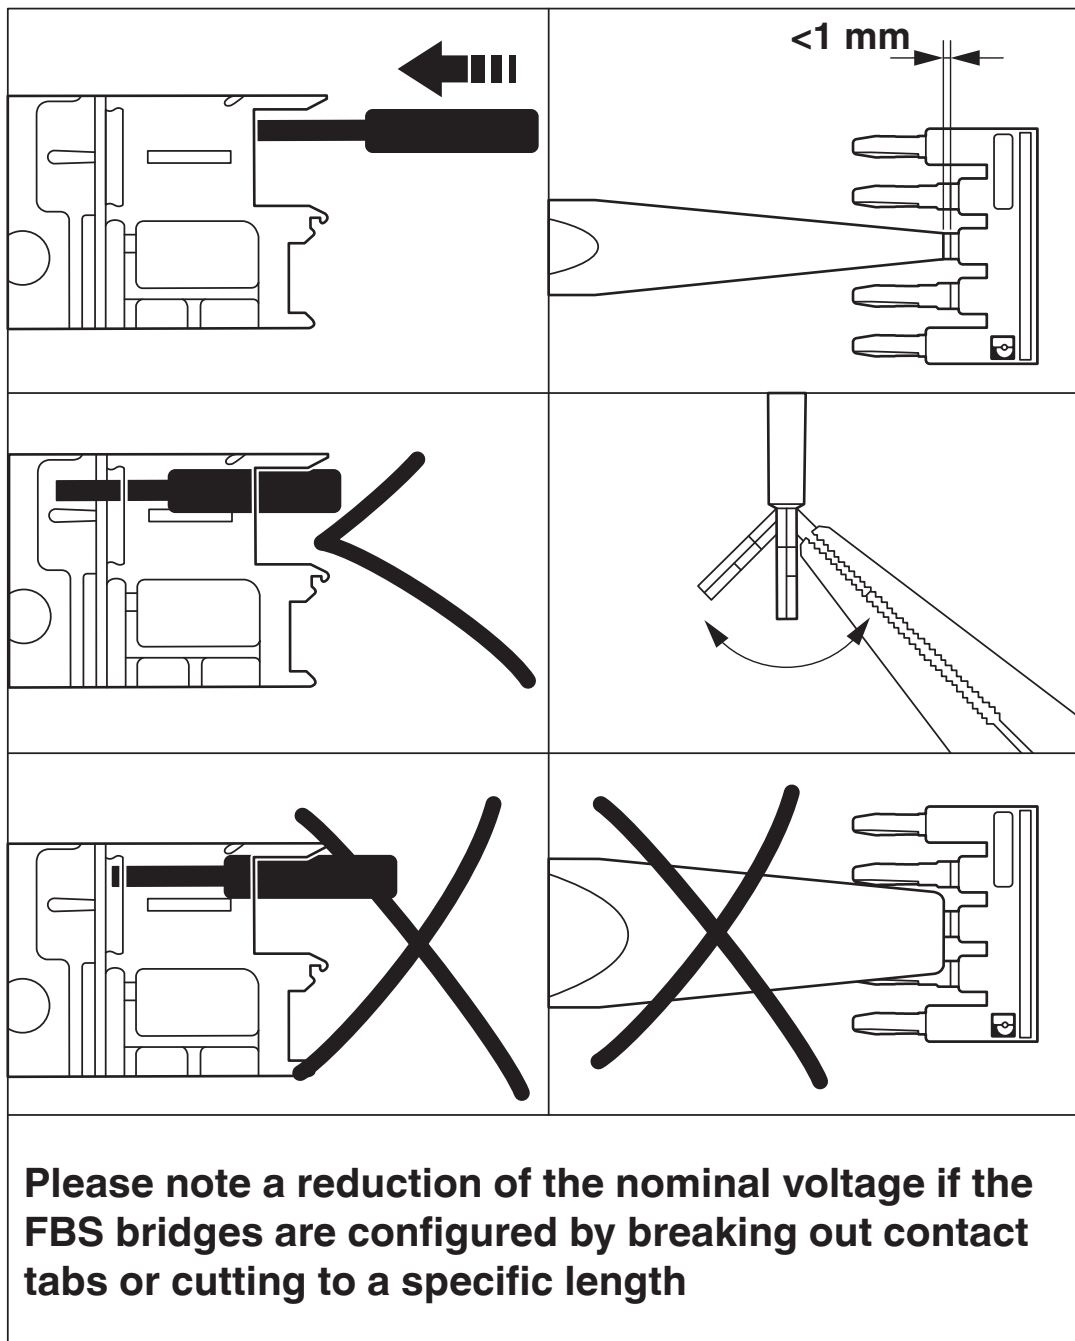

# FBS 3-5 - Plug-in bridge



3030174

<https://www.phoenixcontact.com/pc/products/3030174>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27141140 |
| ECLASS-12.0 | 27141140 |
| ECLASS-13.0 | 27250303 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000489 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# FBS 3-5 - Plug-in bridge

3030174

<https://www.phoenixcontact.com/pc/products/3030174>



## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# FBS 3-5 - Plug-in bridge

3030174

<https://www.phoenixcontact.com/pc/products/3030174>



## Accessories

### FBSC - Protective cap

3012325

<https://www.phoenixcontact.com/pc/products/3012325>



Covering hood, provides reliable shock protection when using cut-to-length FBS .  
...-5 and FBS ...-6 bridges, color: red

---

### CUTFOX-FBS - Front cutter

1212124

<https://www.phoenixcontact.com/pc/products/1212124>



Cutting tool, for separating individual jumper bars from FBS ... plug-in  
bridges and EB ... insertion bridges

---

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)