


## MICRODUCT NESTOR OPTIMUS DB N X 7/3,5 MM

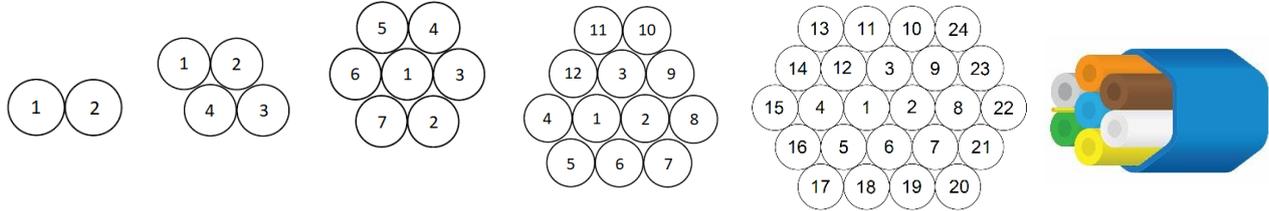

Application	Microduct / duct bundle for direct buried installation or installation in existing protective pipes or cable shafts.		
Construction	Material	The individual ducts are made of HDPE.	
	Colour coding	The ducts are colour-coded according to customer specifications, FIN 2012, ANSI/TIA, IEC or other.	
	Trace wire	Duct bundles can be equipped with a tracer wire according to customer specifications.	
	Outer sheath	The duct bundles are sheathed with a common HDPE sheath. Sheath marking is printed on one-meter intervals. The sheath marking is printed according to customer specifications.	

Nominal dimensions of bare duct without outer sheath				
Duct type	Dimensions [mm]		Weight [kg/km]	Tensile strength
	Outer Diameter	Wall Thickness		
7/3,5 mm	7,0 ± 0,1	min. 1,65	27,5	270 N

Nominal dimensions of ducts and duct bundles with outer sheath					
Configuration		Diameter [mm]		Weight [kg/km]	Tensile strength
Count	Grouping	Duct OD	Maximum OD		
1	1 x 7/3,5 mm	7,0 ± 0,1	8,0	39	380 N
2	2 x 7/3,5 mm	7,0 ± 0,1	16,0	93	910 N
4	4 x 7/3,5 mm	7,0 ± 0,1	21,1	162	1580 N
7	7 x 7/3,5 mm	7,0 ± 0,1	23,0	258	2520 N
12	12 x 7/3,5 mm	7,0 ± 0,1	30,0	415	4060 N
24	24 x 7/3,5mm	7,0 ± 0,1	44,0	775	7570 N

Temperature ranges		
Temperature range	Installation	-15 - +40 °C
	Transport, storage and operation	-45 - +60 °C

Mechanical characteristics			
Characteristics	Test Methods	Descriptions	Requirements
Tensile strength (*)	IEC 60794-1-21, method E1	Test length >1 m Duration 10 min	Load = 9,81 x W [N] W = mass of 1 km [kg/km]
Bending (cold) (*)	IEC 60794-1-21, method E11B	Temperature -15 °C Cycles 10	Mandrel diameter 30 x OD
Repeated bending (*)	IEC 60794-1-21, method E6	Load 20 N Cycles 35 Time per cycle ~2 s	Bending diameter 30 x OD
Impact (*)	IEC 60794-1-21, method E4	Anvil diameter 50 mm Surface radius 300 mm Recovery time 1 hour	Impact energy 5 J
Torsion (*)	IEC 60794-1-21, method E7	Test length 1 m Load 20 N Cycles 5	Number of turns ±1 (360° in both directions)
Kink (*)	IEC 60794-1-21, method E10	Temperature 20 °C	Loop diameter 20 x OD
Crush (*)	IEC 60794-1-21, method E3	Duration 1 min Recovery time 1 hour	Load (plate/plate) 2000 N
Pressure withstand (**)	IEC 60794-1-22, method F13	Test length 1 m Temperature 60 °C Duration 30 min	Pressure (water) 15 bar
Coefficient of friction (COF)	S 201-10150	Wheel Test Without adding lubricant	≤ 0,1

Acceptance criteria:

(\*) After the test, under visual examination, without magnification, there shall be no damage and the tested sample shall pass the inner clearance test (\*\*\*). If a recovery time is defined, the inner clearance test is done after the recovery time.

(\*\*) Under visual examination, without magnification, there shall be no damage to the tested microduct.

(\*\*\*) Inner clearance test is done by passing a metal sphere through the tested section of microduct or microduct assembly. The minimum diameter of the sphere is 85% of the nominal microduct bore diameter (ID). The test is passed if the sphere passes through the microduct.