


Product data sheet

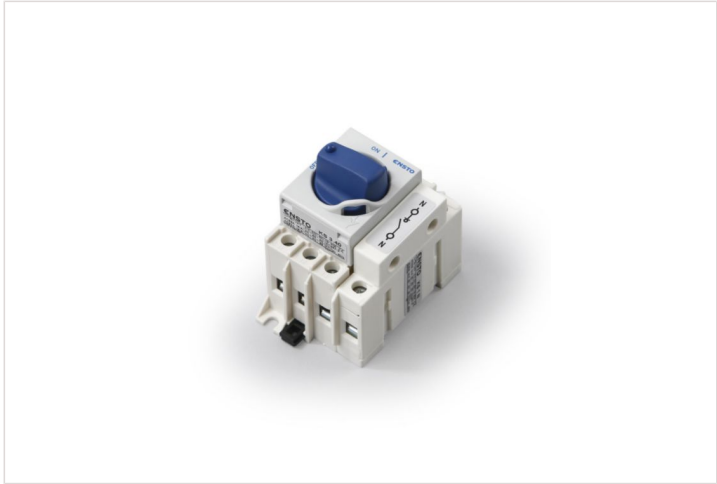

ENSTO COMPACT SWITCHES ENSTO

Load break switch rotary 3 x 40A + switched neutral
REF. KS3.40N | EAN. 6438100099343

> [The product details page](#)

Tehnilised omadused

Version as main switch	Yes
Version as maintenance-/service switch	Yes
Version as safety switch	No
Version as emergency stop installation	No
Version as reversing switch	No
Max. rated operation voltage Ue AC	690 V
Rated operating voltage	400 - 690 V
Rated permanent current at AC-21, 400 V	40 A
Rated operation power at AC-3, 400 V	10 kW
Rated short-time withstand current Icw	1.26 kA
Rated operation power at AC-23, 400 V	18.5 kW

Conditioned rated short-circuit current Iq	50 kA
Number of poles	3
Motor drive optional	No
Motor drive integrated	No
Voltage release optional	No
Device construction	Complete device in housing
Suitable for distribution board installation	Yes
Colour control element	Other
Type of control element	Short thumb-grip
Interlockable	Yes
Type of electrical connection of main circuit	Screw connection

Dokumentatsioon

CAD & Disaini spetsifikatsioonid / BIM

→ 3D_KS3-XXN_PK2_V1.stp | IFC (5.04Mo)