VASM / VASM L

Heat-shrinkable closure system for telecommunication cables


Closure system for cutted and uncutted telecommunication cables in the unpressurized distribution network of the DEUTSCHE TELEKOM AG. Suitable for all types of cable sheaths and splices.

VASM

Closure type for standard installation practice, 6 sizes for cables up to 700 wire pairs.

VASML

Closure type for installations with longer sheath opening, 3 sizes for cables up to 400 wire pairs.

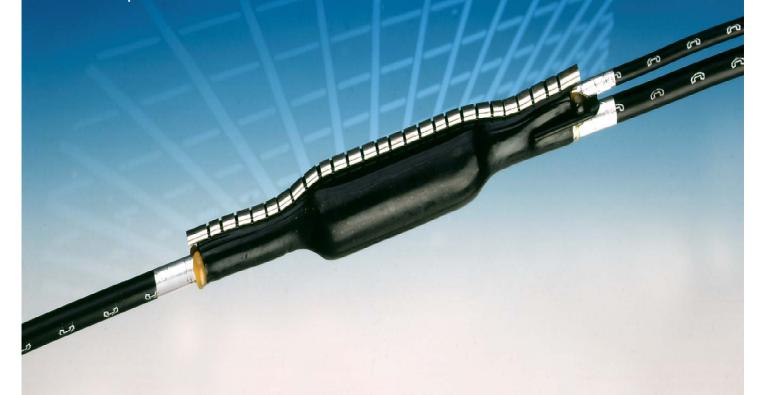

Characteristics of the VASM

- High mechanical strenght due to the laminated liner
- Reliable sealing of the splice area against humidity by means of hot melt adhesive
- Max. 3 cable inlets and outlets on each side
- Simple and reliable installation without requirement of special tools



Ordering information Table of application




Kit content

Heat shrinkable sleeve Liner Flexible channel Retension clip Shield continuity wire Drying agent Cleaning cloth Abrasive strip Installation instruction

Accessories for branch-offs

- 1. Branch-off clip small for VASM 1/6-4/6, 1/6L-3/6L
- 2. Branch-off clip large for VASM 5/6 und 6/6
- 3. Shield continuity wire for branch-offs (SVL/1)
- 4. Shield continuity clip SVAK

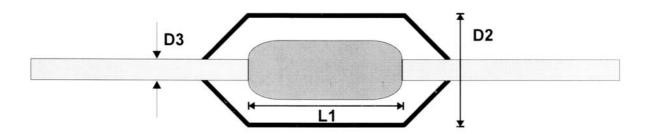

| Size/Type | Sheath opening max. | Outer diameter over liner max. | Cable diameter min. D3 | Length of sleeve | Article No. | Deutsche Telekom MNr |
|------------|---------------------|--------------------------------|---------------------------------|------------------|-------------|----------------------|
| VASM 1/6 | 130 | 43 | 8 | 330 | 2015001 | 30005140 |
| VASM 2/6 | 160 | 68 | 15 | 385 | 2015002 | 30005141 |
| VASM 3/6 | 190 | 93 | 25 | 385 | 2015003 | 30005142 |
| VASM 4/6 | 190 | 120 | 28 | 430 | 2015004 | 30005143 |
| VASM 5/6 | 280 | 122 | 28 | 600 | 2015005 | 30005144 |
| VASM 6/6 | 330 | 137 | 34 | 725 | 2015006 | 30005145 |
| VASM 1/6L* | 200 | 43 | 8 | 390 | 2015007 | 30005146 |
| VASM 2/6L* | 210 | 68 | 15 | 450 | 2015008 | 30005147 |
| VASM 3/6L* | 240 | 93 | 25 | 495 | 2015009 | 30005148 |

All dimensions in mm

*For installations with longer sheath opening

