


3100318
<https://www.phoenixcontact.com/pc/products/3100318>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Protective conductor terminal block, number of connections: 2, connection method: Screw connection, 1 level, cross section: 0.14 mm² - 1.5 mm², mounting type: NS 15, color: green-yellow

Your advantages

- Low contact resistance
- Corrosion-free terminal points
- Green-yellow housing
- Captive terminal block screws

Commercial data

Item number	3100318
Packing unit	50 pc
Minimum order quantity	50 pc
Product key	BE1261
GTIN	4017918099268
Weight per piece (including packing)	2.88 g
Weight per piece (excluding packing)	2.693 g
Customs tariff number	85369010
Country of origin	TR

MT 1,5-PE - Protective conductor terminal block



3100318

<https://www.phoenixcontact.com/pc/products/3100318>

Technical data

Notes

General	When aligning with a feed-through terminal block of the same shape, an end cover must be interposed for insulation voltages of > 320 V
---------	--

Product properties

Product type	Ground terminal block
Number of connections	2
Number of rows	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	0.56 W

Connection data

Number of connections per level	2
Nominal cross section	1.5 mm ²

1 level

Screw thread	M2
Note	Please observe the current carrying capacity of the DIN rails.
Tightening torque	0.22 ... 0.25 Nm
Stripping length	6 mm
Internal cylindrical gage	A1
Connection in acc. with standard	IEC 60947-7-2
Conductor cross section rigid	0.14 mm ² ... 1.5 mm ²
Cross section AWG	26 ... 16 (converted acc. to IEC)
Conductor cross section flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross section, flexible [AWG]	26 ... 16 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm ² ... 0.75 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.25 mm ² ... 0.75 mm ²

Dimensions

Width	4.2 mm
Height	22 mm
Depth on NS 15	23.5 mm

Material specifications

Color	green-yellow
-------	--------------

MT 1,5-PE - Protective conductor terminal block



3100318

<https://www.phoenixcontact.com/pc/products/3100318>

Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	130 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	28 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-2
----------------------------------	---------------

Mounting

Mounting type	NS 15
---------------	-------

MT 1,5-PE - Protective conductor terminal block




3100318

<https://www.phoenixcontact.com/pc/products/3100318>

Drawings

Circuit diagram

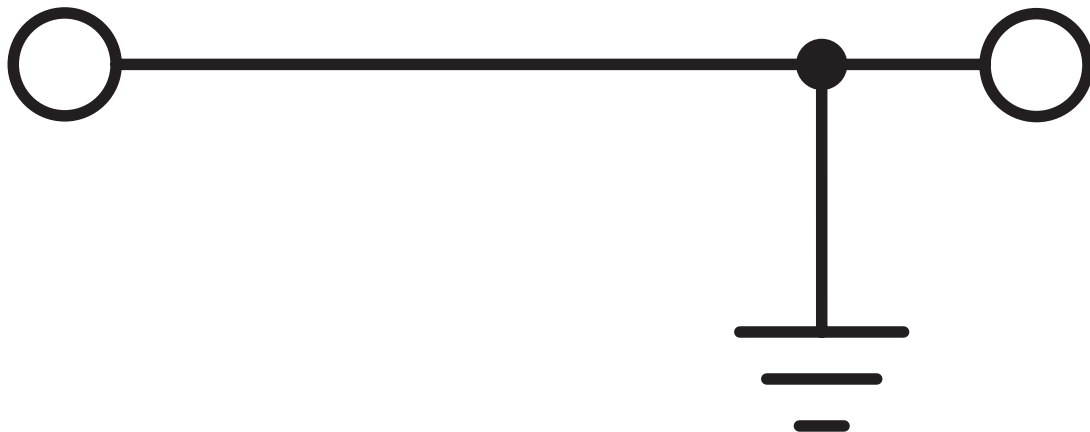

MT 1,5-PE - Protective conductor terminal block



3100318

<https://www.phoenixcontact.com/pc/products/3100318>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/3100318>

CSA Approval ID: 13631				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	-	-	28 - 14	-

cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	-	-	30 - 14	-
Use group F				
	-	-	30 - 14	-
Use group D				
	-	-	30 - 14	-

CCA Approval ID: NTR-NL 4243				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	-	-	-	- 1.5

LR Approval ID: LR2041789TA-02				
-----------------------------------	--	--	--	--

BV Approval ID: 07774/E0 BV				
--------------------------------	--	--	--	--

EAC Approval ID: KZ7500651131219505				
--	--	--	--	--

DNV Approval ID: TAE00001CT				
--------------------------------	--	--	--	--

MT 1,5-PE - Protective conductor terminal block



3100318

<https://www.phoenixcontact.com/pc/products/3100318>

Classifications

ECLASS

ECLASS-13.0	27250103
-------------	----------

ETIM

ETIM 9.0	EC000901
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

MT 1,5-PE - Protective conductor terminal block



3100318

<https://www.phoenixcontact.com/pc/products/3100318>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

MT 1,5-PE - Protective conductor terminal block



3100318

<https://www.phoenixcontact.com/pc/products/3100318>

Accessories

NS 15 UNPERF 2000MM VPE 10 - DIN rail, unperforated

1401695

<https://www.phoenixcontact.com/pc/products/1401695>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 15 PERF 2000MM VPE 10 - DIN rail perforated

1401682

<https://www.phoenixcontact.com/pc/products/1401682>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

MT 1,5-PE - Protective conductor terminal block



3100318

<https://www.phoenixcontact.com/pc/products/3100318>

NS 15 AL PERF 2000MM VPE 10 - DIN rail perforated

1401763

<https://www.phoenixcontact.com/pc/products/1401763>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

NS 15 WH PERF 2000MM-VPE 10 - DIN rail perforated

1204096

<https://www.phoenixcontact.com/pc/products/1204096>



DIN rail perforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

MT 1,5-PE - Protective conductor terminal block



3100318

<https://www.phoenixcontact.com/pc/products/3100318>

ZBF 4:UNBEDRUCKT - Zack Marker strip, flat

0808587

<https://www.phoenixcontact.com/pc/products/0808587>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: latching, for terminal block width: 4 mm, Number of individual labels: 10, text field height: 5.2 mm, text field width: 4.2 mm

ZBF 4 CUS - Zack Marker strip, flat

0825023

<https://www.phoenixcontact.com/pc/products/0825023>



Zack Marker strip, flat, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 4.2 mm, Number of individual labels: 10, text field height: 5.2 mm, text field width: 4.2 mm

MT 1,5-PE - Protective conductor terminal block



3100318

<https://www.phoenixcontact.com/pc/products/3100318>

ZBF 4,LGS:FORTL.ZAHLEN - Zack Marker strip, flat

0808626

<https://www.phoenixcontact.com/pc/products/0808626>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 4 mm, Number of individual labels: 10, text field height: 5.2 mm, text field width: 4.2 mm

ZBF 4,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808820

<https://www.phoenixcontact.com/pc/products/0808820>



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: latching, for terminal block width: 4 mm, Number of individual labels: 10, text field height: 5.2 mm, text field width: 4.2 mm

MT 1,5-PE - Protective conductor terminal block



3100318

<https://www.phoenixcontact.com/pc/products/3100318>

ZBF 4,LGS:GERADE ZAHLEN - Zack Marker strip, flat

0810818

<https://www.phoenixcontact.com/pc/products/0810818>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: consecutive even numbers 2 ... 20, 22 ... 40, etc. up to 82 ... 100, mounting type: latching, for terminal block width: 4 mm, Number of individual labels: 10, text field height: 5.15 mm, text field width: 4.15 mm

ZBF 4,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810850

<https://www.phoenixcontact.com/pc/products/0810850>



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: latching, for terminal block width: 4 mm, Number of individual labels: 10, text field height: 5.15 mm, text field width: 4.15 mm

MT 1,5-PE - Protective conductor terminal block




3100318

<https://www.phoenixcontact.com/pc/products/3100318>

UC-TMF 4 - Marker for terminal blocks

0818166

<https://www.phoenixcontact.com/pc/products/0818166>




Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 4.2 mm, Number of individual labels: 120, text field height: 5.1 mm, text field width: 3.6 mm

UC-TMF 4 CUS - Marker for terminal blocks

0824630

<https://www.phoenixcontact.com/pc/products/0824630>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 4.2 mm, Number of individual labels: 120, text field height: 5.1 mm, text field width: 3.6 mm

MT 1,5-PE - Protective conductor terminal block



3100318

<https://www.phoenixcontact.com/pc/products/3100318>

UCT-TMF 4 - Marker for terminal blocks

0828742

<https://www.phoenixcontact.com/pc/products/0828742>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 4.2 mm, Number of individual labels: 90, text field height: 4.7 mm, text field width: 3.4 mm

UCT-TMF 4 CUS - Marker for terminal blocks

0829651

<https://www.phoenixcontact.com/pc/products/0829651>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 4.2 mm, Number of individual labels: 90, text field height: 4.7 mm, text field width: 3.4 mm

MT 1,5-PE - Protective conductor terminal block

3100318

<https://www.phoenixcontact.com/pc/products/3100318>



PAI-4 - Test adapter

3030925

<https://www.phoenixcontact.com/pc/products/3030925>



Test adapter, Touch proof against unintentional direct contact according to DIN EN 50274 when plugged in, for 4 mm test plug and terminal blocks with 8.2 mm pitch, number of positions: 1, color: gray

CLIPFIX 15 - End bracket

3022263

<https://www.phoenixcontact.com/pc/products/3022263>



Snap-on end bracket, to be snapped onto NS 15 DIN rail

MT 1,5-PE - Protective conductor terminal block

3100318

<https://www.phoenixcontact.com/pc/products/3100318>



SZS 0,4X2,5 VDE - Screwdriver

1205037

<https://www.phoenixcontact.com/pc/products/1205037>



Screwdriver, slot-headed, VDE insulated, size: 0.4 x 2.5 x 80 mm, 2-component grip, with non-slip grip

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com