


Ex9C09D~18D/ Ex9C25D~38D



Contactor
Stykač
Stýkač
Stycznik
Contactor
Leistungsschütz
Contacteur
Контактор
Контактор
Motorni kontaktor

IEC/EN 60947-4-1

Mounting instructions

Montážní návod

Montážne inštrukcie

Instrukcja montazu

Instrucțiuni de asamblare

Montageanweisung

Instructions de montage

Инструкция по монтажу

Monteringsanvisning

Istruzioni di montaggio

Instrucciones de montaje

Összeszerelési útmutató

Asennusohjeita

Montage-instructies

Instruções de montagem

Navodila za montažo

Οδηγίες Εγκατάστασης

Инструкции за инсталиране

Monteringsvejledningen

Montažu upute

Surinkimo instrukcijos

Instalēšanas instrukcijas

Скупштина упутство

Paigaldusjuhendid

Caution: Installation by electricians only

Varování: Montáž pouze osobou s elektrotech. kvalifikací

Varovanie: Montáž iba osobou s elektrotech. kvalifikáciou

Uwaga: Montaż tylko przez uprawnionych instalatorów

Atenție: Instalare numai de către electricieni

Vorsicht: Montagenur durch Elektrofachkräfte



Attention: Montage uniquement par un électricien

Осторожно: Монтаж только электрика



NOARK

B Accessories installation



AX42

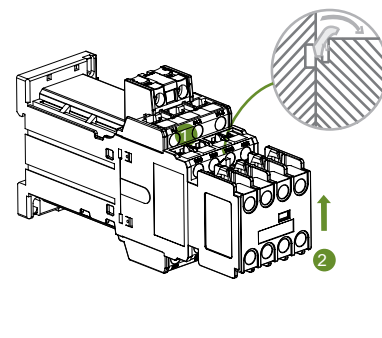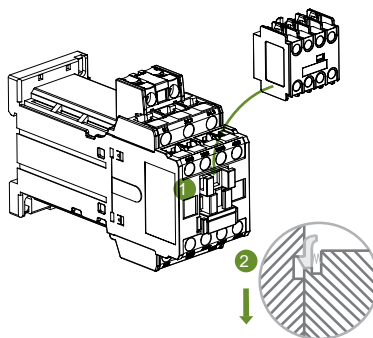

TDD41/42

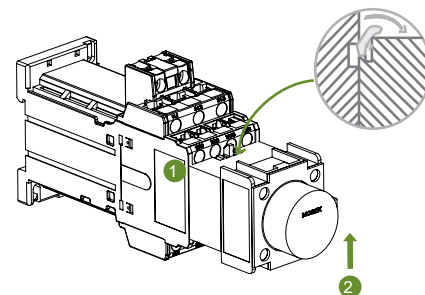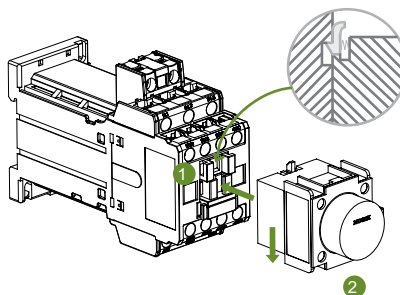


CCU42

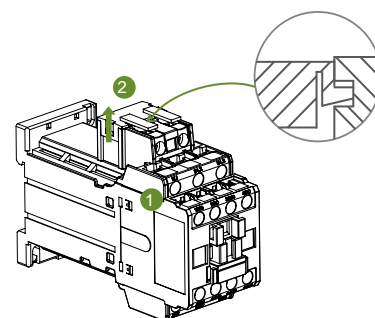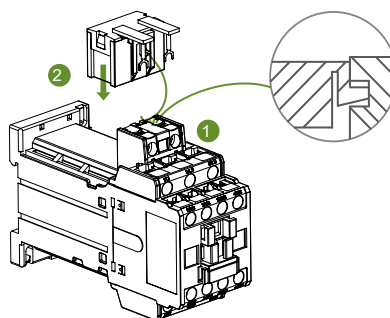


A Compatible accessories

AX42	Auxiliary contact
TDD41/42	Delayed contact
CCU42	Surge arrester

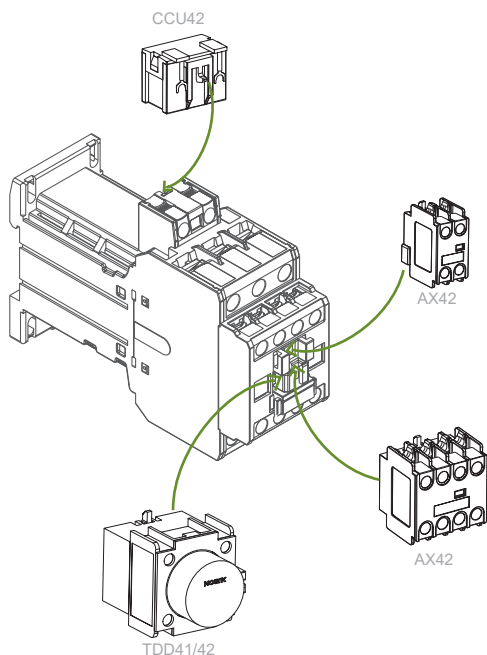


C Wiring configuration




11







22

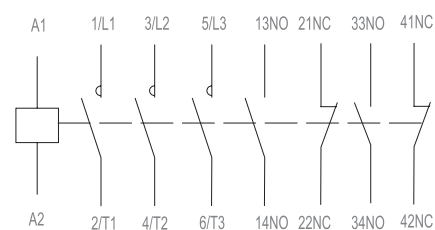

D Installation




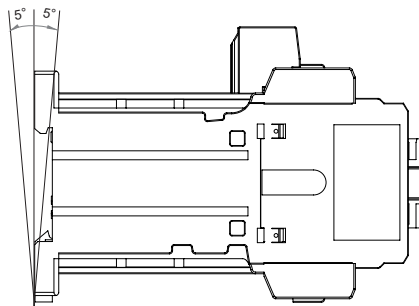
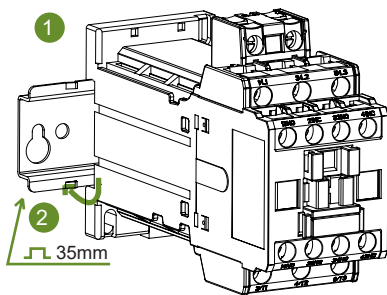


E Dimensions

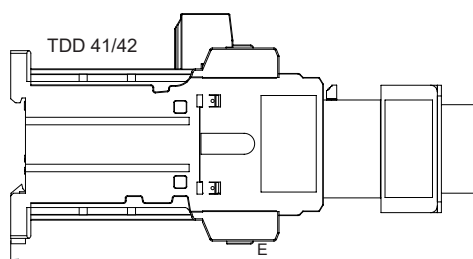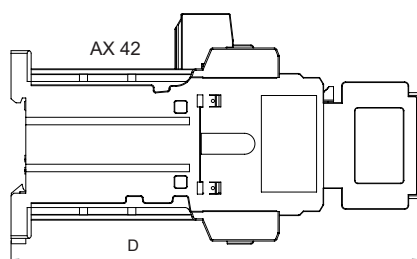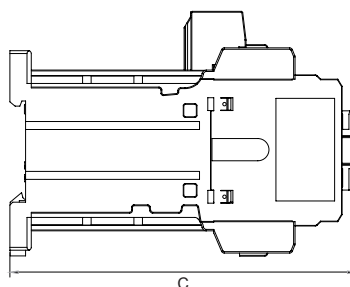

Type	Code	A	B	C	D	E
Ex9C09D~18D		87	45	123	160(AX42)	183(TDD4)
Ex9C25D~38D		97	45	141	178(AX42)	201(TDD4)

F Wiring terminals installation

			 mm ²	 mm ²	 mm ²	 mm ²	 mm ²	 mm ²
			C	D	E	F	G	H
	 Note: 1.2 - 1.7 Nm is recommended		 mm ²	 mm ²	 mm ²	 mm ²	 mm ²	 mm ²
			1~2.5	1~2.5	1~2.5	1~2.5	1~2.5	1~2.5
Type \ Code	A	B	C	D	E	F	G	K
Ex9C09D~18D	M3.5	1.2 Nm	1.5 ~ 6	1.5 ~ 6	1 ~ 6	1 ~ 4	1.5 ~ 6	1.5 ~ 6
Ex9C25D - 38D	M4	2 Nm	2.5 ~ 10	2.5 ~ 10	2.5 ~ 10	2.5~ 6	4 ~ 50	2.5 ~ 10

In order to protect the environment, when the product or its components are scrapped, please dispose of it as industrial waste or hand it over to the recycling station for disaggregation, recycling and reuse according to relevant national regulations.



Printed with environment-friendly paper
Copyright NOARK. All Rights Reserved

NOARK

DEFINITION OF RELIABILITY

Ex9C09D~12D/Ex9C25D~38D
JG_20240929EU

Manufacturer: NOARK Electric (Shanghai) Co., Ltd. 3857
Sixian Road, Songjiang District, Shanghai

Importer: NOARK Electric Europe s.r.o., Sezemická 2757/2,
193 00 Praha 9, Czech Republic, www.noark-electric.eu