


Siemens  
EcoTech



holder, 4-way, plastic, for selector switch with 4 switch positions and for coordinate switch

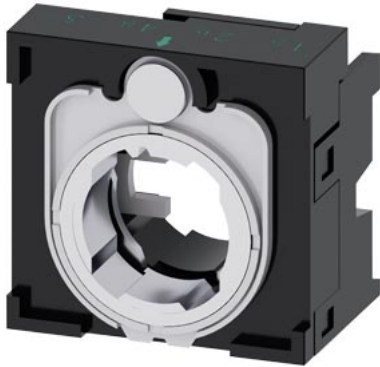

|                                                  |                                    |
|--------------------------------------------------|------------------------------------|
| product brand name                               | SIRIUS ACT                         |
| product designation                              | Holders                            |
| design of the product                            | holder for plastic                 |
| product type designation                         | 3SU1                               |
| manufacturer's article number                    |                                    |
| • of the supplied holder                         | <a href="#">3SU1500-0AA10-0AA0</a> |
| <b>Actuator</b>                                  |                                    |
| design of the actuating element                  | 4-way without module               |
| number of contact modules                        | 0                                  |
| <b>Holder</b>                                    |                                    |
| material of the holder                           | Plastic                            |
| <b>Display</b>                                   |                                    |
| number of LED modules                            | 0                                  |
| <b>General technical data</b>                    |                                    |
| product function positive opening                | No                                 |
| product component                                |                                    |
| • diode                                          | No                                 |
| • lamp transformer                               | No                                 |
| • light source                                   | No                                 |
| • series resistor                                | No                                 |
| insulation voltage rated value                   | 500 V                              |
| degree of pollution                              | 3                                  |
| surge voltage resistance rated value             | 6 kV                               |
| shock resistance                                 |                                    |
| • according to IEC 60068-2-27                    | sinusoidal half-wave 15g / 11 ms   |
| • for railway applications according to EN 61373 | Category 1, Class B                |
| vibration resistance                             |                                    |
| • according to IEC 60068-2-6                     | 10 ... 500 Hz: 5g                  |
| • for railway applications according to EN 61373 | Category 1, Class B                |
| reference code according to IEC 81346-2          | U                                  |
| Substance Prohibitance (Date)                    | 10/01/2014                         |
| Weight                                           | 35 g                               |
| <b>Auxiliary circuit</b>                         |                                    |
| number of NC contacts for auxiliary contacts     | 0                                  |
| number of NO contacts for auxiliary contacts     | 0                                  |
| <b>Connections/ Terminals</b>                    |                                    |
| tightening torque of the screws in the bracket   | 1 ... 1.2 N·m                      |

| Ambient conditions                                             |                                                                                                            |
|----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>ambient temperature</b>                                     |                                                                                                            |
| • during operation                                             | -25 ... +70 °C                                                                                             |
| • during storage                                               | -40 ... +80 °C                                                                                             |
| environmental category during operation according to IEC 60721 | 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted) |

| Environmental footprint                                |                 |
|--------------------------------------------------------|-----------------|
| Environmental Product Declaration(EPD)                 | Yes             |
| global warming potential [CO2 eq] total                | 0.787 kg        |
| global warming potential [CO2 eq] during manufacturing | 0.566 kg        |
| global warming potential [CO2 eq] during operation     | 0.235 kg        |
| global warming potential [CO2 eq] after end of life    | -0.015 kg       |
| Siemens Eco Profile (SEP)                              | Siemens EcoTech |

| Installation/ mounting/ dimensions         |                      |
|--------------------------------------------|----------------------|
| <b>fastening method</b>                    | without              |
| • of modules and accessories               | Front plate mounting |
| <b>height</b>                              | 40 mm                |
| <b>width</b>                               | 40 mm                |
| <b>shape of the installation opening</b>   | round                |
| <b>installation width</b>                  | 40 mm                |
| <b>installation depth</b>                  | 32.1 mm              |
| <b>thickness of the front plate usable</b> | 1 ... 6 mm           |

| Approvals Certificates   |                   |                      |
|--------------------------|-------------------|----------------------|
| General Product Approval | Test Certificates | Maritime application |



[Type Test Certificates/Test Report](#)



|                      |       |             |
|----------------------|-------|-------------|
| Maritime application | other | Environment |
|----------------------|-------|-------------|



[Confirmation](#)



Siemens  
EcoTech



| Environment |
|-------------|
|-------------|

[Environmental Confirmations](#)

| Further information |
|---------------------|
|---------------------|

#### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

#### Information for data generation and storage

<https://support.industry.siemens.com/cs/ww/en/view/109995012>

#### Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1500-0BA10-0AA0>

#### Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1500-0BA10-0AA0>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SU1500-0BA10-0AA0>

#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SU1500-0BA10-0AA0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1500-0BA10-0AA0&lang=en)

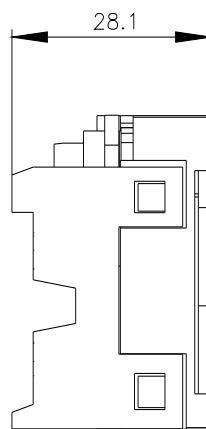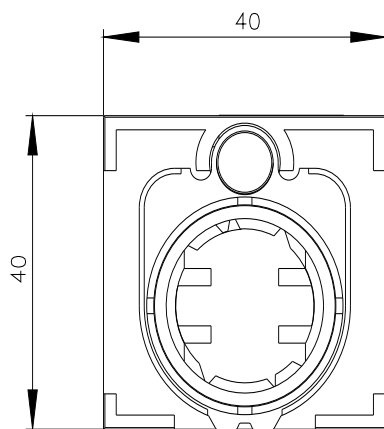

last modified:

4/2/2025 