

PSD-S 50 OE LED GN - Optical element



1018264

<https://www.phoenixcontact.com/fr/products/1018264>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Permanent light element, 16 V DC ... 26 V DC, green, LED

Product description

This optical signal element is designed to be part of a modular signal tower. According to your requirements, a signal tower can be combined as desired, from a maximum of five signal elements. Set up to a maximum of five optical signal elements or up to four optical and one audible signal element. Only use an audible signal element as the top element. A bayonet locking system establishes the mechanical and electrical connection between the elements. Connection elements with spring-cage connection can be used for electrical connection of the signal tower. Various accessories are available to assemble the signal tower. Please note that PSD-S 50 signal towers (50 mm diameter) are not mechanically compatible with PSD-S signal towers (70 mm diameter).

Your advantages

- High light and color intensity
- LED service life 100000 h
- Low power consumption
- Smooth exterior design
- Degree of protection IP65

Commercial data

Item number	1018264
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DRL112
Product key	DRL112
GTIN	4055626502281
Weight per piece (including packing)	47.6 g
Weight per piece (excluding packing)	47.6 g
Customs tariff number	85318070
Country of origin	AT

PSD-S 50 OE LED GN - Optical element



1018264
<https://www.phoenixcontact.com/fr/products/1018264>

Technical data

Notes

Note on application

Note on application	Only for industrial use
---------------------	-------------------------

Product properties


Product type	Signal element
Product family	PSD-S 50
Area of application	Signal tower
Base	B15d (bayonet)

Electrical properties

General

Input voltage	24 V DC
Nominal input voltage range	16 V DC ... 26 V DC
Maximum inrush current	max. 500 mA
Current consumption	max. 35 mA
Source of light type	LED
Service life electrical	max. 100,000 h
Optical signal type	Permanent light

Dimensions

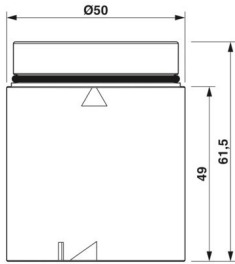Dimensional drawing	
Height	61.5 mm
Diameter	50 mm

Material specifications

Calotte color	green
Material	Polycarbonate PC

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65 (when installed or with end cover)
Ambient temperature (operation)	-30 °C ... 60 °C

PSD-S 50 OE LED GN - Optical element



1018264

<https://www.phoenixcontact.com/fr/products/1018264>

Mounting

Mounting type	Plug-in mounting (Seal pre-installed for each element)
Mounting position	any


PSD-S 50 OE LED GN - Optical element

1018264

<https://www.phoenixcontact.com/fr/products/1018264>



Drawings

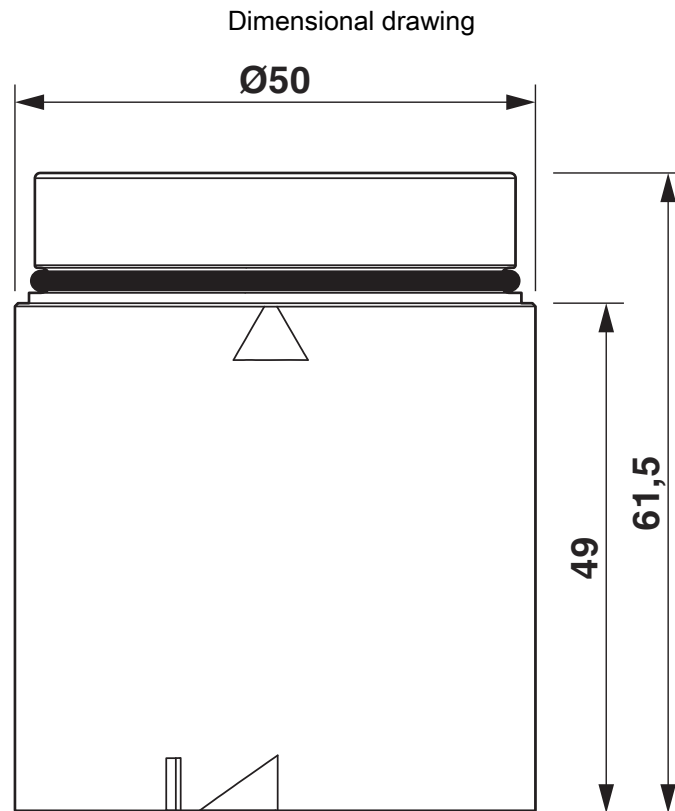

PSD-S 50 OE LED GN - Optical element



1018264

<https://www.phoenixcontact.com/fr/products/1018264>

Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/fr/products/1018264>



cULus Listed

Approval ID: E140324

PSD-S 50 OE LED GN - Optical element



1018264

<https://www.phoenixcontact.com/fr/products/1018264>

Classifications

ECLASS

ECLASS-13.0	27371220
ECLASS-15.0	27371220

ETIM

ETIM 9.0	EC000232
----------	----------

UNSPSC

UNSPSC 21.0	46171600
-------------	----------

PSD-S 50 OE LED GN - Optical element



1018264

<https://www.phoenixcontact.com/fr/products/1018264>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

PSD-S 50 OE LED GN - Optical element

1018264

<https://www.phoenixcontact.com/fr/products/1018264>



Accessories

PSD-S 50 CE - Connection element

1018740

<https://www.phoenixcontact.com/fr/products/1018740>

Base for horizontal and third-party tube assembly



PSD-S 50 CE-M12-5P - Connection element

1018853

<https://www.phoenixcontact.com/fr/products/1018853>

Base with integrated M12 male (5 pins)



PSD-S 50 OE LED GN - Optical element

1018264

<https://www.phoenixcontact.com/fr/products/1018264>



PSD-S 50 CE A-NPT 1/2 - Connection element

1018850

<https://www.phoenixcontact.com/fr/products/1018850>

Base for NPT 1/2 conduit assembly



PSD-S 50 CE BR-SM/HCR - Connection element

1018742

<https://www.phoenixcontact.com/fr/products/1018742>

Base for vertical assembly



PSD-S 50 OE LED GN - Optical element

1018264

<https://www.phoenixcontact.com/fr/products/1018264>



PSD-S 50 CE BT 100 - Connection element

1018760

<https://www.phoenixcontact.com/fr/products/1018760>

Tube base on 100 mm plastic tube with integrated foot



PSD-S 50 CE BT 250-M - Connection element

1018801

<https://www.phoenixcontact.com/fr/products/1018801>

Tube base on 250 mm aluminum tube with plastic foot



PSD-S 50 OE LED GN - Optical element

1018264

<https://www.phoenixcontact.com/fr/products/1018264>



PSD-S 50 CE BT 400-M - Connection element

1018845

<https://www.phoenixcontact.com/fr/products/1018845>

Tube base on 400 mm aluminum tube with plastic foot



Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT SAS

52 Boulevard de Beaubourg Emerainville

77436 Marne La Vallée Cedex 2 France

+33 (0) 1 60 17 98 98

documentation@phoenixcontact.fr