

Rittal – The System.

Faster – better – everywhere.



RX 9360.705

RiLineX component support

State: 23/02/2026 (Source: rittal.com/com-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE



SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



RX 9360.705 - RiLineX component support without contact system

RiLineX component support in width 45 mm for RiLineX and 60 mm busbar system platforms, without contact system. Ideal for securing wider equipment onto the board.

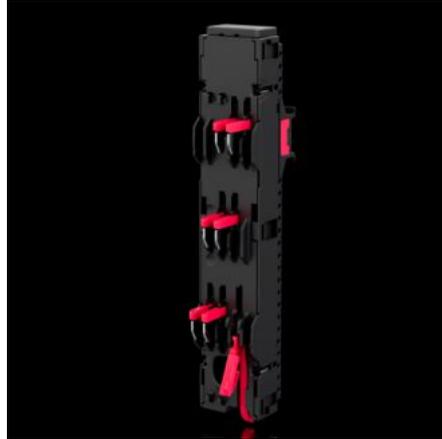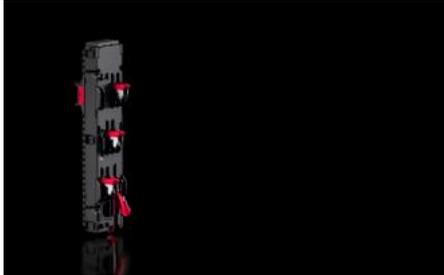

Features

| | |
|---|---|
| Model No. | RX 9360.705 |
| Design | without contact system |
| Benefits | For mounting equipment for top hat rail installation, e.g. motor starter Simple clip locking for support rails Optional anti-slip guard Coordinated accessories reduce the number of different items required Snap-on mounting and simple adjustment for busbar thickness (5/10 mm) |
| Material | Polyamide (PA 6) Fire protection corresponding to UL 94 |
| Colour | RAL 9005 |
| For bar systems with centre-to-centre spacing | 60 mm |
| Dimensions | Width: 45 mm Height: 239.4 mm Depth: 36.2 mm |

Features

| | |
|-----------------------|--|
| To fit busbars | 15 x 5/10 20 x 5/10 30 x 5/10 |
| To fit busbar system | RiLineX RiLine60 |
| Number of poles | 3-pole |
| Support rails Qty | 1 |
| Rated voltage | 690 V AC 600 V AC (UL) 600 V DC (UL) |
| Packs of | 4 pc(s). |
| Net weight | 1.16 kg |
| Gross weight | 1.2 kg |
| Customs tariff number | 85369095 |
| ETIM 9 | EC001531 |
| Product description | RiLineX component support in width 45 mm for RiLineX and 60 mm busbar system platforms, without contact system. Ideal for securing wider equipment onto the board. |

Approvals

| | |
|--------------|---------------------------|
| Approvals | UL + C-UL (listed) |
| Explanations | Declaration of conformity |