


PRODUCT DATASHEET

PL SF SUSPENSION KIT L/E/N/DA+/DA-

PANEL SURFACE SUSPENSION KIT | Suspension kit with integrated cable and terminal block

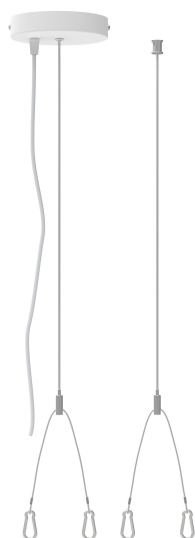

Areas of application

- Suitable for PANEL SURFACE

Product benefits

- Kit for easy suspension of PANEL SURFACE luminaires
- Maximum suspension distance to ceiling 1500 mm, adjustable
- Direct electrical connection in canopy (protection class I)


Product features

- Round metal canopy with preinstalled 5-pole terminal block
- 2- or 4-pole cable preinstalled to connect with luminaire driver
- Y-shaped metal wire suspension with carabiners
- Versions for protection class II luminaire wiring: 2-pole (standard) or 4-pole (DALI)

TECHNICAL DATA

Dimensions & Weight

Diameter	151.00 mm
Height	50.00 mm
Product weight	150.00 g
Cable length	1500.00 mm



PL SF SUSPENSION KIT

Materials & Colors

Product color	White
RAL Color (most similar)	RAL 9003

Application & Mounting

Type of protection	IP20
Mounting location	Ceiling
Replaceable light source	No

Emergency lighting

Type of emergency operation test	None
Wattage in emergency operation mode	5 W
Luminous flux in emergency operation mode	

Certificates & Standards

Standards	CE / UKCA
-----------	-----------






Additional product data

Product remark	Available from March 2026
----------------	---------------------------

EQUIPMENT / ACCESSORIES

- Transparent wire clamps for attachment to the metal wire suspension included

DOWNLOAD DATA

	Documents and certificates	Document name
	Legal information	Safety Insert G11218828
	Legal information	Legal Insert G11178159
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	PL SF
	Declarations of conformity UKCA	PL SF

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854732027	BAG 1	250 mm x 200 mm x 40 mm	160.00 g	2.00 dm ³
4099854732034	Shipping box 8	365 mm x 170 mm x 176 mm	1645.00 g	10.92 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.