

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Disconnect terminal block, Current and voltage are determined by the plug used., nom. voltage: 400 V, nominal current: 20 A, Thermal continuous current I_{th} : 20 A, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm² - 4 mm², mounting: NS 35/7,5, NS 35/15, color: gray

Your advantages

- Globally recognized: Internationally proven screw connection
- Maintenance-free and vibration-resistant thanks to the patented Reakdyn principle
- Space savings and flexibility with the connection of two identical conductors
- Long-term stable connections with the use of high-quality materials
- Low self-heating due to high contact forces
- Full flexibility thanks to the standardized CLIPLINE complete bridging, marking, and testing accessories
- Individual and easy assembly with isolating plug, fuse plug, component connector, and feed-through connector

Commercial data

Item number	3046388
Packing unit	50 pc
Minimum order quantity	50 pc
Product key	BE1132
GTIN	4046356055796
Weight per piece (including packing)	10.09 g
Weight per piece (excluding packing)	9 g
Customs tariff number	85369010
Country of origin	CN

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

Technical data

Notes

General	Current and voltage are determined by the plug used.
---------	--

Product properties

Product type	Disconnect terminal block
Product family	UT
Area of application	Railway industry
	Machine building
	Plant engineering
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.77 W

Connection data

Number of connections per level	2
Nominal cross section	2.5 mm ²
Rated cross section AWG	12
Connection method	Screw connection
Screw thread	M3
Tightening torque	0.5 ... 0.6 Nm
Stripping length	9 mm
Internal cylindrical gage	A3
Connection in acc. with standard	IEC 60947-7-1
Conductor cross-section rigid	0.14 mm ² ... 4 mm ²
Cross section AWG	26 ... 12 (converted acc. to IEC)
Conductor cross-section flexible	0.14 mm ² ... 4 mm ²
Conductor cross-section, flexible [AWG]	26 ... 12 (converted acc. to IEC)
Conductor cross-section flexible ultrasound-compressed	0.34 mm ² ... 4 mm ²
Conductor cross-section, flexible [AWG] ultrasound-compressed	22 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 2.5 mm ²
Flexible conductor cross-section (ferrule with plastic sleeve)	0.14 mm ² ... 2.5 mm ²
2 conductors with same cross section, rigid	0.14 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible	0.14 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible, with ferrule	0.14 mm ² ... 1.5 mm ²

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

without plastic sleeve	
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² ... 1.5 mm ²
Nominal cross section	2.5 mm ²
Thermal continuous current I _{th}	20 A
Nominal current	20 A (with 4 mm ² conductor cross-section)
Maximum load current	20 A (with 4 mm ² conductor cross-section)
Nominal voltage	400 V

Dimensions

Width	5.2 mm
End cover width	2.2 mm
Height	57.8 mm
Depth on NS 35/7,5	47.5 mm
Depth on NS 35/15	55 mm

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test

Test voltage setpoint	7.3 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
	Test passed
Short-time withstand current 2.5 mm ²	0.3 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	1.89 kV
-----------------------	---------

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

Result	Test passed
--------	-------------

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Mechanical tests

Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
Test force setpoint	1 N
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2018-05
Spectrum	Long life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	$6.12 \text{ (m/s}^2\text{)}^2\text{/Hz}$
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

UT 2,5-TG - Disconnect terminal block


3046388

<https://www.phoenixcontact.com/pc/products/3046388>



Drawings

Circuit diagram

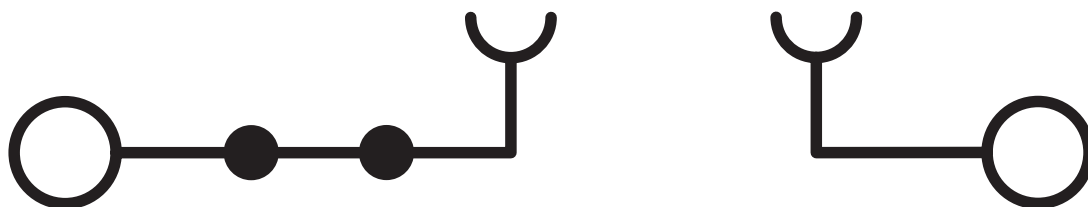

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/3046388>



EAC

Approval ID: KZ7500651131219505



cULus Recognized

Approval ID: E60425

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
B				
	300 V	16 A	26 - 12	-
Multi-conductor connection	300 V	16 A	26 - 16	-
C				
	300 V	16 A	26 - 12	-
Multi-conductor connection	300 V	16 A	26 - 16	-
D				
	300 V	10 A	26 - 12	-
Multi-conductor connection	300 V	10 A	26 - 16	-



CSA

Approval ID: 13631

	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
B				
	300 V	16 A	26 - 12	-
C				
	300 V	16 A	26 - 12	-
D				
	300 V	10 A	26 - 12	-

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

Classifications

ECLASS

ECLASS-13.0	27250107
ECLASS-15.0	27250107

ETIM

ETIM 10.0	EC000897
-----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	8fb65ad9-6b7f-483d-96bc-9382509e9d61

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

Accessories

i Note: Applying some accessories below might limit this product.

FBS 2-5 - Plug-in bridge

3030161

<https://www.phoenixcontact.com/pc/products/3030161>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, nominal current: 24 A, length: 23 mm, color: red

i Max. current carrying capacity: 20 A

FBS 3-5 - Plug-in bridge

3030174

<https://www.phoenixcontact.com/pc/products/3030174>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, nominal current: 24 A, color: red

i Max. current carrying capacity: 20 A

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>

FBS 4-5 - Plug-in bridge

3030187

<https://www.phoenixcontact.com/pc/products/3030187>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, nominal current: 24 A, length: 23 mm, color: red

 Max. current carrying capacity: 20 A

FBS 5-5 - Plug-in bridge

3030190

<https://www.phoenixcontact.com/pc/products/3030190>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, nominal current: 24 A, length: 23 mm, color: red

 Max. current carrying capacity: 20 A

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>

FBS 10-5 - Plug-in bridge

3030213

<https://www.phoenixcontact.com/pc/products/3030213>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, nominal current: 24 A, length: 23 mm, color: red

 Max. current carrying capacity: 20 A

FBS 20-5 - Plug-in bridge

3030226

<https://www.phoenixcontact.com/pc/products/3030226>



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, nominal current: 24 A, color: red

 Max. current carrying capacity: 20 A

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

FBS 50-5 - Plug-in bridge

3038930

<https://www.phoenixcontact.com/pc/products/3038930>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, nominal current: 24 A, color: red

 Max. current carrying capacity: 20 A

FBSR 2-5 - Plug-in bridge

3033702

<https://www.phoenixcontact.com/pc/products/3033702>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, nominal current: 17.5 A, color: red

 Max. current carrying capacity: 17.5 A

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

FBSR 3-5 - Plug-in bridge

3001591

<https://www.phoenixcontact.com/pc/products/3001591>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, nominal current: 17.5 A, color: red

 Max. current carrying capacity: 17.5 A

FBSR 4-5 - Plug-in bridge

3001592

<https://www.phoenixcontact.com/pc/products/3001592>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, nominal current: 17.5 A, color: red

 Max. current carrying capacity: 17.5 A

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>

FBSR 5-5 - Plug-in bridge

3001593

<https://www.phoenixcontact.com/pc/products/3001593>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, nominal current: 17.5 A, color: red

 Max. current carrying capacity: 17.5 A

FBSR 10-5 - Plug-in bridge

3033710

<https://www.phoenixcontact.com/pc/products/3033710>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, nominal current: 17.5 A, color: red

 Max. current carrying capacity: 17.5 A

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



FBS 2-5 BU - Plug-in bridge

3036877

<https://www.phoenixcontact.com/pc/products/3036877>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, nominal current: 24 A, color: blue

 Max. current carrying capacity: 20 A

FBS 3-5 BU - Plug-in bridge

3036880

<https://www.phoenixcontact.com/pc/products/3036880>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, nominal current: 24 A, color: blue

 Max. current carrying capacity: 20 A

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

FBS 4-5 BU - Plug-in bridge

3036893

<https://www.phoenixcontact.com/pc/products/3036893>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, nominal current: 24 A, color: blue

 Max. current carrying capacity: 20 A

FBS 5-5 BU - Plug-in bridge

3036903

<https://www.phoenixcontact.com/pc/products/3036903>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, nominal current: 24 A, color: blue

 Max. current carrying capacity: 20 A

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



FBS 10-5 BU - Plug-in bridge

3036916

<https://www.phoenixcontact.com/pc/products/3036916>



Plug-in bridge, pitch: 5.2 mm, number of positions: 10, nominal current: 24 A, color: blue

 Max. current carrying capacity: 20 A

FBS 20-5 BU - Plug-in bridge

3036929

<https://www.phoenixcontact.com/pc/products/3036929>



Plug-in bridge, pitch: 5.2 mm, number of positions: 20, nominal current: 24 A, color: blue

 Max. current carrying capacity: 20 A

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



FBS 50-5 BU - Plug-in bridge

3032114

<https://www.phoenixcontact.com/pc/products/3032114>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, nominal current: 24 A, color: blue

 Max. current carrying capacity: 20 A

RB ST 10-(2,5/4) - Reducing bridge

3030873

<https://www.phoenixcontact.com/pc/products/3030873>



Reducing bridge, pitch: 10 mm, number of positions: 2, nominal current: 45 A, length: 36 mm, color: red

 Max. current carrying capacity: 35 A

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>

RB UT 10-(2,5/4) - Reducing bridge

3047060

<https://www.phoenixcontact.com/pc/products/3047060>



Reducing bridge, pitch: 10.2 mm, number of positions: 2, length: 29 mm, color: red

 Max. current carrying capacity: 40 A

RB UT 35-(2,5/4) - Reducing bridge

3047277

<https://www.phoenixcontact.com/pc/products/3047277>



Reducing bridge, pitch: 11 mm, number of positions: 2, color: red

 Max. current carrying capacity: 40 A

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



RB UT 16-(2,5/4) - Reducing bridge

3047073

<https://www.phoenixcontact.com/pc/products/3047073>



Reducing bridge, pitch: 11 mm, number of positions: 2, nominal current: 32 A, length: 31 mm, color: red

 Max. current carrying capacity: 40 A

RB UT 6-(2,5/4) - Reducing bridge

3047251

<https://www.phoenixcontact.com/pc/products/3047251>



Reducing bridge, pitch: 9.5 mm, number of positions: 2, length: 25 mm, color: red

 Max. current carrying capacity: 40 A

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



FBSW N 2-5/60MM - Wire bridge

1653820

<https://www.phoenixcontact.com/pc/products/1653820>

Wire bridge, number of positions: 1, nominal current: 17.5 A, length: 60 mm, color: red/black



 Max. current carrying capacity: 17.5 A

FBSW N 2-5/120MM - Wire bridge

1653821

<https://www.phoenixcontact.com/pc/products/1653821>

Wire bridge, number of positions: 1, nominal current: 17.5 A, length: 120 mm, color: red/black



 Max. current carrying capacity: 17.5 A

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



FBSW N 2-5/240MM - Wire bridge

1653822

<https://www.phoenixcontact.com/pc/products/1653822>

Wire bridge, number of positions: 1, nominal current: 17.5 A, length: 240 mm, color: red/black



 Max. current carrying capacity: 17.5 A

D-UT 2,5/4-TWIN - End cover

3047141

<https://www.phoenixcontact.com/pc/products/3047141>

End cover, depth: 39.8 mm, width: 2.2 mm, height: 56.8 mm, color: gray



UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



ATP-UT-TWIN - Partition plate

3047183

<https://www.phoenixcontact.com/pc/products/3047183>



P-CO XL-UT - Component connector

3036799

<https://www.phoenixcontact.com/pc/products/3036799>



UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



P-CO 2-5 R47K - Component connector

3032447

<https://www.phoenixcontact.com/pc/products/3032447>



LPO 2,5/E - Pick-off plug

3270516

<https://www.phoenixcontact.com/pc/products/3270516>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm² - 4 mm², color: gray

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

LPO 2,5 - Pick-off plug

3270517

<https://www.phoenixcontact.com/pc/products/3270517>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

LPS-5/E - Service connector

3270520

<https://www.phoenixcontact.com/pc/products/3270520>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



LPS-5 - Service connector

3270521

<https://www.phoenixcontact.com/pc/products/3270521>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

D-UT 2,5/4-TWIN BU - End cover

3047142

<https://www.phoenixcontact.com/pc/products/3047142>



End cover, depth: 47.5 mm, width: 2.2 mm, height: 57.8 mm, color: blue

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

P-FU 5X20-5 - Fuse plug

3209235

<https://www.phoenixcontact.com/pc/products/3209235>



Fuse plug, nom. voltage: 400 V, nominal current: 6.3 A, connection method: Plug-in connection, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

P-FU 5X20 LED 24-5 - Fuse plug

3209248

<https://www.phoenixcontact.com/pc/products/3209248>



Fuse plug, nom. voltage: 24 V, nominal current: 6.3 A, connection method: Plug-in connection, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

P-FU 5X20 LED 24-5 120KOHM - Fuse plug

3209240

<https://www.phoenixcontact.com/pc/products/3209240>



Fuse plug, nom. voltage: 24 V, nominal current: 6.3 A, fuse type: G / 5 x 20, color: black

P-FU 5X20 LED 60-5 - Fuse plug

3209251

<https://www.phoenixcontact.com/pc/products/3209251>



Fuse plug, nom. voltage: 250 V, nominal current: 6.3 A, connection method: Plug-in connection, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



P-FU 5X20 LED 250-5 - Fuse plug

3209264

<https://www.phoenixcontact.com/pc/products/3209264>



Fuse plug, nom. voltage: 250 V, nominal current: 6.3 A, connection method: Plug-in connection, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/pc/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/pc/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/pc/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/pc/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/pc/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/pc/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/pc/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/pc/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/pc/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/pc/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/pc/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: white

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/pc/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/pc/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/pc/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/pc/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/pc/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/pc/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver-colored

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/pc/products/1050004>



Zack marker strip, Strip, white (RAL 9010), unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.1 mm

ZB 5 CUS - Zack marker strip

0824962

<https://www.phoenixcontact.com/pc/products/0824962>



Zack marker strip, can be ordered: Strip, white (RAL 9010), labeled according to customer specifications, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

<https://www.phoenixcontact.com/pc/products/1050017>



Zack marker strip, Strip, white (RAL 9010), labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

ZB 5,QR:FORTL.ZAHLEN - Zack marker strip

1050020

<https://www.phoenixcontact.com/pc/products/1050020>



Zack marker strip, Strip, white (RAL 9010), Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



ZB 5,LGS:GLEICHE ZAHLEN - Zack marker strip

1050033

<https://www.phoenixcontact.com/pc/products/1050033>



Zack marker strip, Strip, white (RAL 9010), labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

<https://www.phoenixcontact.com/pc/products/1050415>



Zack marker strip, Strip, white (RAL 9010), labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



UC-TM 5 - Marker for terminal blocks

0818108

<https://www.phoenixcontact.com/pc/products/0818108>



Marker for terminal blocks, Sheet, white (RAL 9010), unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 96, text field height: 10.5 mm, text field width: 4.6 mm

UC-TM 5 CUS - Marker for terminal blocks

0824581

<https://www.phoenixcontact.com/pc/products/0824581>



Marker for terminal blocks, can be ordered: by sheet, white (RAL 9010), labeled according to customer specifications, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 96, text field height: 4.6 mm, text field width: 10.5 mm

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



UCT-TM 5 - Marker for terminal blocks

0828734

<https://www.phoenixcontact.com/pc/products/0828734>



Marker for terminal blocks, Sheet, white (RAL 9010), unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 72, text field height: 10.5 mm, text field width: 4.6 mm

UCT-TM 5 CUS - Marker for terminal blocks

0829595

<https://www.phoenixcontact.com/pc/products/0829595>



Marker for terminal blocks, Sheet, can be ordered: by sheet, white (RAL 9010), labeled according to customer specifications, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 72, text field height: 10.5 mm, text field width: 4.6 mm

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/pc/products/0201744>



Test plug, with solder connection up to 1 mm² conductor cross-section, number of positions: 1, color: gray

MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/pc/products/0201663>

Insulating sleeve, color: white



UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/pc/products/0201676>

Insulating sleeve, color: red




MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/pc/products/0201689>

Insulating sleeve, color: blue



UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/pc/products/0201692>

Insulating sleeve, color: yellow



MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/pc/products/0201702>

Insulating sleeve, color: green



UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/pc/products/0201728>

Insulating sleeve, color: gray



MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/pc/products/0201731>

Insulating sleeve, color: black



UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



PAI-4-FIX-5/6 BU - Test adapter

3035975

<https://www.phoenixcontact.com/pc/products/3035975>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 OG - Test adapter

3035974

<https://www.phoenixcontact.com/pc/products/3035974>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



PAI-4-FIX-5/6 YE - Test adapter

3035977

<https://www.phoenixcontact.com/pc/products/3035977>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 RD - Test adapter

3035976

<https://www.phoenixcontact.com/pc/products/3035976>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



PAI-4-FIX-5/6 GN - Test adapter

3035978

<https://www.phoenixcontact.com/pc/products/3035978>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 BK - Test adapter

3035980

<https://www.phoenixcontact.com/pc/products/3035980>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



PAI-4-FIX-5/6 GY - Test adapter

3035982

<https://www.phoenixcontact.com/pc/products/3035982>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 VT - Test adapter

3035979

<https://www.phoenixcontact.com/pc/products/3035979>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



PAI-4-FIX-5/6 BN - Test adapter

3035981

<https://www.phoenixcontact.com/pc/products/3035981>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

PAI-4-FIX-5/6 WH - Test adapter

3035983

<https://www.phoenixcontact.com/pc/products/3035983>



4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



PS-5 - Test plug

3030983

<https://www.phoenixcontact.com/pc/products/3030983>

Test plug, Modular test plug, number of positions: 1, color: red



DP PS-5 - Spacer plate

3036725

<https://www.phoenixcontact.com/pc/products/3036725>

Spacer plate, depth: 29 mm, width: 5.2 mm, height: 22.4 mm, number of positions: 1, color: red



UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



PS-5/2,3MM RD - Test plug

3038723

<https://www.phoenixcontact.com/pc/products/3038723>



Test plug, number of positions: 1, color: red

P-DI - Isolating plug

3036783

<https://www.phoenixcontact.com/pc/products/3036783>



UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



P-DI GY - Isolating plug

3047390

<https://www.phoenixcontact.com/pc/products/3047390>



P-DI GN - Isolating plug

1071062

<https://www.phoenixcontact.com/pc/products/1071062>



UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



P-DI-MP WH - Isolating plug

1799818

<https://www.phoenixcontact.com/pc/products/1799818>



P-FIX - Feed-through connector

3038956

<https://www.phoenixcontact.com/pc/products/3038956>



UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



P-CO - Component connector

3036796

<https://www.phoenixcontact.com/pc/products/3036796>



P-CO 1N4007/R-L - Component connector

3032457

<https://www.phoenixcontact.com/pc/products/3032457>



UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



P-CO 1N4007/L-R - Component connector

3032460

<https://www.phoenixcontact.com/pc/products/3032460>



P-CO XL - Component connector

3036797

<https://www.phoenixcontact.com/pc/products/3036797>



UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



P-CO XL SKN - Component connector

3036798

<https://www.phoenixcontact.com/pc/products/3036798>



P-CO L - Component connector

1782755

<https://www.phoenixcontact.com/pc/products/1782755>



UT 2,5-TG - Disconnect terminal block



3046388

<https://www.phoenixcontact.com/pc/products/3046388>

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/pc/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/pc/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>




E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/pc/products/0800886>

End clamp, width: 9.5 mm, color: gray



P-FU 5X20 LED 24 - Fuse plug

3036819

<https://www.phoenixcontact.com/pc/products/3036819>

Fuse plug, nom. voltage: 24 V, nominal current: 6.3 A, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black



UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



P-FU 5X20 LED 60 - Fuse plug

3036822

<https://www.phoenixcontact.com/pc/products/3036822>



Fuse plug, nom. voltage: 500 V, nominal current: 6.3 A, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

P-FU 5X20 LA 250 - Fuse plug

3036835

<https://www.phoenixcontact.com/pc/products/3036835>



Fuse plug, nom. voltage: 500 V, nominal current: 6.3 A, fuse type: G / 5 x 20, mounting type: Plug-in mounting, color: black

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/pc/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/pc/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

UT 2,5-TG - Disconnect terminal block

3046388

<https://www.phoenixcontact.com/pc/products/3046388>



SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/pc/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com