

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20, nom. voltage: 500 V, nominal current: 6.3 A, connection method: Screw connection, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup>- 6 mm<sup>2</sup>, mounting type: NS 35/7,5, NS 35/15, color: black

## Your advantages

- Globally recognized: Internationally proven screw connection
- Maintenance-free and vibration-resistant thanks to the patented Reakdyn principle
- Easy integration and replacement of fuses with the lever element
- Easy checking of the fuses with integrated test pick-offs
- Long-term stable connections with the use of high-quality materials
- Long-term stable connections with the use of high-quality materials
- Maximum efficiency in the smallest space - thanks to integrated level bridging, the connections are connected across levels

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 3046032       |
| Packing unit                         | 50 pc         |
| Minimum order quantity               | 50 pc         |
| Product key                          | BE1134        |
| GTIN                                 | 4017918956578 |
| Weight per piece (including packing) | 16.86 g       |
| Weight per piece (excluding packing) | 16.168 g      |
| Customs tariff number                | 85369095      |
| Country of origin                    | DE            |

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## Technical data

### Notes

|                    |                                    |
|--------------------|------------------------------------|
| Order information: | Fuse-link not supplied as standard |
|--------------------|------------------------------------|

### Product properties

|                       |                     |
|-----------------------|---------------------|
| Product type          | Fuse terminal block |
| Product family        | UT                  |
| Area of application   | Railway industry    |
|                       | Machine building    |
|                       | Plant engineering   |
| Number of connections | 2                   |
| Number of rows        | 1                   |
| Potentials            | 1                   |

### Insulation characteristics

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution  | 3   |

### Electrical properties

|                                                 |                                                                                                              |
|-------------------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Fuse type                                       | Glass / ceramics / ...                                                                                       |
| Rated surge voltage                             | 6 kV                                                                                                         |
| Maximum power dissipation for nominal condition | 1.02 W                                                                                                       |
| Fuse                                            | G / 5 x 20                                                                                                   |
| Maximum power dissipation                       | max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload)                     |
|                                                 | max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload)        |
|                                                 | max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit)                |
|                                                 | max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit) |

### Connection data

|                                  |                                            |
|----------------------------------|--------------------------------------------|
| Number of connections per level  | 2                                          |
| Nominal cross section            | 4 mm <sup>2</sup>                          |
| Connection method                | Screw connection                           |
| Screw thread                     | M3                                         |
| Tightening torque                | 0.6 ... 0.8 Nm                             |
| Stripping length                 | 9 mm                                       |
| Internal cylindrical gage        | A4                                         |
| Connection in acc. with standard | IEC 60947-7-3                              |
| Conductor cross-section rigid    | 0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup> |
| Cross section AWG                | 26 ... 10 (converted acc. to IEC)          |
| Conductor cross-section flexible | 0.14 mm <sup>2</sup> ... 6 mm <sup>2</sup> |

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

|                                                                                           |                                                                       |
|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| Conductor cross-section, flexible [AWG]                                                   | 26 ... 10 (converted acc. to IEC)                                     |
| Conductor cross-section flexible ultrasound-compressed                                    | 0.34 mm <sup>2</sup> ... 6 mm <sup>2</sup>                            |
| Conductor cross-section, flexible [AWG] ultrasound-compressed                             | 22 ... 10 (converted acc. to IEC)                                     |
| Conductor cross-section flexible (ferrule without plastic sleeve)                         | 0.25 mm <sup>2</sup> ... 4 mm <sup>2</sup>                            |
| Flexible conductor cross-section (ferrule with plastic sleeve)                            | 0.14 mm <sup>2</sup> ... 4 mm <sup>2</sup>                            |
| 2 conductors with same cross section, rigid                                               | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                          |
| 2 conductors with same cross section, flexible                                            | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                          |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve       | 0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                          |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>                           |
| Nominal cross section                                                                     | 4 mm <sup>2</sup>                                                     |
| Nominal current                                                                           | 6.3 A                                                                 |
| Maximum load current                                                                      | 6.3 A (the current is determined by the fuse used)                    |
| Nominal voltage                                                                           | 500 V (The voltage is determined by the fuse or selected LED display) |

## Dimensions

|                    |         |
|--------------------|---------|
| Width              | 6.2 mm  |
| Height             | 57.8 mm |
| Depth on NS 35/7,5 | 75.6 mm |
| Depth on NS 35/15  | 83.1 mm |

## Material specifications

|                                                                         |                  |
|-------------------------------------------------------------------------|------------------|
| Color                                                                   | black (RAL 9005) |
| Flammability rating according to UL 94                                  | V0               |
| Insulating material group                                               | I                |
| Insulating material                                                     | PA               |
| Static insulating material application in cold                          | -60 °C           |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 125 °C           |
| Relative insulation material temperature index (Elec., UL 746 B)        | 130 °C           |
| Fire protection for rail vehicles (DIN EN 45545-2) R22                  | HL 1 - HL 3      |
| Fire protection for rail vehicles (DIN EN 45545-2) R23                  | HL 1 - HL 3      |
| Fire protection for rail vehicles (DIN EN 45545-2) R24                  | HL 1 - HL 3      |
| Fire protection for rail vehicles (DIN EN 45545-2) R26                  | HL 1 - HL 3      |
| Calorimetric heat release NFPA 130 (ASTM E 1354)                        | 27,5 MJ/kg       |
| Surface flammability NFPA 130 (ASTM E 162)                              | passed           |
| Specific optical density of smoke NFPA 130 (ASTM E 662)                 | passed           |
| Smoke gas toxicity NFPA 130 (SMP 800C)                                  | passed           |

## Electrical tests

### Surge voltage test

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 7.3 kV      |
| Result                | Test passed |

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## Temperature-rise test

|                                   |                                     |
|-----------------------------------|-------------------------------------|
| Requirement temperature-rise test | Increase in temperature $\leq 45$ K |
| Result                            | Test passed                         |
| Result                            | Test passed                         |

## Power-frequency withstand voltage

|                       |             |
|-----------------------|-------------|
| Test voltage setpoint | 1.89 kV     |
| Result                | Test passed |

## Mechanical properties

### Mechanical data

|                 |    |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

## Mechanical tests

### Mechanical strength

|        |             |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

### Attachment on the carrier

|        |             |
|--------|-------------|
| Result | Test passed |
|--------|-------------|

### Test for conductor damage and slackening

|                                |                               |
|--------------------------------|-------------------------------|
| Rotation speed                 | 10 (+/- 2) rpm                |
| Revolutions                    | 135                           |
| Conductor cross-section/weight | 0.14 mm <sup>2</sup> / 0.2 kg |
|                                | 4 mm <sup>2</sup> / 0.9 kg    |
|                                | 6 mm <sup>2</sup> / 1.4 kg    |
| Result                         | Test passed                   |

## Environmental and real-life conditions

### Needle-flame test

|                  |             |
|------------------|-------------|
| Time of exposure | 30 s        |
| Result           | Test passed |

### Oscillation/broadband noise

|                        |                                                  |
|------------------------|--------------------------------------------------|
| Specification          | DIN EN 50155 (VDE 0115-200):2008-03              |
| Spectrum               | Long life test category 1, class B, body mounted |
| Frequency              | $f_1 = 5$ Hz to $f_2 = 150$ Hz                   |
| ASD level              | 1.857 (m/s <sup>2</sup> ) <sup>2</sup> /Hz       |
| Acceleration           | 0.8g                                             |
| Test duration per axis | 5 h                                              |
| Test directions        | X-, Y- and Z-axis                                |
| Result                 | Test passed                                      |

### Shocks

|               |                                     |
|---------------|-------------------------------------|
| Specification | DIN EN 50155 (VDE 0115-200):2008-03 |
|---------------|-------------------------------------|

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

|                                |                                   |
|--------------------------------|-----------------------------------|
| Pulse shape                    | Semi-sinusoidal                   |
| Acceleration                   | 5g                                |
| Shock duration                 | 30 ms                             |
| Number of shocks per direction | 3                                 |
| Test directions                | X-, Y- and Z-axis (pos. and neg.) |
| Result                         | Test passed                       |

## Ambient conditions

|                                          |                                                                                                                              |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Ambient temperature (operation)          | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport)  | -25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)                                                    |
| Ambient temperature (assembly)           | -5 °C ... 70 °C                                                                                                              |
| Ambient temperature (actuation)          | -5 °C ... 70 °C                                                                                                              |
| Permissible humidity (operation)         | 20 % ... 90 %                                                                                                                |
| Permissible humidity (storage/transport) | 30 % ... 70 %                                                                                                                |

## Standards and regulations

|                                  |               |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-3 |
|----------------------------------|---------------|

## Mounting

|               |           |
|---------------|-----------|
| Mounting type | NS 35/7,5 |
|               | NS 35/15  |


# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## Drawings

Application drawing

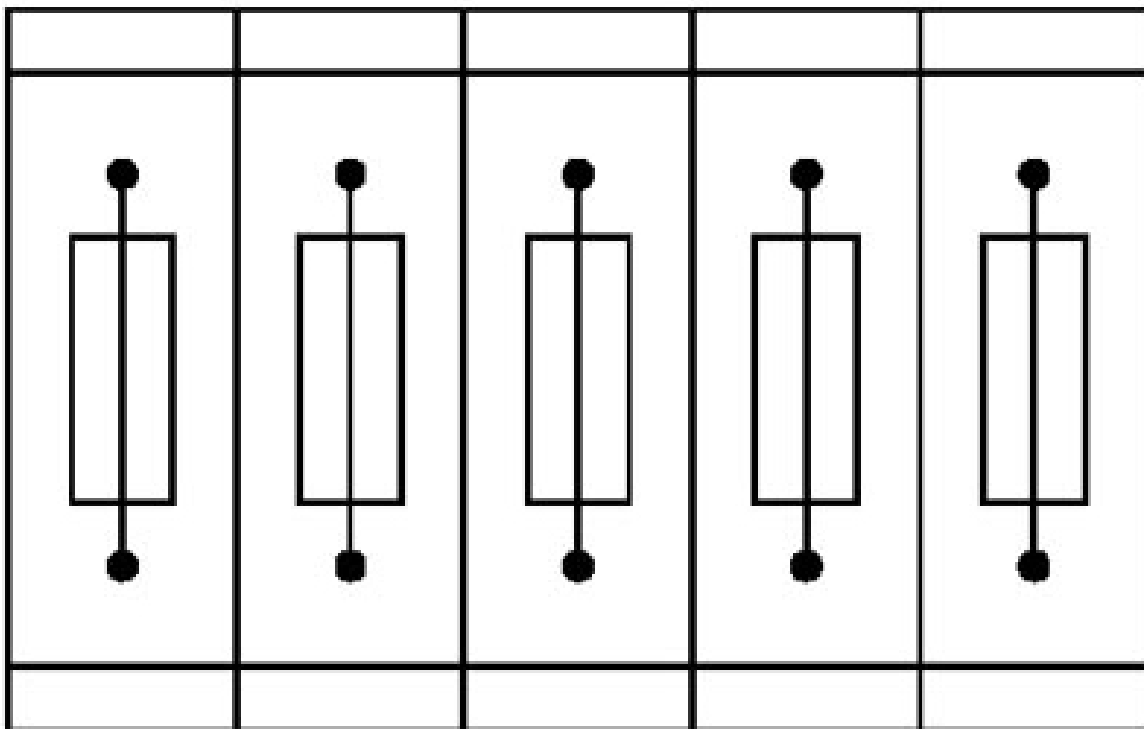

Fuse terminal blocks in interconnected arrangement,  
block consisting of 5 fuse terminal blocks

# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>

Application drawing




Fuse terminal block in single arrangement,  
block consisting of one fuse terminal block and 4 feed-through terminal blocks

# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>

Circuit diagram

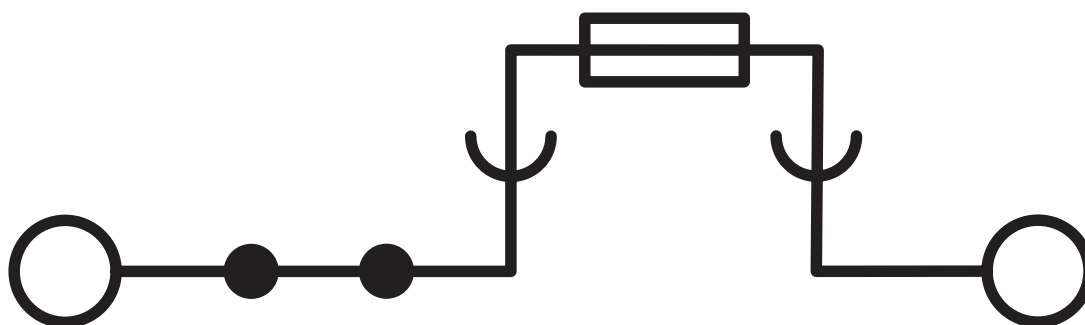

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/3046032>

### DNV

Approval ID: TAE00001S9



### CSA

Approval ID: 13631



### IECEE CB Scheme

Approval ID: NL-65056

|       | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|-------|-----------------------|-----------------------|-------------------|-----------------------------|
| keine |                       |                       |                   |                             |
|       | 500 V                 | 6.3 A                 | -                 | 0.14 - 4                    |



### EAC

Approval ID: KZ7500651131219505



### cULus Recognized

Approval ID: E60425

|                            | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|----------------------------|-----------------------|-----------------------|-------------------|-----------------------------|
| B                          |                       |                       |                   |                             |
|                            | 600 V                 | 10 A                  | 26 - 10           | -                           |
| Multi-conductor connection | 600 V                 | 10 A                  | 26 - 14           | -                           |
| C                          |                       |                       |                   |                             |
|                            | 600 V                 | 10 A                  | 26 - 10           | -                           |
| Multi-conductor connection | 600 V                 | 10 A                  | 26 - 14           | -                           |



### KEMA-KEUR

Approval ID: 71-113330

|       | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|-------|-----------------------|-----------------------|-------------------|-----------------------------|
| keine |                       |                       |                   |                             |
|       | 500 V                 | 6.3 A                 | -                 | 0.14 - 4                    |



### LR

Approval ID: LR24100022TA

# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



**CSA**

Approval ID: 13631

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27250113 |
| ECLASS-15.0 | 27250113 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC000899 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## Environmental product compliance

### EU RoHS

|                                         |      |
|-----------------------------------------|------|
| Fulfills EU RoHS substance requirements | Yes  |
| Exemption                               | 6(c) |

### China RoHS

|                                        |                                                                                                                                                                                                                                   |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment friendly use period (EFUP) | EFUP-50                                                                                                                                                                                                                           |
|                                        | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

### EU REACH SVHC

|                                     |                                      |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1)                 |
| SCIP                                | 8647fab7-370d-40c0-a0c1-f862e400409c |

### EF3.1 Climate Change

|         |               |
|---------|---------------|
| CO2e kg | 0.188 kg CO2e |
|---------|---------------|

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## Accessories



Note: Applying some accessories below might limit this product.

### FBS 2-6 - Plug-in bridge

3030336

<https://www.phoenixcontact.com/pc/products/3030336>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, nominal current: 32 A, color: red



Max. current carrying capacity: 32 A

### FBS 3-6 - Plug-in bridge

3030242

<https://www.phoenixcontact.com/pc/products/3030242>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, nominal current: 32 A, color: red



Max. current carrying capacity: 32 A

# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## FBS 4-6 - Plug-in bridge

3030255

<https://www.phoenixcontact.com/pc/products/3030255>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, nominal current: 32 A, color: red

 Max. current carrying capacity: 32 A

---

## FBS 5-6 - Plug-in bridge

3030349

<https://www.phoenixcontact.com/pc/products/3030349>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, nominal current: 32 A, color: red

 Max. current carrying capacity: 32 A

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## FBS 6-6 - Plug-in bridge

1008238

<https://www.phoenixcontact.com/pc/products/1008238>



Plug-in bridge, One side not fully isolated, pitch: 6.2 mm, number of positions: 6, nominal current: 32 A, color: red

 Max. current carrying capacity: 32 A

---

## FBS 10-6 - Plug-in bridge

3030271

<https://www.phoenixcontact.com/pc/products/3030271>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, nominal current: 32 A, color: red

 Max. current carrying capacity: 32 A

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## FBS 20-6 - Plug-in bridge

3030365

<https://www.phoenixcontact.com/pc/products/3030365>



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, nominal current: 32 A, color: red

 Max. current carrying capacity: 32 A

---

## FBS 50-6 - Plug-in bridge

3032224

<https://www.phoenixcontact.com/pc/products/3032224>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, nominal current: 32 A, color: red

 Max. current carrying capacity: 32 A

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## FBSR 2-6 - Plug-in bridge

3033715

<https://www.phoenixcontact.com/pc/products/3033715>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, nominal current: 24 A, color: red

 Max. current carrying capacity: 24 A

---

## FBSR 3-6 - Plug-in bridge

3001594

<https://www.phoenixcontact.com/pc/products/3001594>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, nominal current: 24 A, color: red

 Max. current carrying capacity: 24 A

# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## FBSR 4-6 - Plug-in bridge

3001595

<https://www.phoenixcontact.com/pc/products/3001595>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, nominal current: 24 A, color: red

 Max. current carrying capacity: 24 A

---

## FBSR 5-6 - Plug-in bridge

3001596

<https://www.phoenixcontact.com/pc/products/3001596>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, nominal current: 24 A, color: red

 Max. current carrying capacity: 24 A

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## FBSR 10-6 - Plug-in bridge

3033716

<https://www.phoenixcontact.com/pc/products/3033716>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, nominal current: 24 A, color: red

 Max. current carrying capacity: 24 A

---

## FBSRH 2-6 - Short-circuit connector

3033812

<https://www.phoenixcontact.com/pc/products/3033812>



Short-circuit connector, pitch: 6.2 mm, number of positions: 2, nominal current: 24 A, color: red

 Max. current carrying capacity: 24 A

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## FBS 2-6 BU - Plug-in bridge

3036932

<https://www.phoenixcontact.com/pc/products/3036932>



Plug-in bridge, pitch: 6.2 mm, number of positions: 2, nominal current: 32 A, color: blue

 Max. current carrying capacity: 32 A

---

## FBS 3-6 BU - Plug-in bridge

3036945

<https://www.phoenixcontact.com/pc/products/3036945>



Plug-in bridge, pitch: 6.2 mm, number of positions: 3, nominal current: 32 A, color: blue

 Max. current carrying capacity: 32 A

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## FBS 4-6 BU - Plug-in bridge

3036958

<https://www.phoenixcontact.com/pc/products/3036958>



Plug-in bridge, pitch: 6.2 mm, number of positions: 4, nominal current: 32 A, color: blue

 Max. current carrying capacity: 32 A

---

## FBS 5-6 BU - Plug-in bridge

3036961

<https://www.phoenixcontact.com/pc/products/3036961>



Plug-in bridge, pitch: 6.2 mm, number of positions: 5, nominal current: 32 A, color: blue

 Max. current carrying capacity: 32 A

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## FBS 10-6 BU - Plug-in bridge

3032198

<https://www.phoenixcontact.com/pc/products/3032198>



Plug-in bridge, pitch: 6.2 mm, number of positions: 10, nominal current: 32 A, color: blue


 Max. current carrying capacity: 32 A

---

## FBS 20-6 BU - Plug-in bridge

3032208

<https://www.phoenixcontact.com/pc/products/3032208>



Plug-in bridge, pitch: 6.2 mm, number of positions: 20, nominal current: 32 A, color: blue

 Max. current carrying capacity: 32 A

## UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



## FBS 50-6 BU - Plug-in bridge

3032211

<https://www.phoenixcontact.com/pc/products/3032211>



Plug-in bridge, pitch: 6.2 mm, number of positions: 50, nominal current: 32 A, color: blue

 Max. current carrying capacity: 32 A

---

## DMET 5X20 - Feed-through connector

3032075

<https://www.phoenixcontact.com/pc/products/3032075>



Feed-through metal in the shape of a 5 x 20 mm glass tube fuse insert for use in fuse terminal blocks.

# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/pc/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

---

## NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/pc/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



## NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/pc/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

---

## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/pc/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/pc/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

---

## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/pc/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/pc/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

---

## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/pc/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

## UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



### NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/pc/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

---

### NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/pc/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver-colored

# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



## NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/pc/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: white

---

## NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/pc/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, galvanized, white passivated, Standard profile, color: silver-colored

## UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



### NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/pc/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver-colored

---

### NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/pc/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



## NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/pc/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, zinc plating, Standard profile, color: silver-colored

---

## NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/pc/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

## UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



## NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/pc/products/1201798>




DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver-colored

---

## ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/pc/products/1050004>



Zack marker strip, Strip, white (RAL 9010), unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.1 mm

## UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



## ZB 5 CUS - Zack marker strip

0824962

<https://www.phoenixcontact.com/pc/products/0824962>



Zack marker strip, can be ordered: Strip, white (RAL 9010), labeled according to customer specifications, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

---

## ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

<https://www.phoenixcontact.com/pc/products/1050017>



Zack marker strip, Strip, white (RAL 9010), labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## ZB 5,QR:FORTL.ZAHLEN - Zack marker strip

1050020

<https://www.phoenixcontact.com/pc/products/1050020>



Zack marker strip, Strip, white (RAL 9010), Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

---

## ZB 5,LGS:GLEICHE ZAHLEN - Zack marker strip

1050033

<https://www.phoenixcontact.com/pc/products/1050033>



Zack marker strip, Strip, white (RAL 9010), labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

<https://www.phoenixcontact.com/pc/products/1050415>



Zack marker strip, Strip, white (RAL 9010), labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 5.15 mm

---

## UC-TM 5 - Marker for terminal blocks

0818108

<https://www.phoenixcontact.com/pc/products/0818108>



Marker for terminal blocks, Sheet, white (RAL 9010), unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 96, text field height: 10.5 mm, text field width: 4.6 mm

## UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>

### UC-TM 5 CUS - Marker for terminal blocks

0824581

<https://www.phoenixcontact.com/pc/products/0824581>



Marker for terminal blocks, can be ordered: by sheet, white (RAL 9010), labeled according to customer specifications, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 96, text field height: 4.6 mm, text field width: 10.5 mm

---

### UCT-TM 5 - Marker for terminal blocks

0828734

<https://www.phoenixcontact.com/pc/products/0828734>



Marker for terminal blocks, Sheet, white (RAL 9010), unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 72, text field height: 10.5 mm, text field width: 4.6 mm

## UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



## UCT-TM 5 CUS - Marker for terminal blocks

0829595

<https://www.phoenixcontact.com/pc/products/0829595>



Marker for terminal blocks, Sheet, can be ordered: by sheet, white (RAL 9010), labeled according to customer specifications, mounting type: latching, for terminal block width: 5.2 mm, Number of individual labels: 72, text field height: 10.5 mm, text field width: 4.6 mm

---

## ZB 6:UNBEDRUCKT - Zack marker strip

1051003

<https://www.phoenixcontact.com/pc/products/1051003>



Zack marker strip, Strip, white (RAL 9010), unmarked, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

## UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>

### ZB 6 CUS - Zack marker strip

0824992

<https://www.phoenixcontact.com/pc/products/0824992>



Zack marker strip, can be ordered: Strip, white (RAL 9010), labeled according to customer specifications, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

---

### ZB 6,LGS:FORTL.ZAHLEN - Zack marker strip

1051016

<https://www.phoenixcontact.com/pc/products/1051016>



Zack marker strip, Strip, white (RAL 9010), labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## ZB 6,QR:FORTL.ZAHLEN - Zack marker strip

1051029

<https://www.phoenixcontact.com/pc/products/1051029>



Zack marker strip, Strip, white (RAL 9010), labeled, can be labeled with: CMS-P1-PLOTTER, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

---

## ZB 6,LGS:GLEICHE ZAHLEN - Zack marker strip

1051032

<https://www.phoenixcontact.com/pc/products/1051032>



Zack marker strip, Strip, white (RAL 9010), labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## ZB 6,LGS:L1-N,PE - Marker for terminal blocks

1051414

<https://www.phoenixcontact.com/pc/products/1051414>



Marker for terminal blocks, Strip, white (RAL 9010), labeled, can be labeled with: CMS-P1-PLOTTER, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

---

## ZB 6,LGS:U-N - Marker for terminal blocks

1051430

<https://www.phoenixcontact.com/pc/products/1051430>



Marker for terminal blocks, Strip, white (RAL 9010), labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: U, V, W, N, GND, U, V, W, N, GND, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 10, text field height: 10.5 mm, text field width: 6.15 mm

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## UC-TM 6 - Marker for terminal blocks

0818085

<https://www.phoenixcontact.com/pc/products/0818085>



Marker for terminal blocks, Sheet, white (RAL 9010), unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 80, text field height: 10.5 mm, text field width: 5.6 mm

---

## UC-TM 6 CUS - Marker for terminal blocks

0824589

<https://www.phoenixcontact.com/pc/products/0824589>



Marker for terminal blocks, can be ordered: by sheet, white (RAL 9010), labeled according to customer specifications, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 80, text field height: 10.5 mm, text field width: 5.6 mm

## UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

### UCT-TM 6 - Marker for terminal blocks

0828736

<https://www.phoenixcontact.com/pc/products/0828736>



Marker for terminal blocks, Sheet, white (RAL 9010), unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 60, text field height: 10.5 mm, text field width: 5.6 mm

---

### UCT-TM 6 CUS - Marker for terminal blocks

0829602

<https://www.phoenixcontact.com/pc/products/0829602>



Marker for terminal blocks, Sheet, can be ordered: by sheet, white (RAL 9010), labeled according to customer specifications, mounting type: latching, for terminal block width: 6.2 mm, Number of individual labels: 60, text field height: 10.5 mm, text field width: 5.6 mm

# UT 4-HESI (5X20) - Fuse modular terminal block



3046032

<https://www.phoenixcontact.com/pc/products/3046032>

## CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/pc/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

---

## CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/pc/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

# UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>




## E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/pc/products/0800886>

End clamp, width: 9.5 mm, color: gray



---

## SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/pc/products/1205053>

Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip



## UT 4-HESI (5X20) - Fuse modular terminal block

3046032

<https://www.phoenixcontact.com/pc/products/3046032>



## X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/pc/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

---

## SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/pc/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

Phoenix Contact 2026 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)