

# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable



1696978

<https://www.phoenixcontact.com/pc/products/1696978>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 3-position, PUR halogen-free, black-gray RAL 7021, Plug straight M8, coding: A, on Socket straight M8, coding: A, cable length: 1 m

## Your advantages

- Easy and safe: 100 % electrically tested plug-in components

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1696978       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | 02            |
| Product key                          | AF1BBA        |
| GTIN                                 | 4017918593506 |
| Weight per piece (including packing) | 28.08 g       |
| Weight per piece (excluding packing) | 25.67 g       |
| Customs tariff number                | 85444290      |
| Country of origin                    | DE            |

# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable



1696978

<https://www.phoenixcontact.com/pc/products/1696978>

## Technical data

### Product properties

|                      |                       |
|----------------------|-----------------------|
| Product type         | Sensor/actuator cable |
| Application          | Standard              |
| Number of positions  | 3                     |
| No. of cable outlets | 1                     |
| Shielded             | no                    |
| Coding               | A                     |

### Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution  | 3  |

### Material specifications

|                                        |                                             |
|----------------------------------------|---------------------------------------------|
| Flammability rating according to UL 94 | HB                                          |
| Seal material                          | NBR                                         |
| Material of grip body                  | TPU, hardly inflammable, self-extinguishing |
| Contact material                       | CuSn                                        |
| Contact surface material               | Ni/Au                                       |
| Contact carrier material               | TPU GF                                      |
| Material for screw connection          | Zinc die-cast, nickel-plated                |

### Electrical properties

|                       |                            |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 48 V AC                    |
|                       | 60 V DC                    |
| Nominal current $I_N$ | 4 A                        |

### Mechanical properties

#### Mechanical data

|                             |            |
|-----------------------------|------------|
| Insertion/withdrawal cycles | $\geq 100$ |
|-----------------------------|------------|

### Signaling

|                        |    |
|------------------------|----|
| Status display         | no |
| Status display present | no |

### Connection data

#### Conductor connection

|                   |                        |
|-------------------|------------------------|
| Tightening torque | 0.2 Nm (M8 connectors) |
|-------------------|------------------------|

### Connector

#### Connection 1

# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable



1696978

<https://www.phoenixcontact.com/pc/products/1696978>

|                     |                  |
|---------------------|------------------|
| Type                | Plug straight M8 |
| Number of positions | 3                |
| Coding type         | A                |


## Connection 2

|                     |                    |
|---------------------|--------------------|
| Type                | Socket straight M8 |
| Number of positions | 3                  |
| Coding type         | A                  |

## Cable/line

|              |     |
|--------------|-----|
| Cable length | 1 m |
|--------------|-----|

## PUR halogen-free black [PUR]

|                                             |                                                                                     |
|---------------------------------------------|-------------------------------------------------------------------------------------|
| Dimensional drawing                         |  |
| Cable weight                                | 18 kg/km                                                                            |
| UL AWM Style                                | 20549 / 10493 (80°C/300 V)                                                          |
| Number of positions                         | 3                                                                                   |
| Shielded                                    | no                                                                                  |
| Cable type                                  | PUR halogen-free black [PUR]                                                        |
| Conductor structure signal line             | 32x 0.10 mm                                                                         |
| AWG signal line                             | 24                                                                                  |
| Conductor cross-section                     | 3x 0.25 mm² (Signal line)                                                           |
| Wire diameter incl. insulation              | 1.17 mm ±0.02 mm                                                                    |
| External cable diameter                     | 3.60 mm ±0.15 mm                                                                    |
| Outer sheath, material                      | PUR                                                                                 |
| External sheath, color                      | black-gray RAL 7021                                                                 |
| Conductor material                          | Bare Cu litz wires                                                                  |
| Material wire insulation                    | PP                                                                                  |
| Single wire, color                          | brown, blue, black                                                                  |
| Thickness, insulation                       | ≥ 0.21 mm (Core insulation)                                                         |
| Thickness, outer sheath                     | approx. 0.50 mm                                                                     |
| Overall twist                               | 3 wires, twisted                                                                    |
| Length of twist, overall twist              | 40 mm                                                                               |
| Max. conductor resistance                   | ≤ 78 Ω/km (at 20 °C)                                                                |
| Insulation resistance                       | ≥ 100 GΩ*km (at 20 °C)                                                              |
| Nominal voltage, cable                      | ≤ 300 V                                                                             |
| Test voltage                                | ≥ 3000 V                                                                            |
| Smallest bending radius, fixed installation | 18 mm                                                                               |

# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable



1696978

<https://www.phoenixcontact.com/pc/products/1696978>

|                                               |                                                                                                                                                                                           |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Smallest bending radius, movable installation | 36 mm                                                                                                                                                                                     |
| Dynamic load capacity (bending)               | Max. bending cycles: 10000000, Bending radius: 44 mm, Traversing path: 10 m, Traversing rate: 3 m/s, Acceleration: 10 m/s <sup>2</sup>                                                    |
| Dynamic load capacity (torsion)               | Torsion: $\pm 180^\circ/\text{m}$ , Torsion cycles: $\geq 5000000$ , Torsional frequency: 35 cycles/min.                                                                                  |
| Halogen-free                                  | in accordance with DIN VDE 0472 part 815                                                                                                                                                  |
| Flame resistance                              | in accordance with UL 758/1581 FT2<br>DIN EN 60332-2-2 (20 s)                                                                                                                             |
| Resistance to oil                             | in accordance with DIN EN 60811-2-1                                                                                                                                                       |
| Other resistance                              | hydrolysis and microbe resistant<br>Highly resistant to acids, alkaline solutions and solvents<br>Resistant to salt water<br>partly UV-resistant (in accordance with DIN EN ISO 4892-2-A) |
| Special properties                            | Flexible cable conduit capable<br>Silicone-free<br>Free of substances which would hinder coating with paint or varnish                                                                    |
| Ambient temperature (operation)               | -40 °C ... 80 °C (cable, fixed installation)<br>-25 °C ... 80 °C (Cable, flexible installation)                                                                                           |

## Environmental and real-life conditions

### Ambient conditions

|                                                                   |                                                |
|-------------------------------------------------------------------|------------------------------------------------|
| Degree of protection                                              | IP65<br>IP67<br>IP68                           |
| Ambient temperature (operation) (male connector/female connector) | -25 °C ... 90 °C (Plug / socket)               |
| Ambient temperature (operation) (Cable, fixed installation)       | -40 °C ... 80 °C (cable, fixed installation)   |
| Ambient temperature (operation) (Cable, flexible installation)    | -5 °C ... 80 °C (Cable, flexible installation) |

## Standards and regulations

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M8 connector    |
| Standards/specifications | IEC 61076-2-104 |


# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable

1696978

<https://www.phoenixcontact.com/pc/products/1696978>


## Drawings

Dimensional drawing

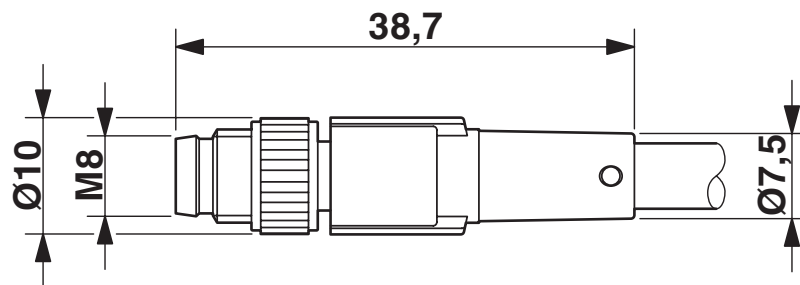

M8 x 1 male plug, straight version

Dimensional drawing

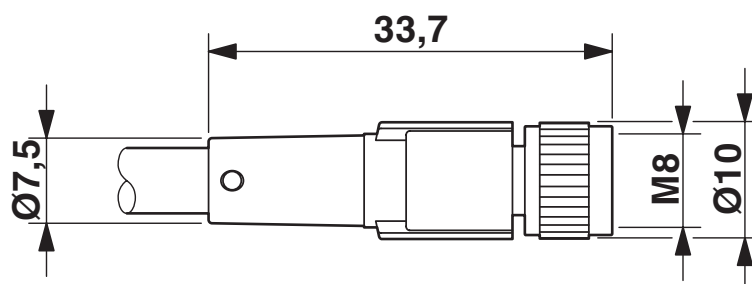


Socket M8 x 1, straight

# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable

1696978


<https://www.phoenixcontact.com/pc/products/1696978>

Schematic diagram

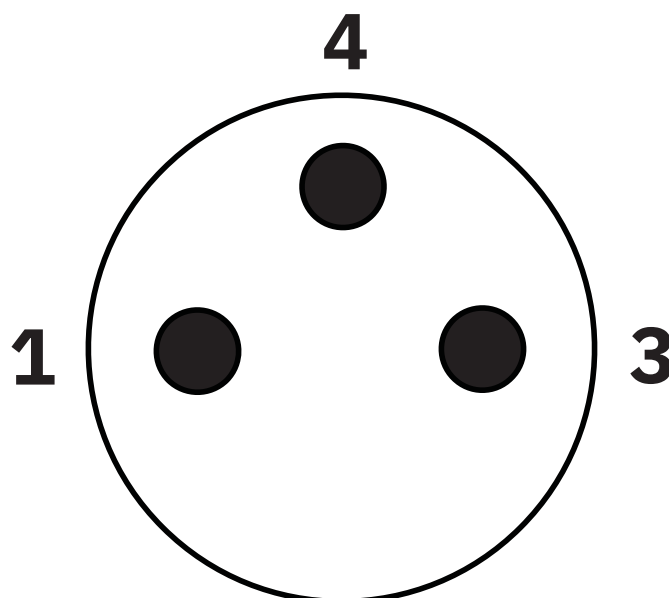

Pin assignment M8 plug, 3-pos., view male side

Schematic diagram

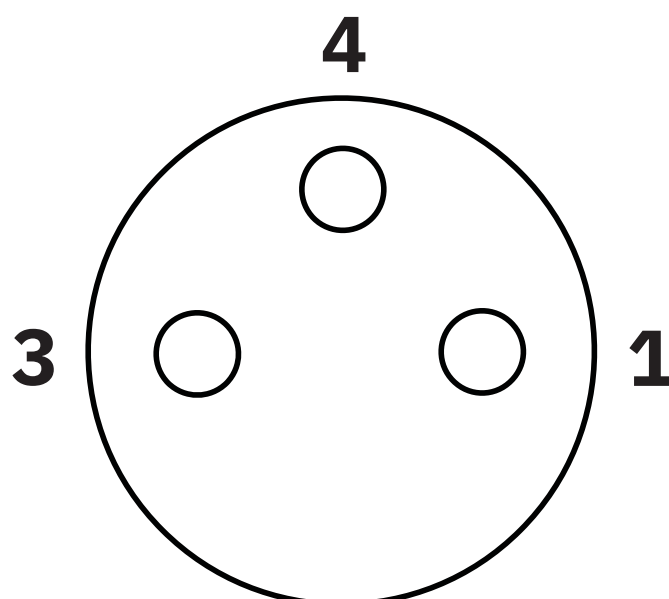

Pin assignment M8 socket, 3-pos., view female side


# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable



1696978

<https://www.phoenixcontact.com/pc/products/1696978>

Circuit diagram

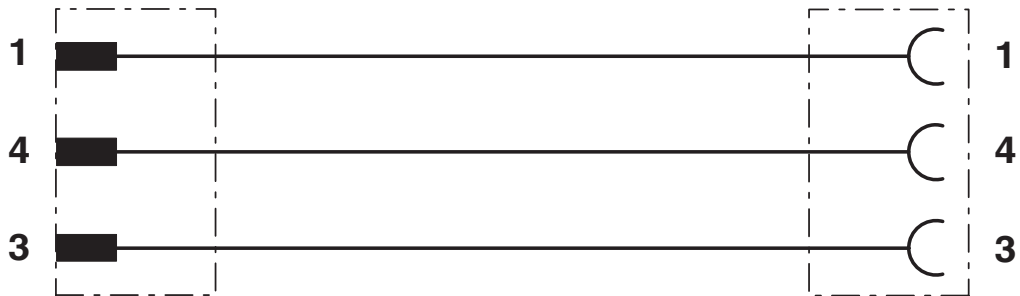

Contact assignment of M8 plugs/sockets

# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable



1696978

<https://www.phoenixcontact.com/pc/products/1696978>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/pc/products/1696978>



### UL Listed

Approval ID: FILE E 221474

|       | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|-------|-----------------------|-----------------------|-------------------|-----------------------------|
| keine |                       |                       |                   |                             |
|       | 60 V                  | 4 A                   | -                 | -                           |



### cUL Listed

Approval ID: FILE E 221474

|       | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|-------|-----------------------|-----------------------|-------------------|-----------------------------|
| keine |                       |                       |                   |                             |
|       | 60 V                  | 4 A                   | -                 | -                           |



### EAC-RoHS

Approval ID: RU D-DE.HB35.B.00387



# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable



1696978

<https://www.phoenixcontact.com/pc/products/1696978>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27060311 |
| ECLASS-15.0 | 27060311 |

### ETIM

|           |          |
|-----------|----------|
| ETIM 10.0 | EC001855 |
|-----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable



1696978  
<https://www.phoenixcontact.com/pc/products/1696978>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |
| EF3.1 Climate Change                    |                                          |
| CO2e kg                                 | 0.373 kg CO2e                            |

# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable



1696978

<https://www.phoenixcontact.com/pc/products/1696978>

## Accessories

### PROT-M 8 FS-PA-CHAIN - Sealing cap

1430857

<https://www.phoenixcontact.com/pc/products/1430857>

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 plugs



---

### UCT-WMT (23X4) - Conductor marker

0801453

<https://www.phoenixcontact.com/pc/products/0801453>



Conductor marker, Sheet, white (RAL 9010), unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, cable diameter range: 1.5 ... 35 mm, mounting type: insert, Number of individual labels: 30, text field height: 4 mm, text field width: 23 mm

# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable



1696978

<https://www.phoenixcontact.com/pc/products/1696978>

## UC-WMT (23X4) - Conductor marker

0819411

<https://www.phoenixcontact.com/pc/products/0819411>



Conductor marker, Sheet, white (RAL 9010), unmarked, can be labeled with: BLUEMARK E.CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, cable diameter range: 1.5 ... 35 mm, mounting type: insert, Number of individual labels: 24, text field height: 4 mm, text field width: 23 mm

---

## US-WMT (23X4) - Cable marker

0828769

<https://www.phoenixcontact.com/pc/products/0828769>



Cable marker, Card, white (RAL 9010), unmarked, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, THERMOMARK PRIME 2.0, cable diameter range: 1.5 ... 35 mm, mounting type: slide-on, Number of individual labels: 56, text field height: 4 mm, text field width: 23 mm

# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable



1696978

<https://www.phoenixcontact.com/pc/products/1696978>

## WMTW (23X4)R - Cable marker

0831004

<https://www.phoenixcontact.com/pc/products/0831004>



Cable marker, Roll, white (RAL 9010), unmarked, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, cable diameter range: 1.5 ... 35 mm, mounting type: insert, Number of individual labels: 3000, text field height: 4 mm, text field width: 23 mm

---

## PROT-M 8 MS-PA-CHAIN - Screw plug

1430860

<https://www.phoenixcontact.com/pc/products/1430860>

M8 sealing cap made of plastic with fixing band for sensor cables, for M8 sockets



# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable



1696978

<https://www.phoenixcontact.com/pc/products/1696978>

## B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/pc/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

## TSD 02 SAC - Torque screwdriver

1208487

<https://www.phoenixcontact.com/pc/products/1208487>



Torque screwdriver, with preset torque of 0.2 Nm and 4 mm hexagonal drive for M8 connectors

# SAC-3P-M 8MS/ 1,0-PUR/M 8FS - Sensor/actuator cable



1696978

<https://www.phoenixcontact.com/pc/products/1696978>

## SAC BIT M8-D10 - Tool

1208461

<https://www.phoenixcontact.com/pc/products/1208461>



Nut for assembling M8 connectors with longitudinal knurl and a knurl diameter of 10 mm, for 4 mm hexagonal drive

---

Phoenix Contact 2026 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)