

DRAWING NO
DW-H-2F(YG)-001

SHT. 2
OF
1 SHTS


© THIS COPYRIGHT OF THIS DRAWING IS RESERVED BY HONGSHANG. IT IS NOT COPIED, REPRODUCED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE CONSENT IN WRITING OF HONGSHANG

PREPARED BY

CHECKED BY

APPROVED BY

H-2F(YG)

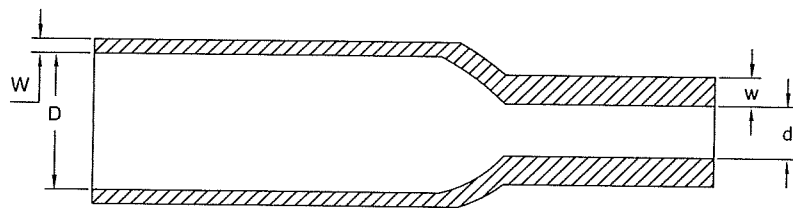

Notes:

- ◆ Crosslinked polyolefin
- ◆ Highly flame retardant
- ◆ Outstanding physical, chemical properties
- ◆ Excellent electrical properties
- ◆ UV resisant
- ◆ Meet: SAE-AMS-DTL-23053/5 Class 1 & 3
- ◆ Operating temperature : -55°C to +135°C
- ◆ Min.shrink temp. : 70°C
- ◆ Min.full recovery temp.: 100°C
- ◆ Longitudinal shrinkage : ±5%
- ◆ Shrink ratio : 2:1
- ◆ RoHS compliant

Specification mm	As supplied (mm)		After recovered (mm)		Tube shape	Standard length (meters/roll)
	Inside diameter (min)(D)	Eccentricity (max) (%)	Inside diameter(max) (d)	Wall thickness (min)(w)		
2.4/1.2	2.4	30	1.2	0.42	o	200
3.2/1.6	3.2		1.6	0.42	o	200
4.8/2.4	4.8		2.4	0.52	o	100
6.4/3.2	6.4		3.2	0.54	o	100
9.5/4.8	9.5		4.8	0.54	-	100

1	INITIATED	DW-H-2F(YG)-001	A/0	2015-11-23
ISSUE	NOTES	DRAWN NO	VERSION.	DATE


Hongshang

Hongshang Heat Shrinkable
Materials Co.,Ltd.

NAME	H-2F(YG)	SCALE	NTS	Thin Wall Tubing		SHT. 2 OF 1 SHTS
DATE	2015-11-23	DIM IN	MM	PROJECTION		
TITLE H-2F(YG) Yellow & Green Striped, Flexible, Flame Retardant Tuing 2:1				PART NO	MATERIAL:	

DRAWING NO DW-H-2F(YG)-002	SHT. 2 OF 2 SHTS	© THIS COPYRIGHT OF THIS DRAWING IS RESERVED BY HONGSHANG. IT IS NOT COPIED, REPRODUCED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE CONSENT IN WRITING OF HONGSHANG	PREPARED BY	CHECKED BY	APPROVED BY

H-2F(YG)

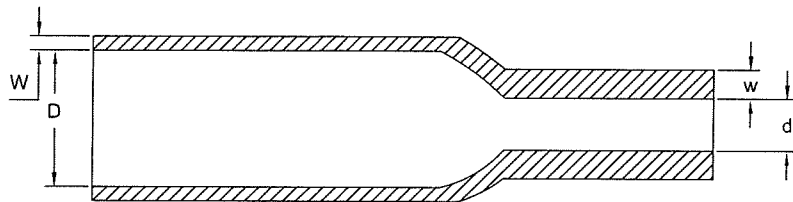

Notes:

- ◆ Crosslinked polyolefin
- ◆ Highly flame retardant
- ◆ Outstanding physical, chemical properties
- ◆ Excellent electrical properties
- ◆ UV resisant
- ◆ Meet: SAE-AMS-DTL-23053/5 Class 1 & 3
- ◆ Operating temperature : -55°C to +135°C
- ◆ Min.shrink temp. : 70°C
- ◆ Min.full recovery temp.: 100°C
- ◆ Longitudinal shrinkage : ±5%
- ◆ Shrink ratio : 2:1
- ◆ RoHS compliant

Specification mm	As supplied (mm)		After recovered (mm)		Tube shape	Standard length (meters/roll)
	Inside diameter (min)(D)	Eccentricity (max) (%)	Inside diameter(max) (d)	Wall thickness (min)(w)		
12.7/6.4	12.7	30	6.4	0.62	-	50
16/8.0	16		8.0	0.67	-	50
18/9.0	18		9.0	0.76	-	50
19.1/9.5	19.1		9.5	0.76	-	50
25.4/12.7	25.4		12.7	0.86	-	50
31.8/15.9	31.8		15.9	0.86	-	50
50.8/25.4	50.8	40	25.4	0.97	-	25
76.2/38.1	76.2		38.1	1.17	-	25
101.6/50.8	101.6		50.8	1.30	-	30

					<p style="text-align: center;">Hongshang</p> <p>Hongshang Heat Shrinkable Materials Co.,Ltd.</p>	NAME	H-2F(YG)	SCALE	NTS	Thin Wall Tubing		SHT. 3 OF 2 SHTS
						DATE	2015-11-23	DIM IN	MM	PROJECTION		
1	INITIATED	DW-H-2F(YG)-002	A/0	2015-11-23		TITLE H-2F(YG) Yellow & Green Striped, Flexible, Flame Retardant Tuig 2:1					PART NO	MATERIAL:
ISSUE	NOTES	DRAWN NO	VERSION.	DATE								