

PRODUCT DATASHEET

SF CIRCULAR 350 S 18 W 3000 K IP44 WT

SURFACE CIRCULAR 350 SENSOR | Wall and ceiling luminaire with IP44 and high frequency sensor



Areas of application

- Corridors
- Stairways
- Bathrooms
- Foyers

Product benefits

- Easy adjustment of sensor range, daylight detection and hold time
- High luminous efficacy
- Energy savings of up to 55 % compared to luminaires that use CFL
- Easy and quick installation
- Very homogenous light
- 3 years guarantee

Product features

- High frequency sensor for daylight and motion detection
- Beam angle: 120°
- Type of protection: IP44 (ceiling mounting), IP20 (wall mounting)
- Impact resistance: IK03




- Metal housing, PMMA cover
- Ambient temperature in operation: -20...+40 °C

TECHNICAL DATA**Electrical data**


Nominal wattage	18.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	153 mA
Inrush current	15 A
Inrush current time T_{H50}	200 μ s
Max. no. of lum. on circuit break. B16 A	31
Max. no. of lum. on circuit break. C10 A	26
Max. no. of lum. on circuit break. C16 A	42
Power factor λ	≥ 0.5
Total harmonic distortion	< 120 %
Protection class	I
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	1440 lm
Luminous efficacy	80 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	> 80
Standard deviation of color matching	< 5 sdc _m
Luminous intensity	-
Low flicker	Yes
Flickering metric (Pst LM)	-
Stroboscope effect metric (SVM)	-
Photobiological safety group acc. to EN62778	RG0
Beam angle	120 °

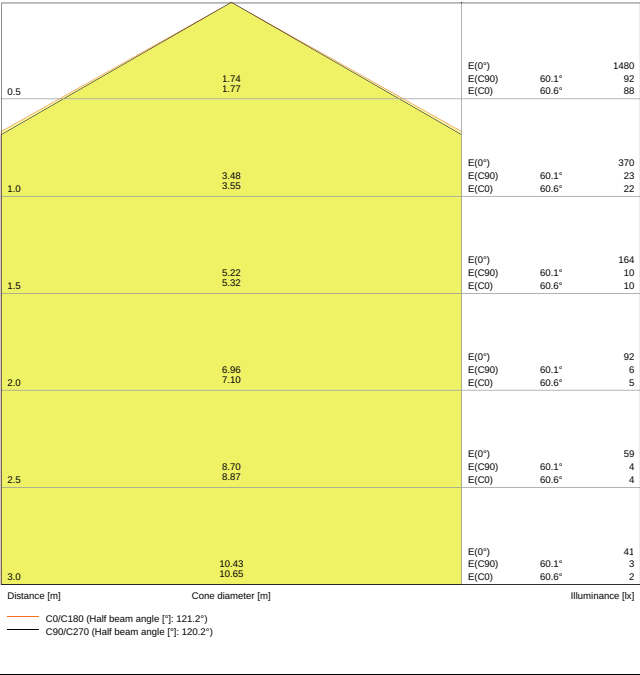


LDC typ cone

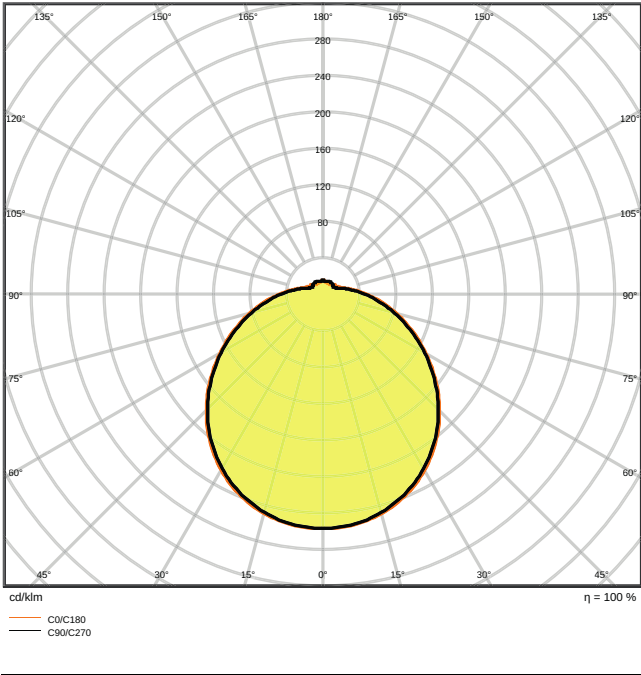

LDC typ polar

Dimensions & Weight

Diameter	350.00 mm
Height	115.00 mm
Product weight	655.00 g

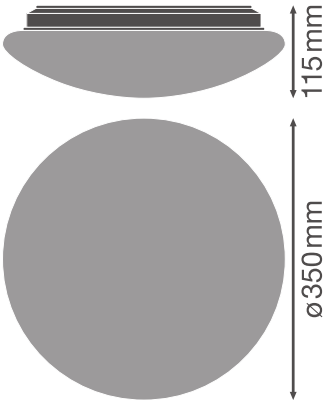

Materials & Colors

Product color	White
Housing color	White
Body material	Steel
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	PMMA
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-25...+70 °C
Type of connection	Screw terminal, 3-Pole
Type of protection	IP44
Protection class IK (shock resistance)	IK03
Dimmable	No
Mounting type	Surface
Mounting location	Ceiling / Wall
LED module replaceable	Not replaceable

Lifespan

Lifespan L70/B50 at 25 °C	30000 h
Lifespan L80/B10 at 25 °C	22000 h
Lifespan L90/B10 at 25 °C	15000 h
Number of switching cycles	50000

Sensor

Type of sensor	Motion / Light
Sensor technology	Microwave
Sensor detection angle	110 °
Sensor controlled switching time	5 s/1 min/3 min/10 min
Detection range of motion sensor	8 m
Detection threshold of daylight sensor	25 lx
Sensor IP rating	IP44

Certificates & Standards

Standards	CE / CB / TÜV SÜD / EAC
-----------	-------------------------



Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No

EQUIPMENT / ACCESSORIES

- Replacement cover optional available

DOWNLOAD DATA

DOWNLOAD DATA	
	User instruction SURFACE CIRCULAR
	PRODUCT DATASHEET SF CIRCULAR 350 18 W 3000 K WT
	Tender documents Tender Text 4058075314931
	Declarations of conformity Declaration of Conformity SF Circular 250 350 S IP44 LEDV
	Declarations of conformity CE Declaration Surface C Sensor
	On-Pack-Info Legal Insert Surface
	IES file (IES) SF CIRCULAR 350 18W 3000K S IP44
	LDT file (Eulumdat) SF CIRCULAR 350 18W 3000K S IP44
	R3D file (Relux 3D Model) SURFACE CIRCULAR 350
	M3D file (3D Model) SURFACE CIRCULAR 350
	UGR file (UGR table) SF CIRCULAR 350 18W 3000K S IP44

LOGISTICAL DATA



Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075314931	Folding box 1	386 mm x 386 mm x 120 mm	1024.00 g	17.88 dm ³



Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075314948	Shipping box 5	625 mm x 410 mm x 410 mm	6136.00 g	105.06 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



References / Links

- For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

