

H07V2-K Eca (90°C) 450/750V

H07V2-K 4 (RK 90°C) 450/750V

Contact

Product Management
service.nnl@nexans.com

Nexans Ref.: 11183540-001-02

Country Ref.: 0389002

EAN 13: 7330000121843

The cable is intended to be used for inside couplings in switch cabinet boxes and similar applications.

DESCRIPTION


H07V2-K is a lead free, PVC insulated, connecting cable with one circular, multi stranded copper conductor. The cable is designed according to EN 50525-2-31. The conductor has resistance according to EN 60228 class 5. The insulation is marked "NEXANS GS H07V2-K 0,75 SEMKO (HAR) E. H07V2-K meets the requirements for CPR class E.

Certification

Certified by INTERTEK SEMKO.

Quality system

Certified according to ISO 9001, IRIS, ISO/TS 16949 and ISO 14001.

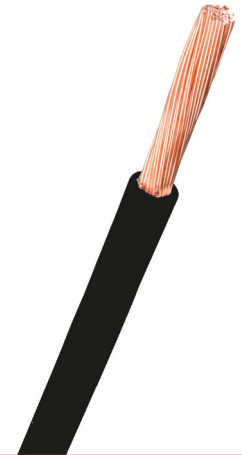

DECLARATION OF PERFORMANCE

E_{ca}

STANDARDS

International EN 50525-2-31



Halogen free
No



Conductor flexibility
Class 5



Rated Voltage U₀/U (Um)
450 / 750 V



Flame retardant
IEC 60332-1



Operating temp.
0 - 90 °C

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

Generated 5/11/22 www.nexans.nl Page 1 / 2

The Nexans logo, featuring a stylized red 'N' followed by the word 'nexans' in a black, lowercase, sans-serif font.

H07V2-K Eca (90°C) 450/750V

H07V2-K 4 (RK 90°C) 450/750V

Contact

Product Management
service.nnl@nexans.com

CHARACTERISTICS

Construction characteristics

Colour	Black
Conductor material	Bare copper
Insulation	PVC
Halogen free	No
Conductor flexibility	Class 5
Conductor shape	Circular

Dimensional characteristics

Number of cores	1
Conductor cross-section	4 mm ²
Number of core wires (nb x mm Ø)	48 x 0.31 mm Ø
Conductor diameter	2.5 mm
Average insulation thickness	0.8 mm
Nominal outer diameter	4.05 mm
Approximate weight	45 kg/km

Electrical characteristics

Max. DC resistance of the conductor at 20°C	4.95 Ohm/km
Rated Voltage U ₀ /U (U _m)	450 / 750 V

Usage characteristics

Length	100 m
Packaging	Ring
Flame retardant	IEC 60332-1
Operating temperature, range	0 - 90 °C
Bending factor when installed	4 (xD)

SELLING AND DELIVERY INFORMATION

H07V2-K is delivered in specified lengths. The package is marked with manufacturer, type of cable, length and manufacturing date. On the label on boxes upon request also the customer item number and/or order number.