

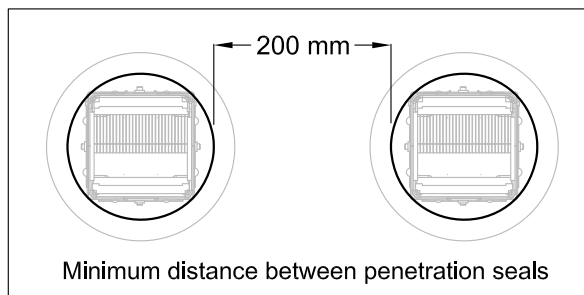


#### Rigid floors

Floor thickness	≥ 150 mm
Ø max cable	Ø21 mm
Cable loading	0% to 100%
Opening size	Ø 102 mm
Performance	EI 120
Fire resistance	EN 1366-3
Certification	ETA - 13/0993


Not at scale. Units in millimeters

Please refer to the CM250220 Installation Sheet

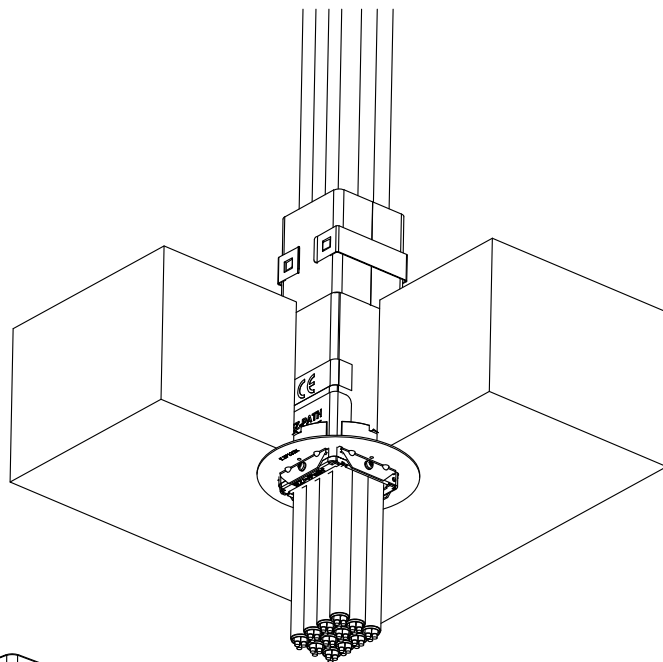

**CM250220**  
EZP133KT

+

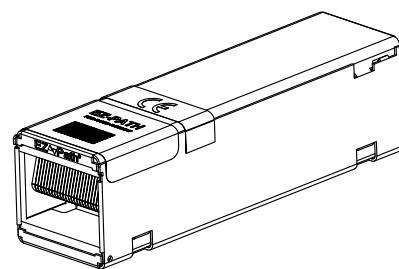

**CM250018**  
EZD33T

