


# STANDARD ARMS

## CONICAL POLES


Product sizing: standard EN 40-3-3  
 Product manufacturing: standard EN 40-5  
 Raw material: low-silicon steel (Si + P ≤ 0.04%)  
 Zinc coating: international standard EN ISO 1461  
 (layer thickness typically <90 µm).

### UPRIGHT ARMS




| Arm Type | Pole top diameter Ø (mm) | Height (mm) | Spigot (mm) Ø |
|----------|--------------------------|-------------|---------------|
| S100BK   | 60                       | 1500        | Ø60           |
| S200BK   | 76                       | 1500        | Ø60 L100      |
| S200CK   | 89                       | 1500        | Ø60 L100      |

### SINGLE ARMS

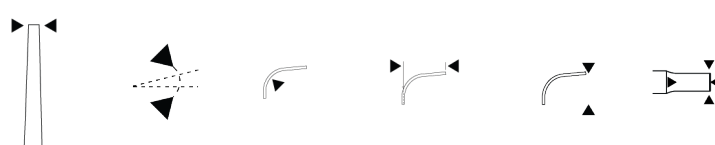

| Arm Type | Pole top diameter Ø (mm) | Slope ° | Bend radius | Outreach (mm) | Height (mm) | Spigot (mm) Ø |
|----------|--------------------------|---------|-------------|---------------|-------------|---------------|
| P110BK   | 60                       | 5°      | 500         | 1000          | 1500        | Ø60           |
| P125BK   | 60                       | 5°      | 500         | 2500          | 1500        | Ø60           |
| P210BK   | 76                       | 5°      | 630         | 1000          | 1500        | Ø60 L100      |
| P225BK   | 76                       | 5°      | 630         | 2500          | 1500        | Ø60 L100      |
| P225CK   | 89                       | 5°      | 750         | 2500          | 1500        | Ø60 L100      |

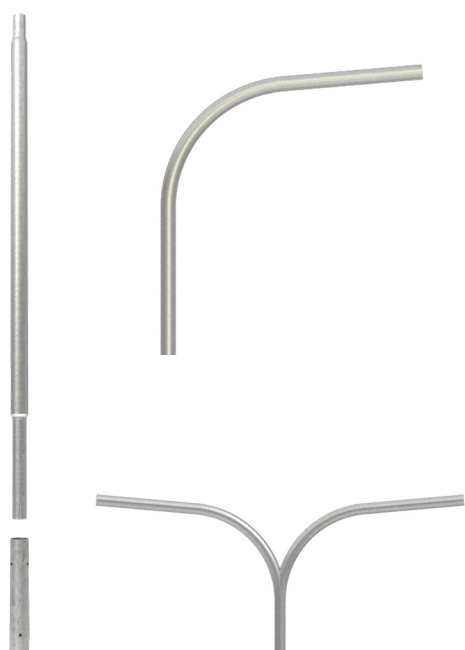

### DOUBLE ARMS



| Arm Type | Pole top diameter Ø (mm) | Slope ° | Bend radius | Outreach (mm) | Height (mm) | Spigot (mm) Ø |
|----------|--------------------------|---------|-------------|---------------|-------------|---------------|
| T110BK   | 60                       | 5°      | 500         | 1000          | 1500        | Ø60           |
| T115BK   | 60                       | 5°      | 500         | 1500          | 1500        | Ø60           |
| T210BK   | 76                       | 5°      | 630         | 1000          | 1500        | Ø60 L100      |
| T225BK   | 76                       | 5°      | 630         | 2500          | 1500        | Ø60 L100      |
| T310BK   | 89                       | 5°      | 750         | 1000          | 1500        | Ø60 L100      |
| T325BK   | 89                       | 5°      | 750         | 2500          | 1513        | Ø60 L100      |

Spigot: diameter 60 mm and length 100 mm


Attachment of the arm: There are two sets of screws with 3 x 120° division at the top of the pole (not in straight conical poles) to attach the arm easily and securely.

# STANDARD ARMS

## STEPPED POLES


Product sizing: standard EN 40-3-3  
 Product manufacturing: standard EN 40-5  
 Raw material: low-silicon steel (Si + P ≤ 0.04%)  
 Zinc coating: international standard EN ISO 1461  
 (layer thickness typically <90 µm).

## UPRIGHT ARMS



| Arm Type | Pole top diameter Ø (mm) | Height (mm) | Spigot (mm) Ø |
|----------|--------------------------|-------------|---------------|
| S100BO   | 89                       | 1500        | Ø60           |
| S200BO   | 114                      | 1500        | Ø60 L100      |
| S200CO   | 140                      | 1500        | Ø60 L100      |


## SINGLE ARMS

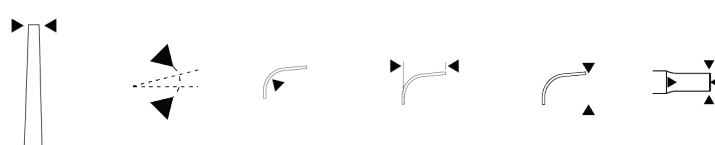

| Arm Type | Pole top diameter Ø (mm) | Slope ° | Bend radius | Outreach (mm) | Height (mm) | Spigot (mm) Ø |
|----------|--------------------------|---------|-------------|---------------|-------------|---------------|
| P110BO   | 89                       | 5°      | 500         | 1000          | 1500        | Ø60           |
| P125BO   | 89                       | 5°      | 500         | 2500          | 1500        | Ø60           |
| P210BO   | 114                      | 5°      | 630         | 1000          | 1500        | Ø60 L100      |
| P225BO   | 114                      | 5°      | 630         | 2500          | 1500        | Ø60 L100      |
| P225CO   | 140                      | 5°      | 750         | 2500          | 1500        | Ø60 L100      |



## DOUBLE ARMS

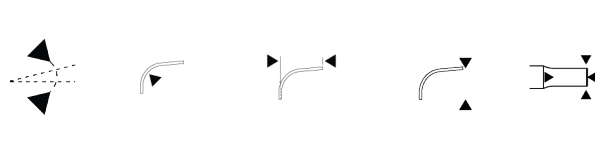

| Arm Type | Pole top diameter Ø (mm) | Slope ° | Bend radius | Outreach (mm) | Height (mm) | Spigot (mm) Ø |
|----------|--------------------------|---------|-------------|---------------|-------------|---------------|
| T110BO   | 89                       | 5°      | 500         | 1000          | 1500        | Ø60           |
| T210BO   | 114                      | 5°      | 630         | 1000          | 1500        | Ø60 L100      |
| T225BO   | 114                      | 5°      | 530         | 2500          | 1500        | Ø60 L100      |
| T310BO   | 140                      | 5°      | 750         | 1000          | 1537        | Ø60 L100      |
| T325BO   | 140                      | 5°      | 750         | 2500          | 1500        | Ø60 L100      |
| T225CO   | 140                      | 5°      | 750         | 2500          | 1500        | Ø60 L100      |

Spigot: diameter 60 mm and length 100 mm

Attachment of the arm: There are two sets of screws with 3 x 120° division at the top of the pole to attach the arm easily and securely.