

Cabinet LED luminaire with switch


Light fitting SOL2000, linear 1200mm, 3000 K, opal cover



Code: SOL2000M3KO/ND

EAN: 8596099022143

This product contains a light source with energy efficiency class D

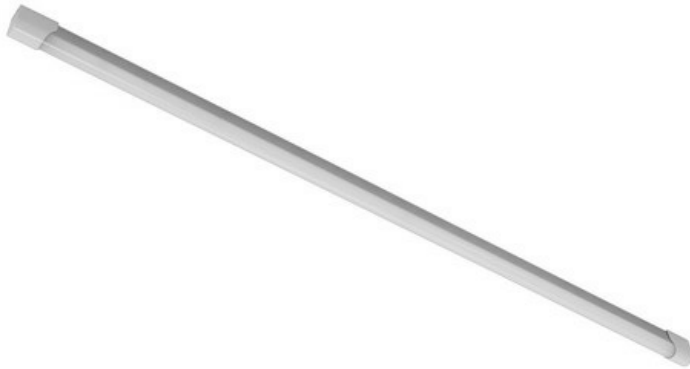

Luminaire properties

Product category:	Ceiling / wall luminaires	Effective luminous flux (lm):	2200
System power (W):	20	Luminaire efficacy (lm/W):	110
Rated lifetime L70/B50 (h):	30000	Degree of protection (IP):	IP20
Color housing:	Aluminium	Material housing:	Aluminium
Light source included:	Yes		
Suitable for wall mounting:	Yes		
Suitable for surface mounting:	Yes	Suitable for ceiling mounting:	Yes
Made in Czech republic:	Yes		

Light source

Light source type:	LED	Color temperature (K):	3000
Color rendering index CRI:	80-89	Replaceability:	Removeable light source , without ballast
Light source type:	1990860183003	Energy efficiency class:	D

Optical system

Optical system:	KO	Light outlet:	Direct
Light sharing:	Symmetric	Material cover:	Plastic, opal
Radiation angle:	Extreme wide beam >80°		

Dimensions

Length (mm):	1200	Width (mm):	32
Height/depth (mm):	43	Built-in length (mm):	400...1050
Size version:	M	Weight (kg):	0,5

Electrical values

Protection class:	I	Connection type:	Screwed terminal
Voltage type:	AC	Type of control gear:	LED operating device current-controlled
Nominal voltage (V):	220...240	Control gear included:	Yes
Type of wiring:	Ending	No dim function:	Yes