


## LED downlight with opal cover

**Downlight MODUS SPMI LED 700lm  
V2,3000K, Ra80, 150mA non-dim, metal  
white ring 130mm**

**Code:** SPMI700KO3V2BB/ND

**EAN:** 8595073710366

This product contains a light source with energy efficiency class D

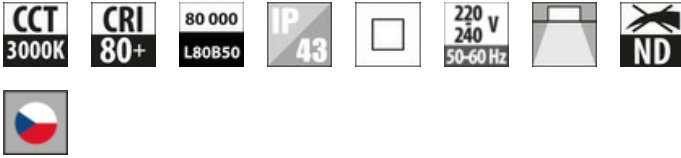

### Luminaire properties

Product category:	<b>Downlight/spot/floodlight</b>	Effective luminous flux (lm):	<b>750</b>
System power (W):	<b>8</b>	Luminaire efficacy (lm/W):	<b>94</b>
Rated lifetime L80/B50 (h):	<b>80000</b>	Degree of protection (IP):	<b>IP43</b>
Color housing:	<b>White</b>	Surface protection:	<b>Powder coating</b>
Material housing:	<b>Aluminium</b>		
Light source included:	<b>Yes</b>		
Suitable for built-in mounting:	<b>Yes</b>	Made in Czech republic:	<b>Yes</b>

### Light source

Light source type:	<b>LED</b>	Color temperature (K):	<b>3000</b>
Color rendering index CRI:	<b>80-89</b>	Colour consistency (McAdam ellipse):	<b>SDCM3</b>
Replaceability:	<b>Removeable light source, replaceable ballast</b>		
Light source type:	<b>224060401</b>	Energy efficiency class:	<b>D</b>

## Optical system

Optical system:	<b>SPMI</b>	Light outlet:	<b>Direct</b>
Reflector:	<b>High-gloss</b>	Light sharing:	<b>Symmetric</b>
Material cover:	<b>Glass opal</b>	Radiation angle:	<b>Extreme wide beam &gt;80°</b>

## Dimensions

Outer diameter (mm):	<b>130</b>	Height/depth (mm):	<b>64</b>
Built-in height/depth (mm):	<b>64</b>	Built-in diameter (mm):	<b>122</b>
Weight (kg):	<b>1</b>		

## Electrical values

Protection class:	<b>II</b>	Connection type:	<b>Pinching contact</b>
Voltage type:	<b>AC</b>	Type of control gear:	<b>LED operating device current-controlled</b>
Nominal voltage (V):	<b>220...240</b>	Control gear included:	<b>Yes</b>
Type of wiring:	<b>Ending</b>	No dim function:	<b>Yes</b>