




## LED panel for surface installation

**MODUS FITP5000, LED panel, microprizma, surfaced/recessed, rectangle C, LED 840, modul 600, driver 1200mA DALI touch dim**

**Code:** FITP5000C4KN600/DALIT

**EAN:** 8596099078393

This product contains a light source with energy efficiency class C

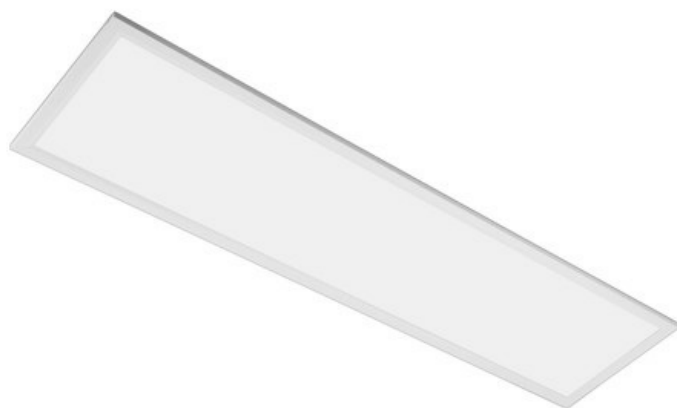

## Luminaire properties

Product category:	<b>Ceiling / wall luminaires</b>	Effective luminous flux (lm):	<b>5400</b>
System power (W):	<b>49</b>	Luminaire efficacy (lm/W):	<b>110</b>
Rated lifetime L80/B50 (h):	<b>80000</b>	Degree of protection (IP):	<b>IP40</b>
Color housing:	<b>White</b>	Material housing:	<b>Aluminium</b>
Light source included:	<b>Yes</b>		
Suitable for built-in mounting:	<b>Yes</b>		
Suitable for surface mounting:	<b>Yes</b>	Suitable for ceiling mounting:	<b>Yes</b>
Made in Czech republic:	<b>Yes</b>	Degree of protection II (IP):	<b>IP20</b>

## Light source

Light source type:	<b>LED</b>	Color temperature (K):	<b>4000</b>
Color rendering index CRI:	<b>80-89</b>	Replaceability:	<b>Removeable light source, replaceable ballast</b>
Light source type:	<b>1991820184002</b>	Energy efficiency class:	<b>C</b>

## Optical system

Optical system:	<b>KN</b>	Light outlet:	<b>Direct</b>
Anti-glare limiting UGR:	<b>19</b>	Light sharing:	<b>Symmetric</b>
Material cover:	<b>Plastic, structured</b>	Fit for monitor workplace:	<b>Yes</b>
Radiation angle:	<b>Extreme wide beam &gt;80°</b>		

## Dimensions

Length (mm):	<b>1196</b>	Width (mm):	<b>296</b>
Height/depth (mm):	<b>60</b>	Built-in length (mm):	<b>410</b>
Built-in width (mm):	<b>90</b>	Built-in height/depth (mm):	<b>60</b>
Raster (mm):	<b>600</b>	Size version:	<b>M</b>
Weight (kg):	<b>6,4</b>		

## Electrical values

Protection class:	<b>I</b>	Connection type:	<b>Other</b>
Voltage type:	<b>AC</b>	Type of control gear:	<b>LED operating device current-controlled</b>
Nominal voltage (V):	<b>220...240</b>	Control gear included:	<b>Yes</b>
Dimming DALI:	<b>Yes</b>	Dimming Touch and Dim:	<b>Yes</b>