

Low Voltage Fuses NH Type class gPV

Високомощни предпазители тип NH, клас gPV

General information

Type
Class
Standard
Breaking Capacity
Rated Voltage
Rated frequency

NH photovoltaic
gPV, Series C and D
IEC 60269-6
30kA
DC 1000V and DC 1500V
50 Hz



Type Тип	Rated current Ном. ток	Rated current Ном.ток	Order № Каталожен №	Power dissipation Загуба на мощност	Weight Тегло
	V	A		W	kg
1	1000V	50	3601050	14.1	0,45
		63	3601063	15.2	
		80	3601080	19.8	
		100	3601100	22.2	
		125	3601125	25.4	
		160	3601160	26.1	
1L	1000V	200	3601200	28.5	0.84
		160	3601160L	28.2	
		200	3601200L	30.1	
1XL	1500V	50	3601050XL	15.7	0.97
		63	3601063XL	18.5	
		80	3601080XL	21.1	
		100	3601100XL	25.4	
		125	3601125XL	30.2	
		160	3601160XL	31.3	
2	1000V	200	3602160	25.7	0.67
		200	3602200	27.8	
		250	3602250	32.5	
2L	1000V	200	3602200L	35.2	1.13
		250	3602250L	39.5	
2XL	1500V	200	3602200XL	43.1	1.3
		250	3602250XL	47.2	
		200	3603200	45.1	
3	1000V	250	3603250	47.1	0.89
		315	3603315	56.2	
		400	3603400	59.0	
3L	1500V	315	3603315L	59.1	2.1
		400	3603400L	70.5	


Low Voltage Solid Links NH Type

Шунтови предпазители тип NH

General information

Type:
Rated Voltage

NH Solid links
AC 500V, 690V

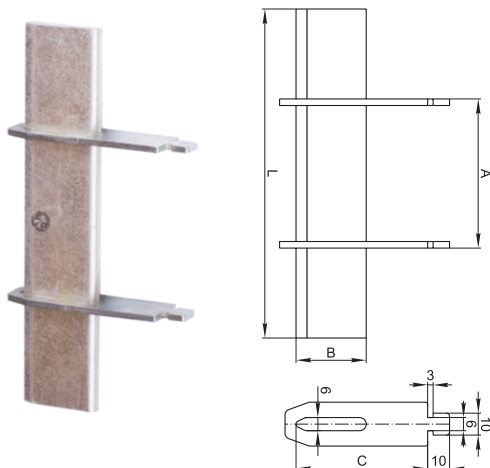

Type Тип	Rated current Ном. ток	Order № Каталожен №	Dimensions Размери			
			L	B	C	A
mm						
00	160	3520160	78.5	15	35	49
0	160	3500160	125	15	35	68
1	250	3500250	135	20	40	68
2	400	3500400	150	25	48	68
3	630	3500630	150	32	60	68
4	1250	3501250	200	51	87	68
4a	1600	3501600	200	50	86	89