




The Fiber Access Terminal Box ORM 2 is designed to terminate 2 to 4 optical fibers at a customer terminal point or interconnect Fiber Optic Cables. It is installed indoors on a wall. Inputs and outputs can vary by used panels.

- ▶ Capacity 4 optical connectors
- ▶ Connector holder SC simplex, SC duplex, ST, FC, E2000, LC
- ▶ Maximum capacity is 6 optical splices
- ▶ Direct fiber termination by a connector
- ▶ Placement of optical fiber reserve
- ▶ Easy assembly
- ▶ Wall-mounted
- ▶ Coverage degree IP 20
- ▶ Use for fibers G652d and G657a, b

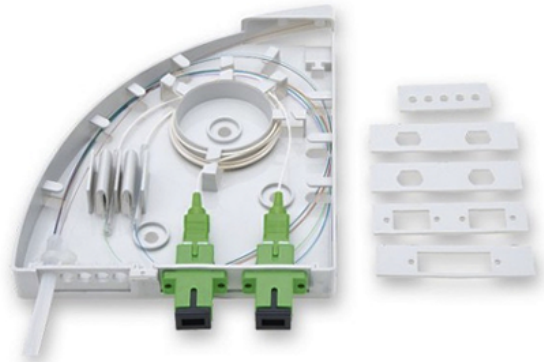

TECHNICAL SPECIFICATIONS

Ingress Protection	IP20
Impact Protection	IK04
Material	ABS
Color	light gray RAL 7035
Dimensions (H × W × D)	140 × 109 × 23 mm
Weight	0.1 kg

ORDERING CODES

8523.20/0000F	Fiber Access Terminal Box ORM 2
---------------	---------------------------------



More information: <https://www.micostelcom.com/en/fiber-access-terminal-boxes/fiber-access-terminating-box-orm-2>

MICOS
TELCOM s.r.o.

+420 582 307 511
+420 582 307 688

telcom@micostelcom.cz
www.micostelcom.com