


Cable Proposal CP4132-B



RTRYVA 15/9 12x4F G657A2 Orange

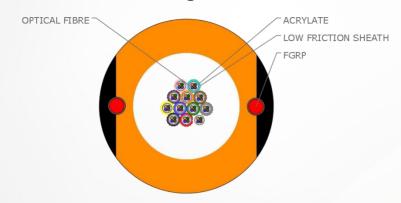

Product Description

A single metal free 15/9 PE microduct with FGRP rods built into the wall, the product comes with a number of pre-installed identifiable fibre elements. The bundle is designed for burial in suitably prepared ground (no sharp aggregate) or for installation into duct.

Product Details

Product Diameter 15mm Product Weight 107g/m

Colour Orange, 2x black stripe(s)

Metal FreeYesMinimum Bend Radius (Note 4)20DSuitability for Outdoor UseYes

Fibre Elements Maximum of 12 x 4f PP FU

Max pullback distance up to 150m *dependant on exact route

GRP 2x 1.5mm nominal Installation temperature -15°C to +50°C

Operational temperature -40°C to +70°C

Attenuation 0.38 dB max at 1310nm 0.25 dB max at 1550nm

0.25 dB max at 1550nm 0.35 dB max at 1625nm

Typical Fibre Colours (or to customer specification)

Number	1	2	3	4			
Colour	blue	orange	green	brown			
Marking							

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Emtelle can take no responsibility for actions taken based on the information contained in this document. Emtelle reserves the right to make changes to this document without notice. All sales of product are subject to Emtelle's terms and conditions of sale only, which can be found on Emtelle's website

website.

This document is protected by copyright (c) Emtelle Group [2019]. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Emtelle UK Limited will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers.

www.emtelle.com



Cable Proposal CP4132-B

Typical Fibre Sheathing Colours (or to customer specification)

Number	1	2	3	4	5	6	7	8
Colour	blue	orange	green	brown	grey	white	red	black
Marking	-	-	-	-	-	-	-	
Number	9	10	11	12				
Colour	yellow	violet	pink	aqua	-			
Marking	-	-	-	-				

Note 1: Diameters and thicknesses are measured to the nearest 0.1mm.

Note 2: All dimensions and weight are 'nominal'.

Note 3: 'Nominal' data is based on mid-spec, and is for information only, not for inspection purposes.

Note 4: 'D' is the appropriate product diameter for the bending direction.

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Emtelle can take no responsibility for actions taken based on the information contained in this document. Emtelle reserves the right to make changes to this document without notice. All sales of product are subject to Emtelle's terms and conditions of sale only, which can be found on Emtelle's website.

website.

This document is protected by copyright (c) Emtelle Group [2019]. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Emtelle UK Limited will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers.

www.emtelle.con