

Eaton EP-400212

Catalog Number: EP-400212

Eaton Moeller series SLC Stack light compact, Green, Yellow, Red, 24 V DC, Pulsed tone, Wall mounting

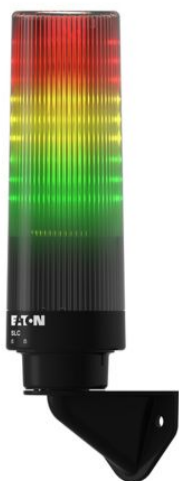


Photo is representative

General specifications

Product Name	Catalog Number
Eaton Moeller® series SLC Signal tower compact	EP-400212
	Model Code
	SLC-FW-RYG-AP-24
EAN	Product Length/Depth
4015082954925	79 mm
Product Height	Product Width
237 mm	61 mm
Product Weight	Certifications
0.2 kg	CE

defaultTaxonomyAttributeLabel

Type

Complete device

Product Category

SL signal towers

Fitted with:

Push-in

Pollution degree

3

Alarm type

Pulsed tone

Connection to SmartWire-DT

No

Mounting Method

Wall

Illumination

Continuous LED

Red blinking LED

Decibel

70 dB

Ambient operating temperature - max

50 °C

Ambient operating temperature - min

-25 °C

Leakage current

0.003 A

Outside diameter

61 mm

Radiation angle

360 °

Rated operational voltage (Ue) - max

24 V

Rated operational voltage (Ue) - min

24 V

Color

Black tube

Green

Resources

Declarations of conformity

[DA-DC-00004998.pdf](#)

[DA-DC-00004994.pdf](#)

Installation instructions

[eaton-operating-devices-stacklight-compact-slc-instruction-leaflet-il047032zu.pdf](#)

mCAD model

[eaton-slc-fw-ryg-3d-model.stp](#)

[eaton-slc_fw_ryg-drawing.dwg](#)

Yellow

Red

Lens color

Green

Yellow

Red

Voltage type

DC

Material

UV Protected material

Mounting position

As required

Degree of protection

IP66

NEMA 4X

Overvoltage category

III

Lifespan, electrical

50,000 h

Light type

Continuous light

Red blinking light

Loudness

70 db

Light modules

LED

Number of modules

1

Rated operational voltage

24V AC/DC +/-10% (50/60hz)

Terminal capacity

Push-in 6-pole

up to 1,5mm² without plastic collar

up to 0,75mm² with plastic collar

Voltage type of operating voltage

DC

Operating voltage at AC, 50 Hz - min

0 V

Operating voltage at AC, 50 Hz - max
0 V

Operating voltage at AC, 60 Hz - min
0 V

Operating voltage at AC, 60 Hz - max
0 V

Operating voltage at DC - min
24 V

Operating voltage at DC - max
24 V

Color light 1
Green

Color light 2
Yellow

Color light 3
Red



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2024 Eaton. All rights reserved.

Eaton is a registered trademark.
All other trademarks are property of their respective owners.



Eaton.com/socialmedia