

# SPILLO MINI POST

Part number 303739



## Description

Series of LED landscaping outdoor bollard and pole-top luminaires, comprising:

- Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Anti-ageing custom moulded silicone sealing gasket(s)
- IP-rated external socket-plug fast connector (QUICK), complete with factory pre-wired cable
- Anti-tear cable gland M25x1.5 for cables Ø 9 - Ø 14 mm
- Stainless steel locking hardware
- Each LED can by-passed in case of failure thanks to a coupled electronic safety device (NUD)
- The Secure Light Distribution (SLD) system guarantees uniform light distribution even in the remote case of LED failures
- Supplied with 1m factory pre-wired HORN-5 cable
- Built-in driver
- Glare control and upward light pollution laws compliant (0% ULOR rating)
- Design by ALESSANDRO PEDRETTI

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

Product data

ETIM Group:	EG000027	ETIM Class:	EC000062
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	2056	Luminaire lumen output [lm]:	1237
Luminaire wattage [W]:	16 W	Luminous efficacy [lm/W]:	77
CRI:	70	Colour temperature [K]:	3000
Colour / Finishing:	AN-g6 / Anthracite gray / Textured	IP degree of protection:	IP65
IK-J-xxIP:	IK10 20J xxg	Protection class:	II
Optic:	C/EW - Circular Extra-Wide	Net weight [kg]:	5.07
Overall diameter [mm]:	360	Overall height [mm]:	1187

Mechanical features

Shape:	Round ≥ 300 mm	Housing material:	Aluminium
Diffuser material:	Plastic	Frontal exposed area [m²]:	0.01
Lateral exposed area [m²]:	0.01	Top exposed area [m²]:	0.1

Electrical features

Voltage type:	AC/DC	Input voltage [V AC]:	220/240
Input frequency [Hz]:	0/50/60	Power factor / COS Φ:	0.95
Input voltage [V DC]:	176/276	Surge protection   Common [kV]:	4.000000
Inrush current [A/μs]:	5 / 50	C10 1.5 mm²:	52
C16 2.5 mm²:	85	B10 1.5 mm²:	31
B16 2.5 mm²:	50		

Installation


Application area:	Outdoor	Mounting type:	Area lighting
Min. ambient temperature [°C]:	-25	Max. ambient temperature [°C]:	45

Light features

MacAdam:	3	Lumen maintenance:	L80B10@60000h
Distribution of light emission:	Direct	Luminous Intensity Class:	G*6
Zero light pollution (ULR = 0%):		IPEA* (road lighting):	B
IPEA* (large areas, roundabouts):	A	IPEA* (cycle-pedestrian):	B
IPEA* (green areas):	B	IPEA* (historic city centers):	B


To maintain the regular updating of our products, PERFORMANCE in LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website [www.performanceinlighting.com](http://www.performanceinlighting.com). Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at <https://www.performanceinlighting.com/qr/company/led-warranty>

## Photometric data

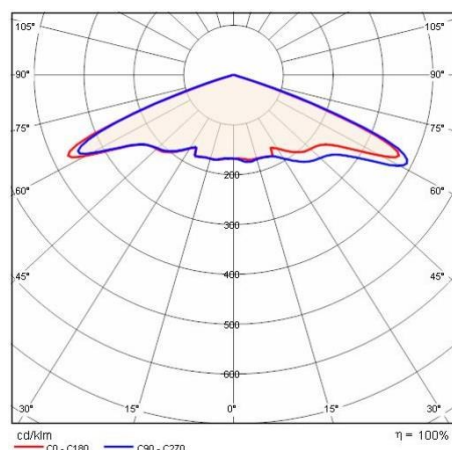

## Optional accessories

### SPILLO MINI

**310414**

Baseplate Spillo Mini