


LANTERNA NK 21

Part number 3102571

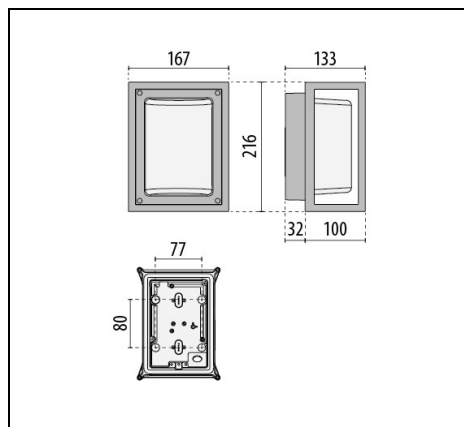

Description

Indoor and outdoor wall-mount luminaire, comprising:

- Die-cast aluminium housing and trim, polyester powder coat finish ISO 9227/12944 - ISO 9223 (C5)
- Pressed glass diffuser, internally coated, secured with the ring
- Aluminium reflector and gear tray
- Technopolymer silicone sealing gasket
- Burnished stainless steel fixing screws
- Built-in driver
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08
- Design by ROBERTO FIORATO

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qr/company/terms-and-conditions

Product data

ETIM Group:	EG000027	ETIM Class:	EC001745
-------------	----------	-------------	----------

General information

Lampholder:	LED	Light source:	LED
Lightsource lumen output [lm]:	1242	Luminaire lumen output [lm]:	730
Luminaire wattage [W]:	11 W	Luminous efficacy [lm/W]:	66
CRI:	80	Kelvin:	3000
Colour / Finish:	RB-10 / Rust / Textured	IP degree of protection:	IP65
IK-J-xxIP:	IK06 1J xx3	Insulation class:	I
Optic:	SYMMETRIC EXTRA-WIDE	Net weight [kg]:	1.826

Mechanical features

Shape:	RECTANGULAR	Housing material:	ALUMINIUM
Diffuser material:	GLASS		

Electrical features

Voltage type:	AC	Power factor / COS Φ:	0.9
Inrush current [A/μs]:	4 / 30		

Installation


Application area:	Outdoor	Mounting type:	Wall / Ceiling surface
Min. ambient temperature [°C]:	-20	Max. ambient temperature [°C]:	30
Min. distance from lighted object [m]:	0.00		

Light features

MacAdam:	3	Lumen maintenance:	L80B10@100000h
Distribution of light emission:	Direct		

To maintain the regular updating of our products, PERFORMANCE IN LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qr/company/terms-and-conditions

Photometric data

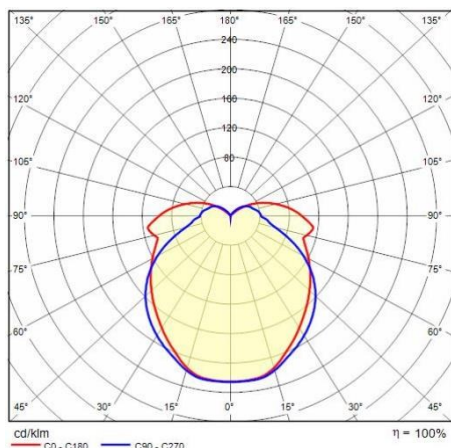

To maintain the regular updating of our products, PERFORMANCE in LIGHTING reserves the right to make changes without prior notice. For the most up to date information we always recommend you read the latest version published on the website www.performanceinlighting.com. Delivered luminaire lumen outputs and power consumptions, including losses, are subject to a tolerance of +/- 7%, and unless otherwise stated the values apply to an ambient temperature of 25°C. Terms of warranty are available at www.performanceinlighting.com/qr/qc/company/terms-and-conditions